






Pressure regulator

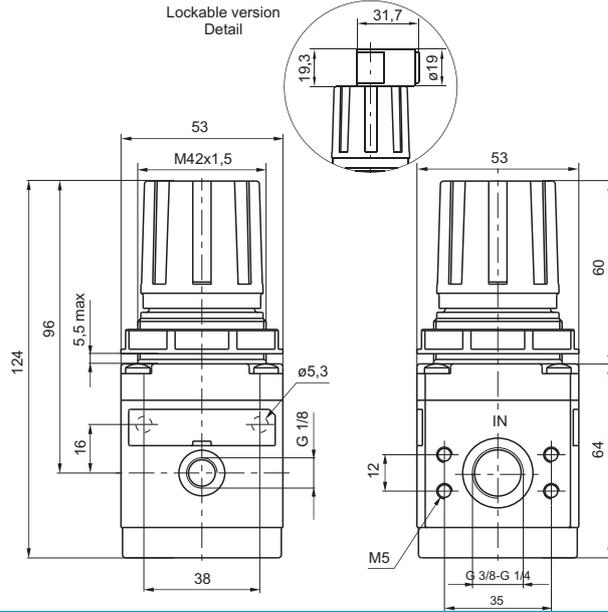

Ordering code
17202C.C.T.O

CONNECTIONS	
C	A = G 1/4"
	B = G 3/8"
ADJUSTING RANGE	
	A = 0 - 2 bar
C	B = 0 - 4 bar
	C = 0 - 8 bar
	D = 0 - 12 bar
TYPE	
T	L = Without Relieving
	SM = improved Relieving
OPTION	
O	Standard (without options)
	K = Lockable version

Example: 17202A.C
Pressure regulator with G 1/4" connections, adjusting range 0 - 8 bar with relieving.

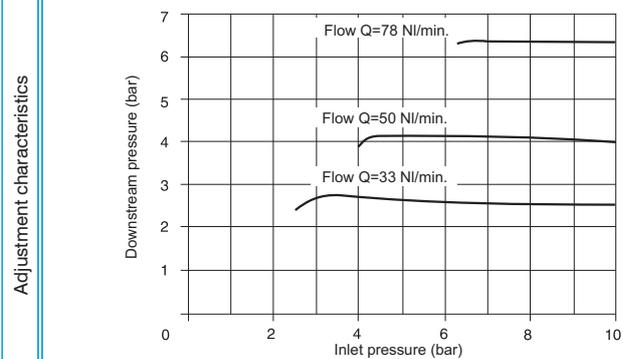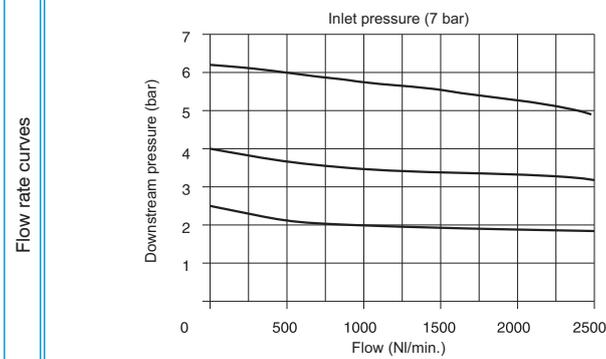

- Operational characteristic**
- Diaphragm pressure regulator with relieving.
 - Balanced poppet.
 - Lockable handle by simply pressing it downwards in the desired position.
 - Body made with light alloy.
 - Wall mounting possibility with M5 screws protected by covers.
 - Two pressure gauge connections with plug complete of seal.
 - Panel mounting bracket.

Technical characteristic

Connections	G 1/4" - G 3/8"
Max working pressure (bar)	13 bar - 1,3 MPa
Temperature °C	50°C
Pressure gauge connections	G 1/8"
Weight	gr. 390
Pressure range (bar)	0 - 2 / 0 - 4 / 0 - 8 / 0 - 12
Assembly position	Any
Wall fixing screw	M5
Max. fittings torque	25 Nm



FLU-TECH CO. LTD.

Email: sales@flutech.co.th Website: https://flutech.co.th

Tel: 02-384-6060, 086-369-5871-3 Fax: 02-384-5701 LINE OA: @flutech.co.th

Address (HQ): 845/3-4, Moo 3, Theparak Rd., T. Theparak, A. Mueang Samut Prakan, Samut Prakan, 10270, Thailand