
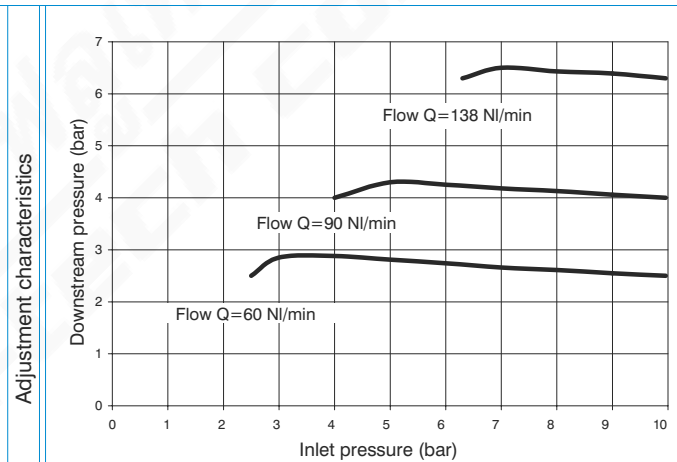


Example : T173BRMC : size 3, Regulator including gauge with Technopolymer threads, G1/2" connections, 0 to 8 bar adjusting range

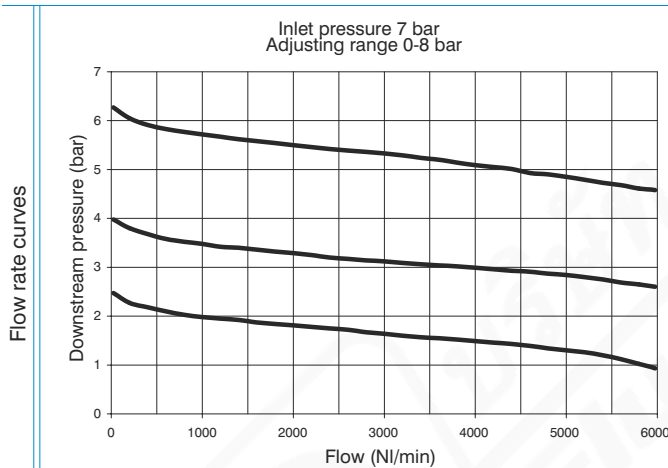

Operational characteristics	Technical characteristics		
<ul style="list-style-type: none"> - Diaphragm pressure regulator with relieving. - Low hysteresis rolling diaphragm. - Balanced system. - Available in four pressure ranges up to 12 bar. - Operating knob can be locked in position by pressing it down once the desired P2 (regulated pressure) pressure value is achieved. - Fitted with panel mounting locking ring. - Built in gauge 0-12 bar range as standard. 	Connections	G 3/8" - G 1/2"	
	Max. inlet pressure	13 bar	
<p>Note</p> <p>The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.</p>	Working temperature	-5°C +50°C	
	Weight with Technopolymer threads	gr. 370	
	Weight with threaded inserts	gr. 390	
	Pressure range	0-2 bar / 0-4 bar 0-8 bar / 0-12 bar	
	Assembly positions	Indifferent	
	Max. fitting torque (with Technopolymer threads)	G1/2" = 22 Nm	
	Max. fitting torque (with threaded inserts)	G3/8" = 25 Nm G1/2" = 30 Nm	
			<p>Ordering code</p> <p>V173OR0G0</p> <p>VERSION</p> <ul style="list-style-type: none"> V N = Metal inserts T = Technopolymer thread <p>CONNECTIONS</p> <ul style="list-style-type: none"> G A = G3/8" (only for insert versions) B = G1/2" <p>FLOW DIRECTION</p> <ul style="list-style-type: none"> D M = from left to right W = from right to left <p>ADJUSTING RANGE</p> <ul style="list-style-type: none"> A = 0-2 bar G B = 0-4 bar C = 0-8 bar D = 0-12 bar <p>OPTIONS</p> <ul style="list-style-type: none"> Standard (without options) F = Controlled relief + improved relieving L = no relieving R = Improved relieving K = Lockable version

FLU-TECH CO. LTD.

Email: sales@flutech.co.th Website: https://flutech.co.th

Tel: 02-384-6060, 086-369-5871-3 Fax: 02-384-5701 LINE OA: @flutech.co.th

Address (HQ): 845/3-4, Moo 3, Theparak Rd., T. Theparak, A. Mueang Samut Prakan, Samut Prakan, 10270, Thailand

