



### Industrial Ethernet gateway, IP65/ IP67/ IP69k

- Gateway for Industrial Ethernet standards, incl. OPC UA, for use in environments requiring a high degree of protection
- Up to 128 input and 128 output variables can be transmitted
- Simpler integration of Bürkert devices in the process control level through individually configurable device description files
- Connection of up to eight end devices or junction box modules, connection of up to 126 CANopen devices
- Integrated central configuration management for easy device replacement

Product variants described in the data sheet may differ from the product presentation and description.

#### Can be combined with

	<b>Type 8742</b> ▶ Mass Flow Controller (MFC)/ Mass Flow Meter (MFM) for gases
	<b>Type 8653</b> ▶ AirLINE Field - the valve island optimised for process automation
	<b>Type 8802</b> ▶ ELEMENT continuous control valve systems - overview
	<b>Type 3361</b> ▶ Electromotive 2 way globe control valve
	<b>Type 8605</b> ▶ PWM control electronics for electromagnetic proportional valves
	<b>Type 8681</b> ▶ Control head for decentralized automation of hygienic process valves
	<b>Type ME64</b> ▶ I/O modules IP65/ IP67/ IP69k

#### Type description

The Industrial Ethernet gateway Type ME63 is the central control unit for Bürkert products (valves, sensors, process control systems), which is based on EDIP (Efficient Device Integration Platform) and used in processes requiring a high degree of protection. Type ME63 consists of a fieldbus gateway which transmits the internal CANopen-based communication of the Bürkert field devices to all common industry standards for Industrial Ethernet. With the help of eight M12 ports, CANopen-based Bürkert field devices can be connected directly to the gateway Type ME63. The power supply of the field devices can be provided either by an M12 L-Power (up to 32A) or an A-coded M12 connector (up to 4A). One of these additional participants can be either Type ME64 (I/O module) or a passive junction box (included as an accessory part with this data sheet). The passive junction box is intended to simply integrate further participants into the proprietary bus system of the gateway Type ME63. The power supply via the M12 L-Power input can supply further field devices located close to the process via the second M12 L-Power output. Also integrated is an Ethernet switch which allows the direct integration of further field devices located close to the process in the Ethernet communication.

DTS 1000438645 EN Version: E Status: RL (released | freigegeben | valide) printed: 19.01.2022



## Table of contents

<b>1. General Technical Data</b>	<b>3</b>
<b>2. Dimensions</b>	<b>4</b>
2.1. Gateway module Type ME63 .....	4
2.2. Passive junction box as accessory module .....	5
<b>3. Device/Process connections</b>	<b>6</b>
3.1. Gateway Module Type ME63 .....	6
Connection details .....	6
Pin assignment .....	6
3.2. Passive junction box .....	7
Connection details .....	7
Pin assignment .....	7
<b>4. Product design and assembly</b>	<b>8</b>
4.1. Product features .....	8
Gateway module Type ME63 .....	8
Passive junction box .....	8
<b>5. Product accessories</b>	<b>9</b>
5.1. EDIP – Efficient Device Integration Platform .....	9
5.2. Bürkert Communicator Software .....	9
<b>6. Networking and combination with other Bürkert products</b>	<b>10</b>
6.1. Example for Type ME63 .....	10
6.2. Example for Gateway Module Type ME63 in combination with a passive junction box .....	11
<b>7. Ordering information</b>	<b>12</b>
7.1. Bürkert eShop – Easy ordering and quick delivery .....	12
7.2. Bürkert product filter .....	12
7.3. Ordering chart .....	12
7.4. Ordering chart accessories .....	13

## 1. General Technical Data

Product properties	
Dimensions	Detailed information can be found in chapter "2. Dimensions" on page 4.
Weight	400 g
Material	
Body	PC (Polycarbonate)
Status display	RGB-LED based on NAMUR NE107
Configuration memory	Micro SD card (not included in delivery) (for storage of device parameters, configuration and for easy replacement of a module)
Electrical data	
Operating voltage	24 V DC $\pm$ 10 % - residual ripple 10 % <sup>1)</sup>
Power consumption of module	2 W
Max. input current	4 A for supply via X4 (M12, A-coded, plug), 32 A for supply via X03 (M12, L-coded, plug), factory-set to X03, the module detects this automatically when supplied via X4 instead of X03
Max. output current	4 A per bÜS/CANopen connection (X1-X3, X5-X8) with supply via X03, 4 A in total with supply via X4
Process/Port connection & communication	
Communication interface (integrated switch for Industrial Ethernet)	Connections X01 and X02, M12 D-coded (socket) PROFINET, EtherNet/IP, Modbus/TCP EtherCAT, CC-Link IE Field Basic, OPC UA
Electrical connection	Via X4 (IN): M12, A-coded, or via X03 (IN) and X04 (OUT): M12, L-coded
bÜS/CANopen communication (proprietary)	X1 to X3 and X5 to X8 (M12, socket), X4 (M12, plug) - preferably for the bÜS/CANopen input for integration of the module into a bÜS/CANopen network
Approvals and Certificates	
Approvals	
CE	EU conformity
UL	cULus listed
Certificates	PROFINET (PNO) EtherNet/IP (ODVA)
Environment and installation	
Ambient temperature	-20...+60 °C
Storage temperature	-30...+80 °C
Degree of protection	IP65, IP67 and IP69k acc. to EN 60529 / IEC 60529 (with cables connected and with protective caps on unused connections)
Height above sea level	Max. 2000 m


1.) The requirements of the attached components need to be considered in the selection of the power supply as well.

## 2. Dimensions

### 2.1. Gateway module Type ME63

**Note:**

Dimensions in mm

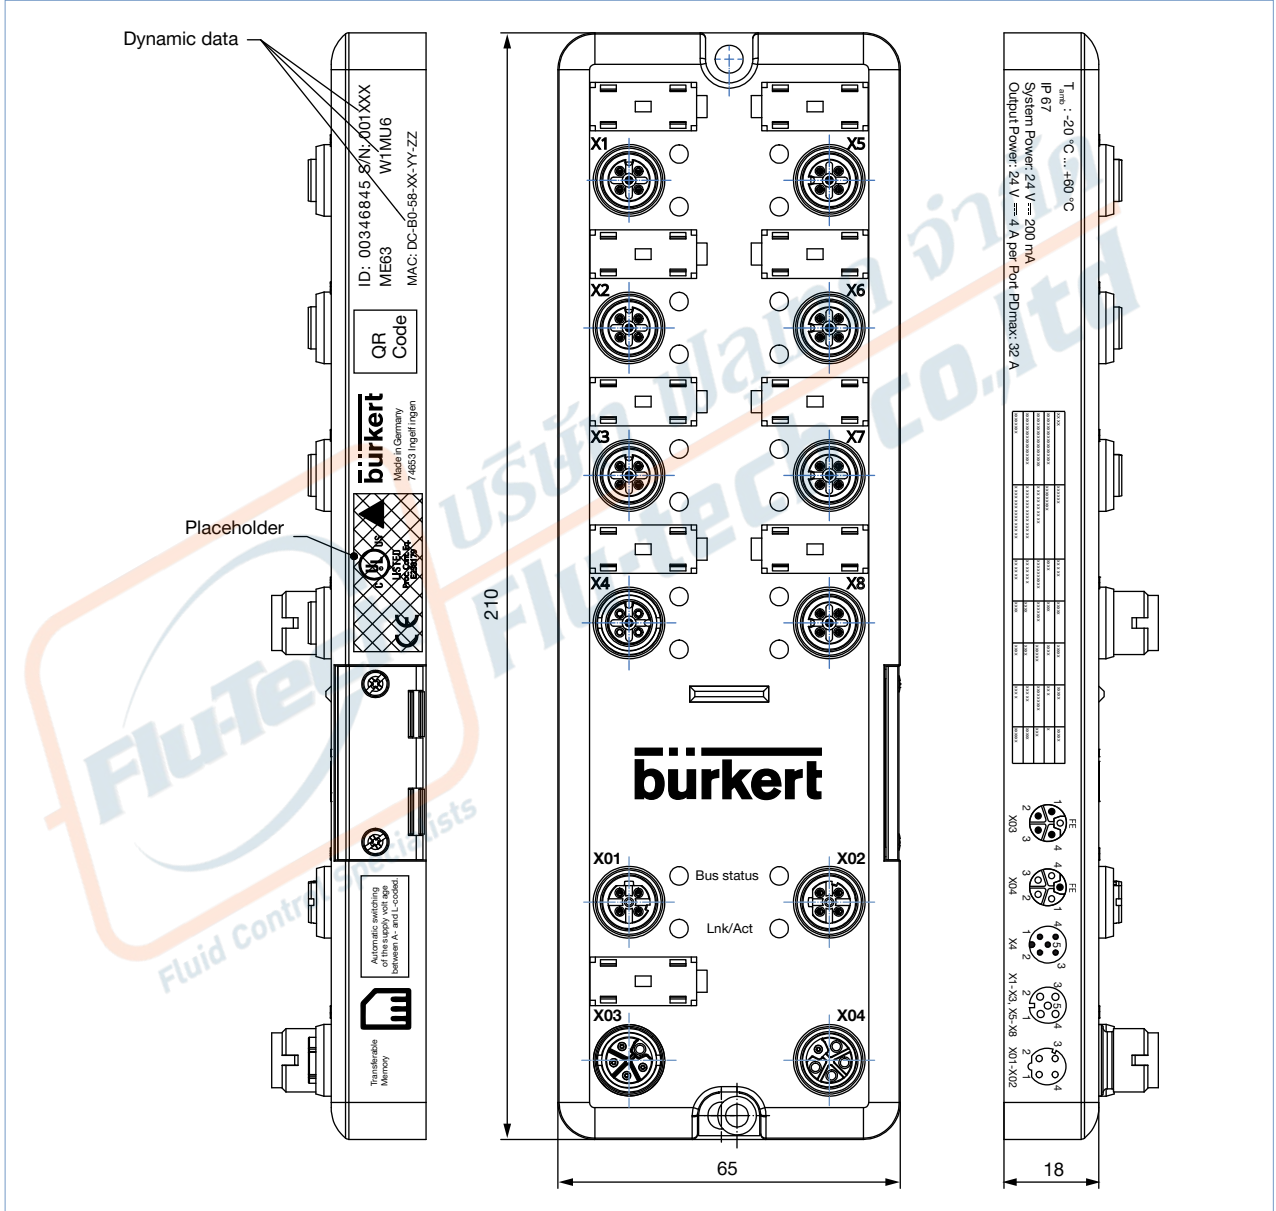


DTS 1000438645 EN Version: E Status: RL (released | freigegeben | valide) printed: 19.01.2022

## 2.2. Passive junction box as accessory module

**Note:**

Dimensions in mm

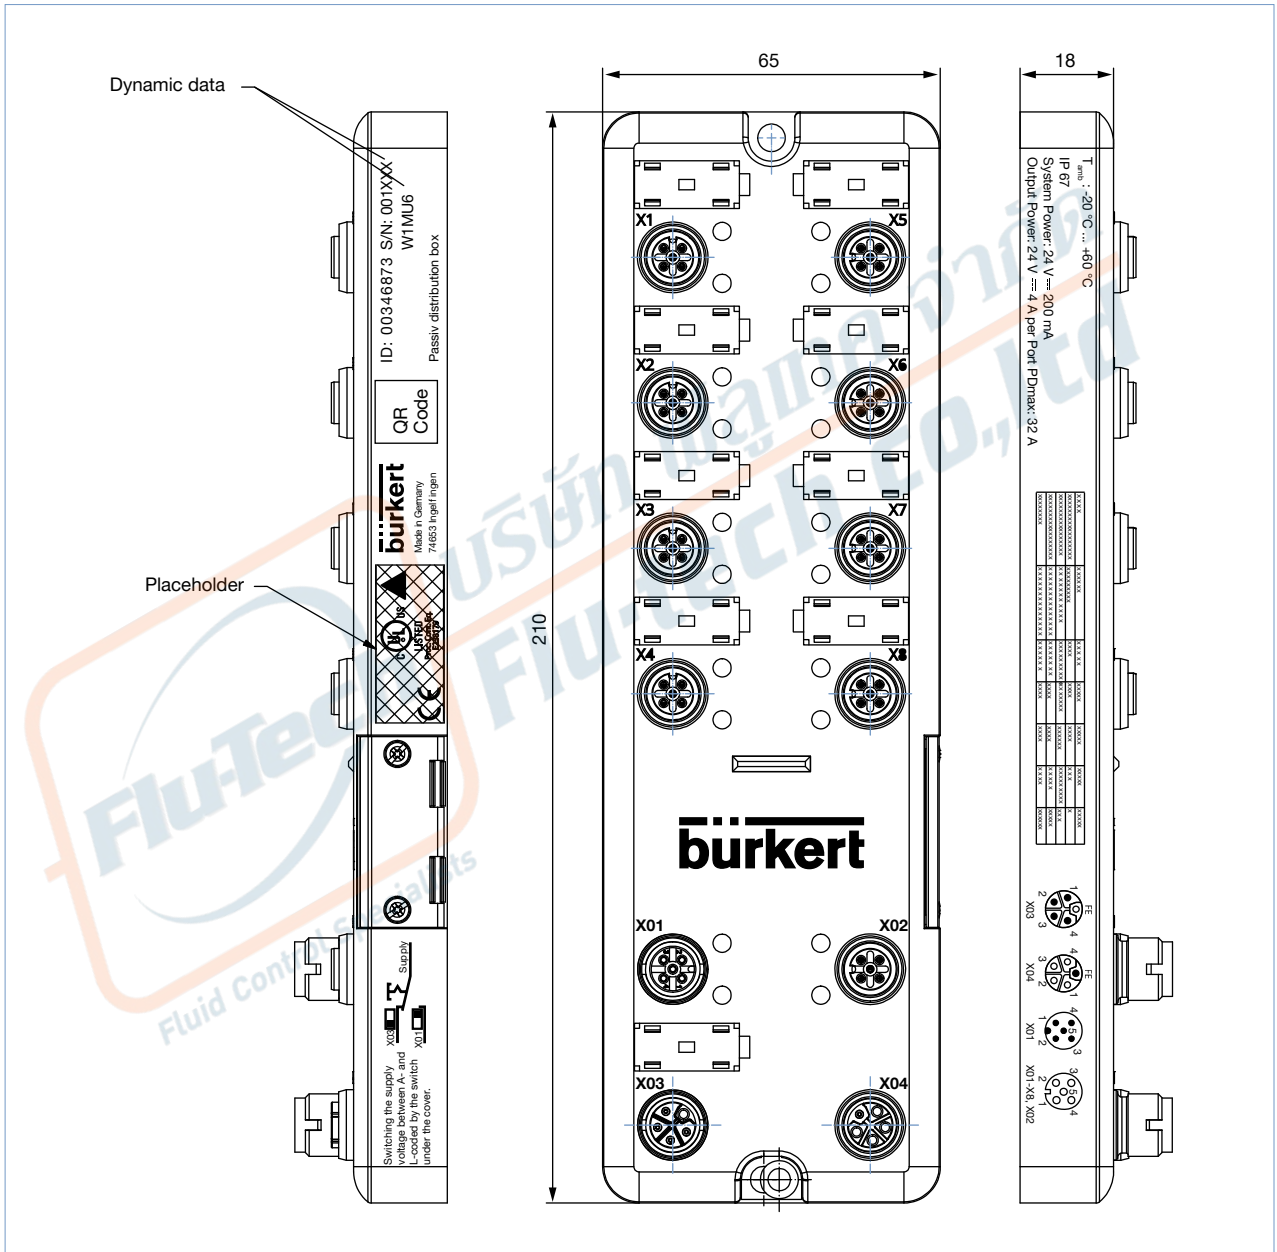

DTS 1000438645 EN Version: E Status: RL (released | freigegeben | validé) printed: 19.01.2022


### 3. Device/Process connections

#### 3.1. Gateway Module Type ME63

##### Connection details

**Note:**

Device automatically detects whether the power supply is connected to X4 or X03

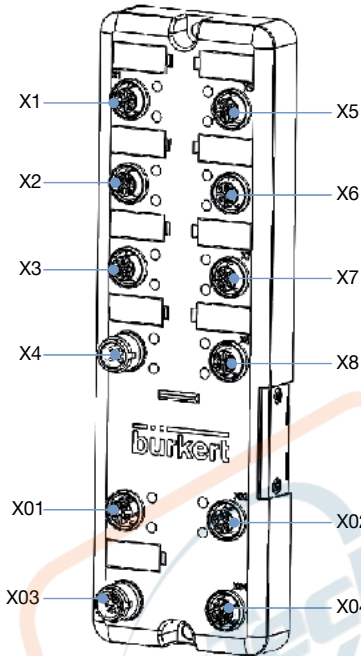


No.	Description
X1	M12-A, socket, büS/CANopen and 24 V DC, max. 4 A, for connecting a device via büS/CANopen
X2	M12-A, socket, büS/CANopen and 24 V DC, max. 4 A, for connecting a device via büS/CANopen
X3	M12-A, socket, büS/CANopen and 24 V DC, max. 4 A, for connecting a device via büS/CANopen
X4	M12-A, plug, büS/CANopen and 24 V DC, max. 4 A, preferably for büS/CANopen connection
X5	M12-A, socket, büS/CANopen and 24 V DC, max. 4 A, for connecting a device via büS/CANopen
X6	M12-A, socket, büS/CANopen and 24 V DC, max. 4 A, for connecting a device via büS/CANopen
X7	M12-A, socket, büS/CANopen and 24 V DC, max. 4 A, for connecting a device via büS/CANopen
X8	M12-A, socket, büS/CANopen and 24 V DC, max. 4 A, for connecting a device via büS/CANopen
X01	M12-D, socket, Ethernet, e.g. for the Ethernet connection of the module
X02	M12-D, socket, Ethernet, e.g. for Ethernet integration of further devices
X03	M12-L, plug, Power IN, max. 32, A for power supply
X04	M12-L, socket, Power OUT, max. 32 A, for the power supply of further devices

##### Pin assignment

**Note:**

- The L-coded M12 connection (X03, X04) is designed for connecting 2 power supplies, each up to max. 16 A.
- Both power supplies are integrated on the module and made available to all ports.

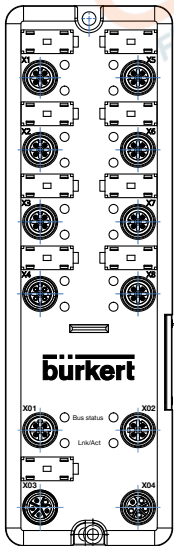


M12, X4 (plug) and X1-X3, X5-X8 (socket), A-coded		Pin	Pin assignment	Function
<b>X01</b>	<b>X02</b>	1	FE/CAN_GND	Shield
		2	24 V	Power supply
		3	GND	Power supply GND
		4	CAN_H	büS communication
		5	CAN_L	büS communication
M12, X01, X02 (socket), D-coded		Pin	Pin assignment	Function
		1	TD +	Transmitting data +
		2	RD +	Receiving data +
		3	TD -	Transmitting data -
		4	RD -	Receiving data -
M12, X03 (plug), X04 (socket), L-coded		Pin	Pin assignment	Function
<b>X03</b>	<b>X04</b>	1	24 V	Power supply
		2	GND	Power supply GND
		3	GND	Power supply GND
		4	(24 V)	Power supply
		5	FE	Shield

### 3.2. Passive junction box

#### Connection details

**Note:**

Switch the power supply from X03 to X4 via the switch located on the side, under the cover.

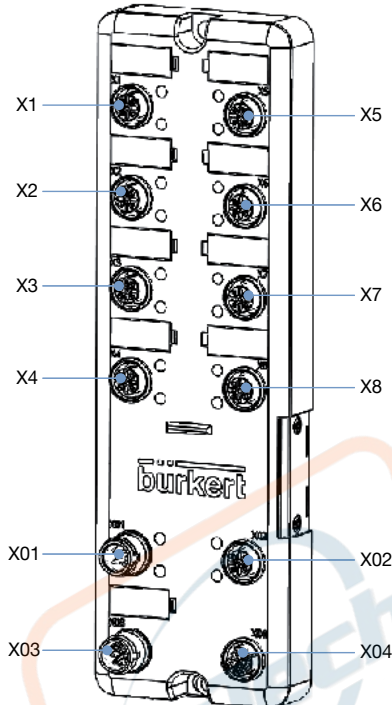


No.	Description
X1	M12-A, socket, būs/CANopen and 24 V DC, max. 4 A, for connecting a device via būs/CANopen
X2	M12-A, socket, būs/CANopen and 24 V DC, max. 4 A, for connecting a device via būs/CANopen
X3	M12-A, socket, būs/CANopen and 24 V DC, max. 4 A, for connecting a device via būs/CANopen
X4	M12-A, socket, būs/CANopen and 24 V DC, max. 4 A, for connecting a device via būs/CANopen
X5	M12-A, socket, būs/CANopen and 24 V DC, max. 4 A, for connecting a device via būs/CANopen
X6	M12-A, socket, būs/CANopen and 24 V DC, max. 4 A, for connecting a device via būs/CANopen
X7	M12-A, socket, būs/CANopen and 24 V DC, max. 4 A, for connecting a device via būs/CANopen
X8	M12-A, socket, būs/CANopen and 24 V DC, max. 4 A, for connecting a device via būs/CANopen
X01	M12-A, plug, būs/CANopen IN, for the connection būs/CANopen
X02	M12-A, socket, būs/CANopen OUT, for the integration of further būs/CANopen devices
X03	M12-L, connector, Power IN, max. 32 A, for power supply
X04	M12-L, socket, Power OUT, max. 32 A, for the power supply of further devices

#### Pin assignment

**Note:**

- The L-coded M12 connection (X03, X04) is designed for connecting 2 power supplies, each up to max. 16 A.
- Both power supplies are integrated on the module and made available to all ports.

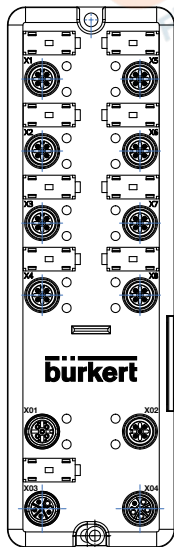


M12, X01 (plug) and X1 to X8 and X02 (socket), A-coded		Pin	Pin assignment	Function
		1	FE/CAN_GND	Shield
		2	24 V	Power supply
		3	GND	Power supply GND
		4	CAN_H	būs communication
		5	CAN_L	būs communication
M12, X03 (plug), X04 (socket), L-coded		Pin	Pin assignment	Function
		1	24 V	Power supply
		2	GND	Power supply GND
		3	GND	Power supply GND
		4	(24 V)	Power supply
		5	FE	Shield

## 4. Product design and assembly

### 4.1. Product features

#### Gateway module Type ME63

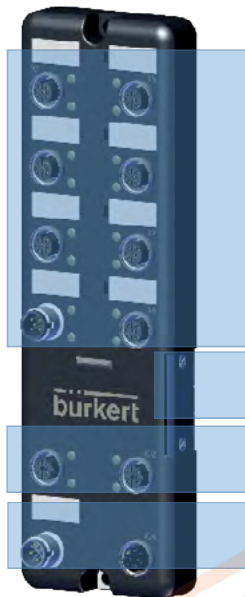

**Function:**

Connection of terminal devices or further distributors, büS/CAN-open and operating voltage on M12, A-coded

**Memory:**

Micro SD card for saving device-specific settings

**Communication:**

Ethernet, M12, D-coded

**Power supply:**

M12, L-coded

#### Passive junction box



**Function:**

Connection of terminal devices or further distributors, büS/CAN-open and operating voltage on M12, A-coded

**Switch:**

Switch-over from X03 to X01 for the power supply

**Communication:**

Integration of the devices connected via the module into a büS/CANopen network, M12, D-coded

**Power supply:**

M12, L-coded



## 5. Product accessories

### 5.1. EDIP – Efficient Device Integration Platform

EDIP is the new Bürkert device platform that will standardize the operation, communication and interfaces of many process devices (e.g. sensors, mass flow controllers). Thanks to EDIP, devices can be intelligently networked and operated with the standardized software, the Bürkert Communicator. The backbone and connecting link of EDIP is a digital interface that complies with the CANopen standard and can always be used in a manner compatible with it. EDIP offers the user the following advantages:

- Interoperability - guaranteed by the uniform interface
- Comfortable operation and display concept
- Faster and simplified commissioning
- Modularity - allows the devices to be adapted to individual customer requirements
- Easy transfer and fusion of device settings


### 5.2. Bürkert Communicator Software

#### Note:

To install the software, click [here](#) ►.

Part of Bürkert's new EDIP program (Efficient Device Integration Platform) is the Bürkert Communicator. This software can be run under MS-Windows and it is available on Bürkert's website for free. The Bürkert Communicator allows convenient system configuration and parametrization of all connected field devices. An accessory part, the bÜS stick serves as the interface between computer and process instruments (see "7.4. Ordering chart accessories" on page 13). The Communicator allows:

- Diagnostics
- Parametrization
- Registration and storage of process data
- Graphical monitoring of the process data
- To update firmware of the bÜS device connected
- Guided re-calibration

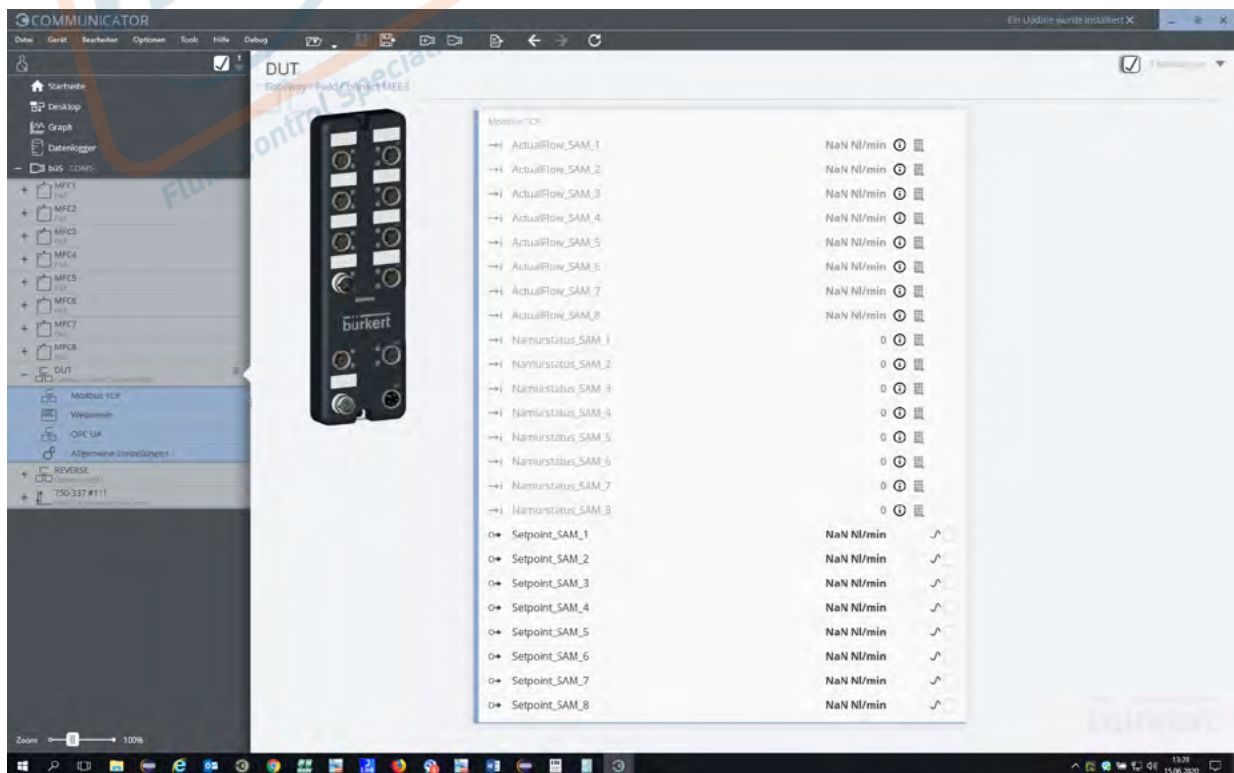

Visit product website ►

9 | 14



บริษัท ฟลูเทค จำกัด  
FLU-TECH CO.,LTD


845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270  
845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND  
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th

## 6. Networking and combination with other Bürkert products

### 6.1. Example for Type ME63

#### Note:

- Lengths of stub lines should not be longer than 5 m.
- Signal integrity measurement is recommended for star cabling of more extensive networks.
- See also [cabling guide](#) ▶

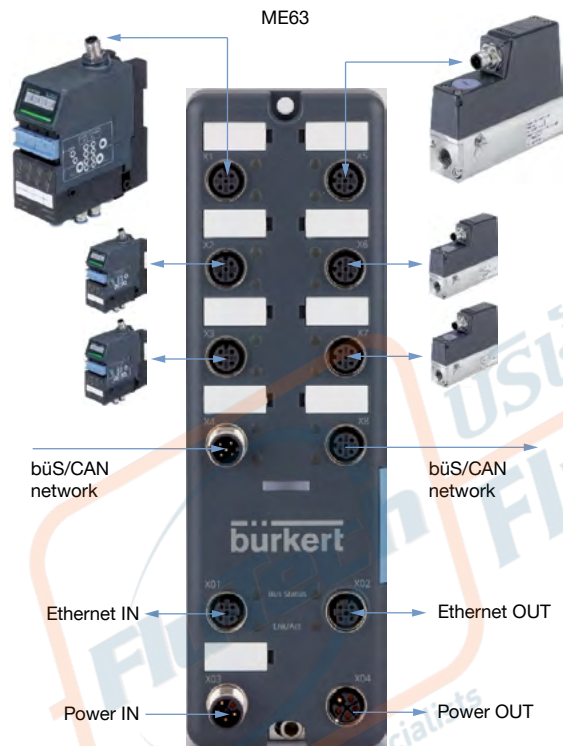

#### Short description of the illustrated example:

- Connection of 6 Bürkert devices via spur line to X1-X3, X5-X7
- Integration in bus/CANopen network via X4 and X8
- All bus devices can be reached via the Ethernet connection
- Additional devices can be integrated into the Ethernet communication via the second Ethernet port X02.
- Further devices can be supplied via the second power port X04
- A total of up to 126 bus/CANopen devices can be connected to one gateway.

6.2. Example for Gateway Module Type ME63 in combination with a passive junction box



Short description of the illustrated example:

- Connection of 6 Bürkert devices via spur line to X1-X3, X5-X7 of the gateway module (left)
- Integration in būs network via X4 and X8
- The passive distributor (right) connects another 8 devices via spur lines.
- All būs devices can be reached via the Ethernet connection of the gateway module (left).
- Altogether up to 126 būs/CANopen devices can be connected to one gateway.

DTS 1000438645 EN Version: E Status: RL (released | freigegeben | validé) printed: 19.01.2022

## 7. Ordering information

### 7.1. Bürkert eShop – Easy ordering and quick delivery



#### Bürkert eShop – Easy ordering and fast delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

### 7.2. Bürkert product filter



#### Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

### 7.3. Ordering chart

#### Note:

Please note that the ME63 gateway modules are not configured at the factory. However, they must be configured to enable their use in a system. The device description files for the required protocols must be generated with the communicator software before commissioning a system. You can find further details in the **Operating manual for ME63** ▶.

Article	Article no.
Gateway Industrial Ethernet ME63	346845 ☒
Passive junction box	346873 ☒

## 7.4. Ordering chart accessories

Article	Article no.
büS cable extension, M12, 0.1 m	772492
büS cable extension, M12, 0.2 m	772402
büS cable extension, M12, 0.5 m	772403
büS cable extension, M12, 1 m	772404
büS cable extension, M12, 3 m	772405
M12 socket, straight (A-coded) <sup>1.)</sup>	772416
M12 plug, straight (A-coded) <sup>1.)</sup>	772417
M12 socket, angled (A coded) <sup>1.)</sup>	772418
M12 plug, angled (A-coded) <sup>1.)</sup>	772419
Y distributor	772420
Y distributor for connecting two separately powered segments of a büS network	772421
Terminating resistor, 120 Ohm, M12 plug	772424
Terminating resistor, 120 Ohm, M12 socket	772425
Power supply unit Type 1573 for DIN rail, 100...240 V AC/24 V DC, 1.25 A, NEC Class 2 (UL 1310)	772438
Power supply unit Type 1573 for DIN rail, 100...240 V AC/24 V DC, 1 A, NEC Class 2 (UL 1310)	772361
Power supply unit Type 1573 for DIN rail, 100...240 V AC/24 V DC, 2 A, NEC Class 2 (UL 1310)	772362
Power supply unit Type 1573 for DIN rail, 100...240 V AC/24 V DC, 3.8 A, NEC Class 2 (UL 1310)	772898
Power supply unit Type 1573 for DIN rail, 100...240 V AC/24 V DC, 10 A	772698
Micro SD card	774087
büS-Stick Set 1 (incl. cable (M12), stick with integrated terminating resistor, power supply and software)	772426
büS-Stick Set 2 (incl. cable (M12)), stick with integrated terminating resistor	772551
Software Bürkert Communicator	<a href="#">Link ▶</a>
<b>Industrial Ethernet connection cable (RJ45 to M12 plug, D-coded)</b>	
Industrial Ethernet cable, 1 m	775050
Industrial Ethernet cable, 2 m	775051
Industrial Ethernet cable, 3 m	775052
Industrial Ethernet cable, 5 m	775053
Industrial Ethernet cable, 10 m	775054
Industrial Ethernet cable, 15 m	775055
Industrial Ethernet cable, 20 m	775056
<b>Industrial Ethernet connection cable (RJ45 to M12 plug, D-coded, angled)</b>	
Industrial Ethernet cable, 0,5 m	774826
Industrial Ethernet cable, 1 m	774827
Industrial Ethernet cable, 2 m	774830

1.) For space reasons, the individual M12 connectors may not be suitable for simultaneous use on the same side of a Y distributor. In this case, please use a commercially available moulded cable.