

MINIATURE Coalescing Filters

FCD50 Models Port Sizes: 1/8, 1/4



Model Shown: FCD50-2

SPECIFICATIONS

Ambient/Media Temperature:

Plastic bowl: 40° to 125°F (4° to 52°C).
Metal bowl: 40° to 150°F (4° to 66°C).

Body: Aluminum.

Bowl: 2-Ounce (60-ml) capacity polycarbonate plastic;
optional aluminum bowl.

Bowl Drain:

Internal automatic drain; optional manual drain.

Filter Element: 0.3- μ m-rated borosilicate-glass-fiber
coalescing element; optional 0.01- μ m-rated element.

Fluid Media: Compressed air.

Inlet Pressure:



15 psig (1 bar) minimum with automatic drain.
Plastic bowl: 150 psig (10 bar) maximum.
Metal bowl: 200 psig (14 bar) maximum.

Seals: Nitrile.

APPLICATION NOTE: A general purpose filter must
be installed ahead of a coalescing filter to ensure good
performance and to extend the life of the coalescing element.

- ◆ Inline mounting.
- ◆ 0.3- μ m-rated coalescing filter element; optional 0.01- μ m-rated element.
- ◆ High-strength polycarbonate plastic filter bowl; optional metal bowl.
- ◆ Internal automatic drain; optional manual drain.
- ◆ NPTF port threads; optional BSPP threads.

FLOW CHARTS

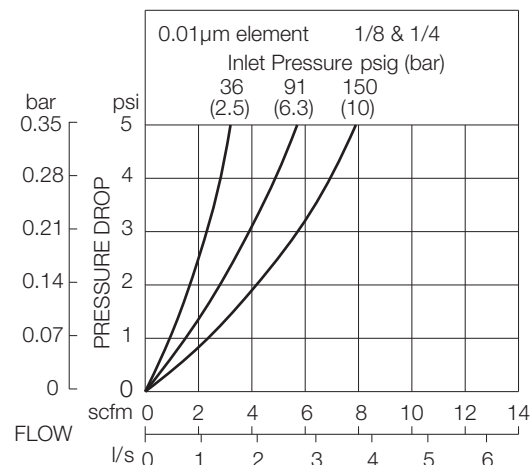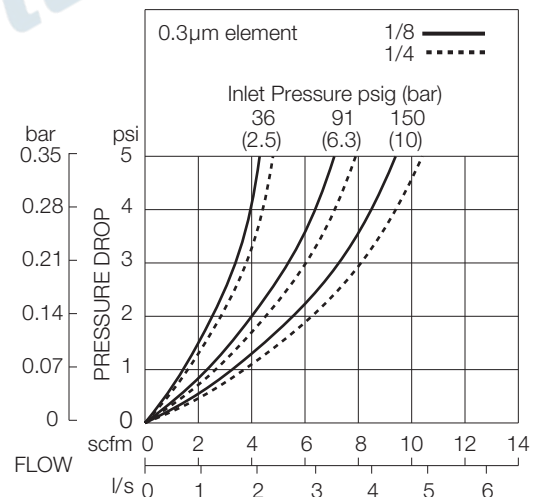



บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270

845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th

DIMENSIONS inches (mm)

Bowl	Ports	A	B	C	Depth	Weight lb (kg)
Plastic	1/8, 1/4	1.6 (41)	3.9 (99)	0.4 (9.5)	1.6 (41)	0.33 (0.15)
Metal	1/8, 1/4	1.6 (41)	4.3 (109)	0.4 (9.5)	1.6 (41)	0.35 (0.16)

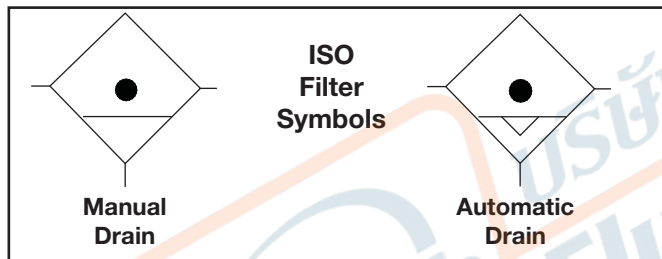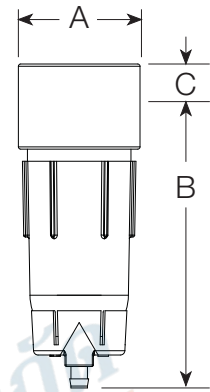

REPLACEMENT FILTER ELEMENT KITS

Element Rating	Kit Number
0.3 μm (Std element)	A10F-16
0.01 μm For models with E8 option	A10F-16E8

ORDERING INFORMATION

Change the letters in the sample model number below to specify the filter you want.

B FCD 50 - 2 Y W

<p>BOWL TYPE</p> <p>Plastic bowl Leave blank Metal bowl B</p> <p>BOWL DRAIN</p> <p>Internal automatic drain FCD Manual drain FC</p>	<p>PORT TYPE</p> <p>NPTF threads Leave Blank BSPP threads W</p> <p>OPTIONS: (More than one option can be chosen. Add in alphabetical order)</p> <p>None Leave Blank 0.01-μm-rated coalescing E8 element Tapped modified head to T to allow 50-01 bracket assy. No Drain (Lubricator bowl) LDC (Use manual drain option under BOWL DRAIN section as well)</p> <p>PORT SIZE</p> <p>1/8 NPTF 1 1/4 NPTF 2</p>
---	--



บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270
845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th