

SENTRY Modular Lubricators

L10 Models Port Sizes: 1/8, 1/4; Tube Fittings



Model Shown: L10-2

- ◆ Modular assembly and mounting.
- ◆ Threaded ports or quick-connect fittings for tubing up to 10 mm in diameter.
- ◆ Wick-feed design.
- ◆ **NPTF** port threads; optional **BSPP** threads.

SPECIFICATIONS

Ambient/Media Temperature:

40° to 125°F (4° to 52°C).

Body: Acetal.

Bowl: 2-Ounce (60-ml) capacity polycarbonate plastic; optional aluminum bowl.

Fluid Media: Compressed air.


Inlet Pressure: 150 psig (10 bar) maximum.

Oil Adjustment: External, no shutoff.

Seals: Nitrile.

FLOW CHART

Inlet Pressure: 100 psig (7 bar)

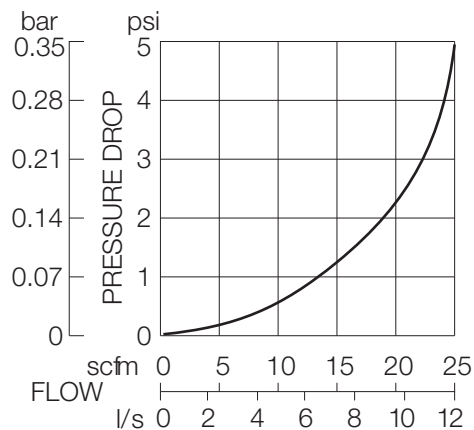

Minimum Flow: 1 scfm (0.47 l/s)




บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD


845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270
845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th

DIMENSIONS inches (mm)

Ports	A	B †	C	Depth	Weight lb (kg)
No Port	1.7 (43)	3.6 (91)	0.9 (22)	1.8 (45)	0.17 (0.08)
1/8, 1/4	3.0 (76)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
Models below have quick-connect fittings for tubing.					
1/4	3.4 (86)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
3/8	3.9 (99)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
4 mm	3.4 (86)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
6 mm	3.4 (86)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
8 mm	3.4 (86)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
10 mm	3.9 (99)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)



† Dimension is for plastic bowl; metal bowl is 3.8 (97).

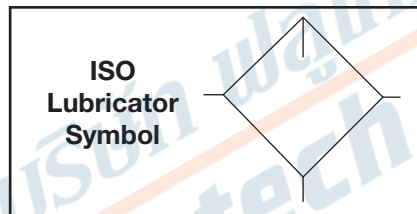

ORDERING INFORMATION

Change the letters in the sample model number below to specify the lubricator you want.

L10 P - 2 X Y W

<p>BOWL TYPE</p> <p>Plastic L10</p> <p>Metal..... BL10</p> <p>MOUNTING HOLE LOCATION</p> <p>Bottom mount (Standard) Leave Blank</p> <p>Top mountP</p> <p>INLET PORT SIZE</p> <p>No Inlet and Outlet Ports. Leave blank</p> <p>Threaded:</p> <p>1/8 NPTF 1</p> <p>1/4 NPTF 2</p> <p>Fittings for Tubing:</p> <p>1/4 04</p> <p>3/8 06</p> <p>4 mm M4</p> <p>6 mm M6</p> <p>8 mm M8</p> <p>10 mm M10</p>	<p style="font-size: 24pt; font-weight: bold;">-</p>	<p>PORT TYPE</p> <p>As specified in INLET PORT ...Leave Blank</p> <p>BSPP threads on both ports ...W</p> <p>OPTIONS</p> <p>None Leave Blank</p> <p>Quick-fill Q-cap..... Q</p> <p>OUTLET PORT SIZE</p> <p>Same as inlet port Leave Blank</p> <p>Threaded:</p> <p>1/8 NPTF 1</p> <p>1/4 NPTF 2</p> <p>Fittings for Tubing:</p> <p>1/404</p> <p>3/806</p> <p>4 mmM4</p> <p>6 mmM6</p> <p>8 mmM8</p> <p>10 mmM10</p>
---	--	---



บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270
845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th