# **SERV-OIL Reservoirs**Transparent container



Model Shown: M570-6R

Model Shown: M570-12R

Servo-Meters can be supplied with oil by pressure systems (up to 30 psig) or gravity systems, although gravity systems are generally preferred. Remote reservoirs should be connected to the bottom port of the SERV-OIL equipment with a minimum 5/16" I.D. line.

Stand-pipes should be installed from the top of the equipment and extend above the reservoir for gravity systems to prevent airlock of the Servo-Meters.

# M570R Models Port Sizes: 1/4


Sight domes are available to vent air from the system, and to confirm visually the presence of oil. Presure-fill systems should be vented, or use low velocity recirculation of the oil supply.

M570R transparent reservoirs are available in, 1-quart (960-ml), and 2-quart (1920-ml) capacities.

**Level Switches.** When the reservoir is located where the oil level cannot easily be determined visually, electrical oil level switches can be used. Both low-level and high-level switches are available. The switches can be connected to a remote electrical control for automatic filling.

#### **NOTE**

For most applications Master Pneumatic recommends a light spindle oil that is not chemically aggressive. (150-1200 ssu viscosity).




#### RESERVOIR DIMENSIONS

idists		Dimensions inches (mm)			
Part No.	Capacity	Α	В	С	Depth
M570-6R M570-12R	1 quart 2 quarts	7.6 (193) 13.6 (345)	5.4 (137) 5.4 (137)	4.6 (117) 4.6 (117)	4.8 (122) 4.8 (122)

### **ORDERING INFORMATION**

Change the letters in the sample model number below to specify the reservoir you want.

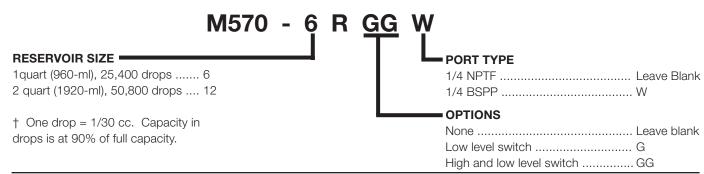



845/3-4 หมู่ 3 ก.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270