



บริษัท ฟลูเทค จำกัด  
**Flu-tech co.,ltd**  
Authorized Distributor

# CLUTCH/BRAKE CONTROL SERPAR<sup>®</sup> L-G MONITORED DOUBLE VALVES

## PRODUCT CATALOG



บริษัท ฟลูเทค จำกัด  
FLU - TECH CO., TD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 102070  
845/3-4 Thepaharak RD., T. Thepharak, A. Muang, Samutprakan 10270 THAILAND  
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th

# SERPAR® Double Valves with L-G Monitor 35 Series

## Product Overview



### Clutch/Brake Control Function

The SERPAR® L-G double valve is designed to provide control of clutch/brake mechanisms on mechanical stamping presses as well as other safety applications, such as alternative lockout systems for energy isolation.

Valve Body Size	Solenoid Wiring	Simplified Schematic
4		
8, 12, 30		

The SERPAR® Series valves are internally monitored double valves with a built-in monitoring device that checks for the proper operation of each valve element. If the internal monitor detects a valve fault on a particular cycle, the double valve will fail to a safe condition (all downstream air is exhausted) and the monitor will lock-out to inhibit further operation of the device. Normal operation can only be resumed by a momentary reset signal to the valve.

## VALVE FEATURES

<b>Monitoring</b>	Internal, Pneumatic (L-G) monitoring; requires no additional monitoring circuitry
<b>Poppet Design</b>	Dirt tolerant, wear compensating for quick response and high flow capacity
<b>PTFE Backup Piston Rings</b>	Enhances valve endurance enabling operation with or without in-line lubrication
<b>Automatic Lock-out</b>	Automatic lock-out/inhibit upon detection of a malfunction
<b>Fault Detection</b>	Default to de-energized position upon fault detection
<b>Valve Reset</b>	Pneumatic reset, with a momentary external pneumatic signal
<b>Mounting</b>	In-line, with piping flanges
<b>Overrides</b>	Basic Size 4 – Manual, flush button Basic Size 8, 12, 30 – Manual, rubber grommet
<b>SISTEMA Library</b>	Available for download at <a href="http://rosscontrols.com">rosscontrols.com</a>

## STANDARD SPECIFICATIONS

<b>GENERAL</b>	<b>Function</b>		3/2 Valve		
	<b>Construction Design</b>		Dual Poppet		
	<b>Actuation</b>		Electrical – Solenoid Pilot Controlled		
	<b>Mounting</b>	<b>Type</b>	In-line		
		<b>Orientation</b>	Preferably vertically (with pilot solenoids on top)		
	<b>Connection</b>		Threaded; G, NPT		
	<b>Monitoring</b>		Internal; L-G monitor		
<b>Minimum Operation Frequency</b>		Once per month, to ensure proper function			
<b>OPERATING CONDITIONS</b>	<b>Temperature</b>	<b>Ambient</b>	40° to 120°F (4° to 50°C)		
		<b>Media</b>	40° to 175°F (4° to 80°C)		
	<b>Flow Media</b>		Filtered air		
	<b>Operating Pressure</b>	<b>Valve Basic Size</b>	4	30 to 100 psig (2.1 to 7 bar)	
			8, 12, 30	30 to 125 psig (2.1 to 8.5 bar)	
	<b>Reset Pressure</b>	<b>Remote</b>	<b>Valve Basic Size</b>	4	Require a pressure of minimum 30 psig (2 bar)
8, 12, 30				Require a pressure of minimum 60 psig (4 bar)	
<b>Manual</b>		Valve Basic Size 4 Only		Use internal valve pressure	
<b>ELECTRICAL DATA</b>	<b>Solenoids</b>		According to VDE 0580. Two solenoids, rated for continuous duty		
	<b>Operating Voltage</b>		24 volts DC; 110-120 volts AC, 50/60 Hz; 230 volts AC, 50/60 Hz		
	<b>Power Consumption</b>	<b>Valve Basic Size</b>	4	11 watts on DC; 30 VA inrush, 16 VA holding on 50 or 60 Hz	
			8, 12, 30	14 watts on DC; 87 VA inrush, 30 VA holding on 50 or 60 Hz	
	<b>Enclosure Rating</b>		IP65, IEC 60529		
<b>Electrical Connection</b>	<b>Valve Basic Size</b>	4	EN 175301-803 Form A, uses two cord-grip connectors at solenoids		
		8, 12, 30	Uses terminal strip connectors		
<b>CONSTRUCTION MATERIAL</b>	<b>Valve Body</b>		Cast Aluminum		
	<b>Poppet</b>		Acetal and Stainless Steel		
	<b>Seals</b>		Buna-N		

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

## PRODUCT CREDENTIALS

Safety Category	CSA Certificate of Compliance	CE Conformity Declaration	EAC Conformity Declaration	ISO Standard
				ISO 13849-1:2015

# Ordering Information

## MODEL NUMBER CONFIGURATOR

## 3-Way 2-Position Valves

### VALVE BASIC SIZE 4

<b>Thread</b>	<b>Series</b>	<b>Revision Level</b>	<b>Type/Function</b>	<b>Inlet Orientation</b>	<b>Monitor Reset</b>	<b>Voltage*</b>
G      D	35    73    D    319		3/2-Way Solenoid	Right	Manual    1 Remote    2	24 volts DC      W
NPT    Leave Blank			<b>Port Size – Flanged Ports</b>	Left	Manual    5 Remote    6	110-120 volts AC, 50/60 Hz      Z
			<b>Basic Size</b>			230 volts AC, 50/60 Hz**      Y
			4			*For other voltages consult ROSS.
			3/8			**230 V AC not available in the U.S.
			1/2			(OSHA regulations limit press control voltage to no more than 120 volts AC).
			3/4			


Valve Basic Size	Inlet Port Size	Flow Cv		Avg. Response Constants			Weight lb (Kg)
		1-2	2-3	M	F		
					1-2	2-3	
4	3/8	3	6	15	0.70	0.40	8.4 (3.8)
	1/2	3	8	15	0.65	0.35	
	3/4	3	9	15	0.65	0.35	

<b>Valve Response Time</b>	<p>The constants above, designated M and F, can be used to determine the amount of time required to fill or exhaust a volume of any size using the formula on the right.</p>	<p><b>Vlv. Resp. Time (msec) = M + F * V</b>  <b>M</b> = avg. time for parts movement  <b>F</b> = msec. per cubic inch of volume  <b>V</b> = volume in cubic inches</p>
----------------------------	--	---

<b>RESET VALVES for L-G MONITOR</b>	<p>On valve models with manual reset a button on the side of the monitor is pushed to perform the reset function.</p> <p>Valves with remote reset option require a small 3/2 reset valve and the installation of a 1/8 inch air line from the reset valve to the reset port of the double valve. ROSS offers 3/2 normally closed valves with either manual or electric control that are suitable for this purpose.</p>
-------------------------------------	--

## MODEL NUMBER CONFIGURATOR 3-Way 2-Position Valves

VALVE BASIC SIZE 8, 12, 30

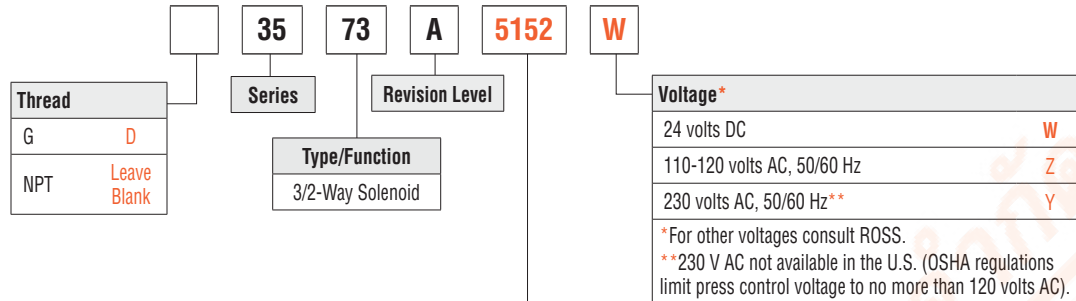

Port Size – Flanged Ports				Port Size – Flanged Ports			
Overrides	Basic Size	Port Size #		Overrides	Basic Size	Port Size #	
With Manual Overrides	8	1/2	4142	Without Overrides	8	1/2	4162
		3/4	5142			3/4	5162
	12	3/4	5152		12	3/4	5172
	8	1	6152		8	1	6172
		12	1			6182	12
	30	1-1/4	7162		30	1-1/4	7182
1-1/4		7152	1-1/4	7172			
		1-1/2	8162			1-1/2	8182

# 2 inch Port Size available on Basic Size 30 valves. Order model number 1999H77 flange kit separately.


Valve Basic Size	Inlet Port Size	Flow Cv		Avg. Response Constants			Weight lb (Kg)
				M	F		
		1-2	2-3		1-2	2-3	
8	1/2	3.5	8.5	15	0.70	0.30	15.3 (6.9)
	3/4	4.0	12	15	0.65	0.23	
12	3/4	8.0	15	15	0.65	0.23	19.0 (8.6)
8	1	4.0	12	20	0.33	0.21	15.3 (6.9)
12	1	8.5	19	20	0.28	0.21	19.0 (8.6)
	1-1/4	9.0	21	20	0.28	0.21	
30	1-1/4	20	42	25	0.19	0.07	37.5 (16.9)
	1-1/2	21	43	25	0.18	0.07	

### Valve Response Time

The constants above, designated M and F, can be used to determine the amount of time required to fill or exhaust a volume of any size using the formula on the right:


**Vlv. Resp. Time (msec) = M + F \* V**  
**M** = avg. time for parts movement  
**F** = msec. per cubic inch of volume  
**V** = volume in cubic inches

# Valve Operation

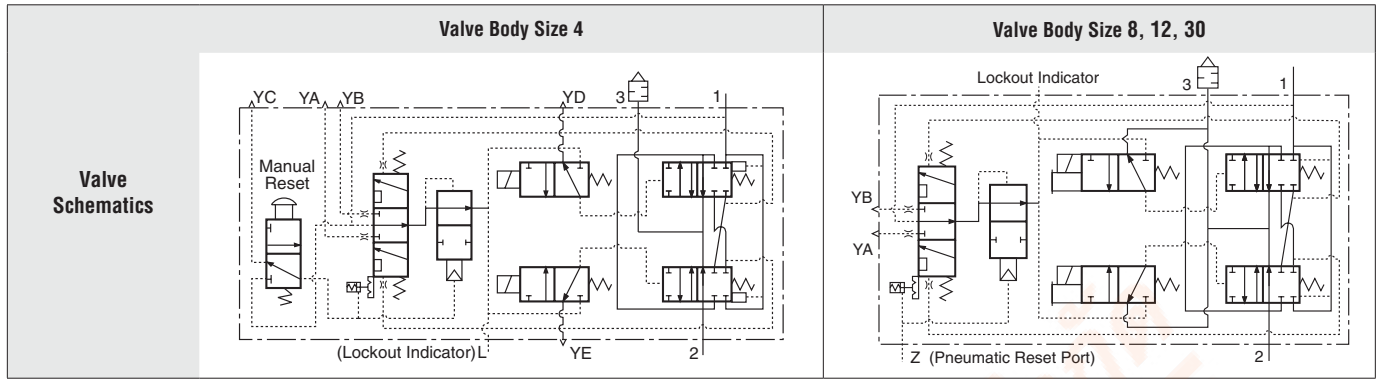


## Conditions at Start

Inlet 1 is closed to outlet 2 by both valve elements A and B. Outlet 2 is open to exhaust 3. Pilot air is ported from inlet 1 and through the center section of spool S to the normally closed pilots Pa and Pb. Monitoring pressure signals at both ends of spool S are exhausted.




## Normal Operation

Simultaneously energizing both solenoids actuates both pilots and causes valve elements A and B to shift. Inlet 1 is then connected to outlet 2 via crossflow passages C and D. Exhaust 3 is closed. Monitoring pressure signals go to each end of spool S and become equal to inlet pressure.




## Detecting a Malfunction

A malfunction in the system or the valve itself could cause one valve element to be open and the other closed. Air then flows past the inlet poppet on valve element A, into crossflow passage D, but is substantially blocked by the spool portion of element B. The large size of the open exhaust passage past element B keeps the pressure at the outlet port below two percent of inlet pressure. Full monitoring air pressure from side A goes to the right end of spool S, and a reduced pressure goes to the left end. This pressure imbalance causes the spool to shift to the left. This shuts off and exhausts pilot air to both solenoid pilots, and allows valve element A to return to the closed position.



## L-G Monitor Locked-out

When the L-G spool shifts it is held by a lockout pin (not shown). Pilot air is then exhausted to atmosphere via port YB, and pilot supply air is diverted to atmosphere via port YA. The lockout mechanism must be reset before the valve can return to normal operation. During and following reset, the pilot solenoids must be kept de-energized to prevent inadvertent and possibly dangerous cycling of the press. The reset function is either manual or remote-pneumatic depending on valve model.




Both solenoids must be energized simultaneously to shift the valve; maintained signal required to keep valve shifted.

**WARNING:** If monitor must be reset, electrical signals to both solenoids must be removed to prevent the machine controlled by the valve from immediately recycling and producing a potentially hazardous condition.


## DIMENSIONS

Inches (mm)


**Basic Size 4**

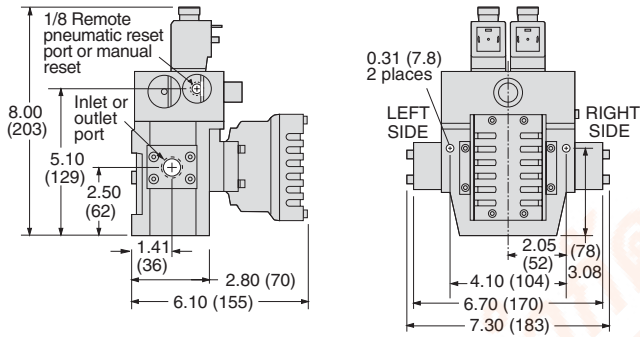


**Basic Size 8**

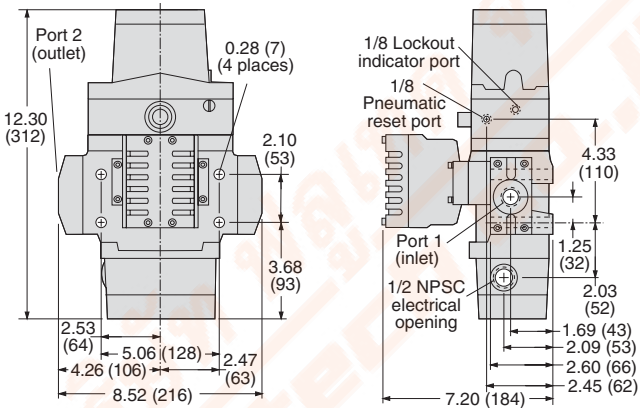

**Basic Size 12**

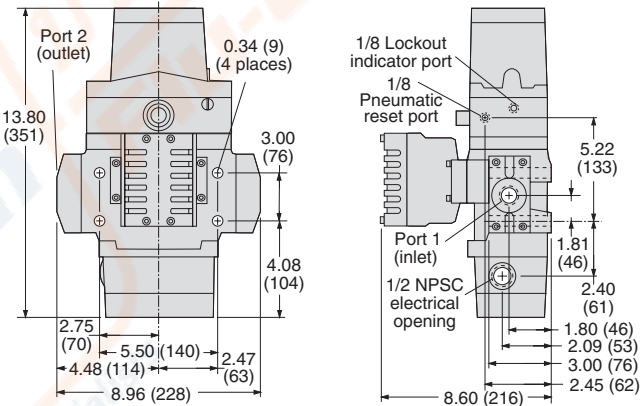

**Basic Size 30**

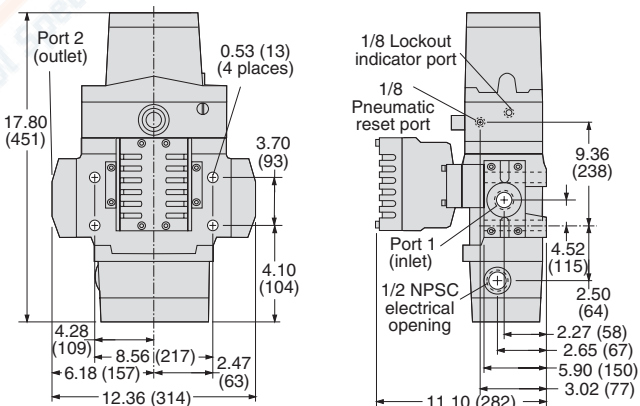

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D and 3D CAD models in a wide range of formats at [www.rosscontrols.com](http://www.rosscontrols.com).

# Accessories

## ELECTRICAL STATUS INDICATION

Pressure Switch (Electrical Lockout Indicator)	Installation Location	Indicator Type	Connector Type	Model Number	Port Thread	Factory Preset psi (bar)
	Pressure Sensing Port	Mechanical Pressure Switch	EN 175301-803 Form A	586A86	1/8 NPT	5 (0.3) falling

## ENERGY RELEASE VERIFICATION

Redundant Pressure Switch Assembly	Installation Location	Indicator Type	Connector Type	Model Number	Port Size	Factory Preset psi (bar)
	In-line Downstream	Mechanical Pressure Switch	EN 175301-803 Form A	RC026-13	3/8 NPT	5 (0.3) falling

### Mechanical Pressure Switch Connectors Pinout

DIN EN 175301-803 Form A



1 - Common  
2 - Normally Closed  
3 - Normally Open  
G - Ground


## ELECTRICAL CONNECTORS

Pre-wired Connectors  For Basic Size 4	Connection Type	Connector Type	End 1	End 2	Length meters (feet)	Cord Diameter	Kit Number				Quantity
							Without Light	Lighted Connector			
								24 V DC	120 V AC	230 V AC	
Solenoid	EN 175301-803 Form A	Connector	Flying leads	2 (6.5)	6-mm	721K77	720K77-W	720K77-Z	720K77-Y	1	
						10-mm	371K77	383K77-W	383K77-Z	383K77-Y	1

Connectors (no cable)  For Basic Size 4	Connection Type	Connector Type	Fitting Connection	Kit Number				Quantity
				Without Light	Lighted Connector			
					24 V DC	120 V AC	230 V AC	
Solenoid	EN 175301-803 Form A	Cable grip	937K87	936K87-W	936K87-Z	936K87-Y	1	
			1/2" NPT conduit	723K77	724K77-W	724K77-Z	724K77-Y	1

### Solenoid Connectors Pinout

DIN EN 175301-803 Form A



1 - Black  
2 - Black  
G - Green/Yellow (Ground)



## REPLACEMENT VALVES

Valve without Piping Flanges For Basic Size 4	Port Size	Valve Basic Size	Monitor Reset	Voltage	Valve Model Number*			
					Right Inlet		Left Inlet	
					G Thread	NPT Thread	G Thread	NPT Thread
3/8, 1/2, 3/4	4	Manual	24 V DC	D3573D4241W	3573D4241W	D3573D4245W	3573D4245W	
			120 V DC	D3573D4241Z	3573D4241Z	D3573D4245Z	3573D4245Z	
			230 V DC	D3573D4241Y	3573D4241Y	D3573D4245Y	3573D4245Y	
		Remote	24 V DC	D3573D4242W	3573D4242W	D3573D4246W	3573D4246W	
			120 V DC	D3573D4242Z	3573D4242Z	D3573D4246Z	3573D4246Z	
			230 V DC	D3573D4242Y	3573D4242Y	D3573D4246Y	3573D4246Y	

\* For other voltages consult ROSS.

Valve without Piping Flanges For Basic Size 8, 12, 30	Port Size	Valve Basic Size	Voltage	Valve Model Number*			
				Right Inlet		Left Inlet	
				G Thread	NPT Thread	G Thread	NPT Thread
1/2, 3/4, 1	8	24 V DC	D3573A4202W	3573A4202W	D3573A4222W	3573A4222W	
		120 V DC	D3573A4202Z	3573A4202Z	D3573A4222Z	3573A4222Z	
		230 V DC	D3573A4202Y	3573A4202Y	D3573A4222Y	3573A4222Y	
3/4, 1, 1-1/4	12	24 V DC	D3573A4202W	3573A4202W	D3573A4222W	3573A4222W	
		120 V DC	D3573A4202Z	3573A4202Z	D3573A4222Z	3573A4222Z	
		230 V DC	D3573A4202Y	3573A4202Y	D3573A4222Y	3573A4222Y	
1-1/4, 1-1/2	30	24 V DC	D3573A4202W	3573A4202W	D3573A4222W	3573A4222W	
		120 V DC	D3573A4202Z	3573A4202Z	D3573A4222Z	3573A4222Z	
		230 V DC	D3573A4202Y	3573A4202Y	D3573A4222Y	3573A4222Y	

\* For other voltages consult ROSS.

## CONNECTION PIPING KITS





Valve Piping Flange Kits	Port Size	Valve Basic Size	Kit Number*		Flange Quantity
			G Thread	NPT	
	3/8	4	D658K77	658K77	2
	1/2	4	D659K77	659K77	2
		8	D661K77	661K77	2
	3/4	4	D660K77	660K77	2
		8	D662K77	662K77	2
		12	D664K77	664K77	2
	1	8	D663K77	663K77	2
		12	D665K77	665K77	2
	1-1/4	12	D666K77	666K77	2
		30	D667K77	667K77	2
	1-1/2	30	D668K77	668K77	2

\*Kits include all required seals and mounting bolts.

# Options

## RESET VALVES FOR DOUBLE VALVES WITH REMOTE RESET

Valves with the remote reset option require a small 3/2 reset valve and the installation of a 1/8 inch air line from the reset valve to the reset port of the double valve. ROSS offers 3/2 normally closed valves with either manual or electric control that are suitable for this purpose.

Compact Valves for Line Mounting	Miniature Valve for Base Mounting	Manual Palm Button Valves	Mushroom Valves
			

### Direct Solenoid Pilot Control – Compact Valves for Line Mounting

Valve Type	Port Size	Valve Model Number*						Flow $C_v$	Average Response Constants**	
		BSPP (G) Thread			NPT Thread				M	F
		24 V DC	110-120 V AC 50/60 Hz	230 V AC 50/60 Hz	24 V DC	110-120 V AC 50/60 Hz	230 V AC 50/60 Hz			
Normally-Closed	1/8	D1613B1020W	D1613B1020Z	D1613B1020Y	1613B1020W	1613B1020Z	1613B1020Y	0.3	5	2.90

\* For other voltages, consult ROSS.

<b>**Valve Response Time</b>	The constants above, designated M and F, can be used to determine the amount of time required to fill or exhaust a volume of any size using the formula on the right:	<b>Vlv. Resp. Time (msec) = M + F *V</b> <b>M</b> = avg. time for parts movement <b>F</b> = msec. per cubic inch of volume <b>V</b> = volume in cubic inches
------------------------------	---	---

### Direct Solenoid Pilot Control – Miniature Valve for Base Mounting

Valve Type	Override Type	Valve Model Number*			Flow $C_v$
		24 V DC	110-120 V AC 50/60 Hz	230 V AC 50/60 Hz	
Normally-Closed	Non-Locking	W1413A1409W	W1413A1409Z	W1413A1409Y	0.1

\* For other voltages, consult ROSS.

Sub-Base for Direct Solenoid Control Valves	Sub-Base Model Number	
	BSPP (G) Thread	NPT Thread
	D516B91	516B91

### Manual Palm Button Valves

Valve Operator Type	Port Size	Button Color	Valve Model Number		Flow $C_v$
			BSPP (G) Thread	NPT Thread	
Heavy Duty Palm Button	1/4	Green	D1223B2001	1223B2001	0.8
		Red	D1223B2003	1223B2003	
Flush Pushbutton	1/4	Green	D1223B2FPG	1223B2FPG	0.9
		Red	D1223B2FPR	1223B2FPR	
Mushroom Button	1/4	Green	D1223B2MBG	1223B2MBG	
		Red	D1223B2MBR	1223B2MBR	