



DIRECTIONAL CONTROL ANSI VALVES W70 & W74 SERIES

PRODUCT CATALOG



ANSI Valves W70 Series

Product Overview

The ROSS® ANSI valves W70 Series are base mounted spool and sleeve valves that conform to the American National Standards Institute (ANSI) standards for valve-to-base interface configurations, including plug-and-socket electrical connections between valve and base.

These ANSI Size 1, 2.5, 4, 10, and 20 valves are available as, 2- and 3-position, 5-ported 4-way solenoid pilot or pressure controlled valves with either internal or external pilot supply. The spool and sleeve design means there are no seals to wear out.



Illustration examples.

VALVE FEATURES

Spool Design Spool and Sleeve construction for high dirt tolerance

Mounting Options Individual sub-base or manifold base mounting

Pilot Supply Internal or external; suitable for vacuum service (with external pilot supply)

Pilot Operation Provides high shifting force with low power consumption

Actuation	ANSI Size	Available Inlet Port Sizes							Functions									Maximum Flow C _v	Page			
		1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	5/2		5/3			5/2		5/3						
									Single	Double	Power Center	Closed Center	Open Center	Direct	Double Direct							
Solenoid Control	1	●	●						●	●	●	●	●	●	●	●	●	●	●	●	1.0	4 – 15
	2.5		●	●					●	●	●	●	●	●	●	●			●	●	2.5	
	4			●	●				●	●	●	●	●	●	●				●	●	4.2	
	10				●	●	●		●	●	●	●	●								10.0	
	20						●	●	●	●	●	●	●								22.0	
Pressure Control	1	●	●						●	●	●	●	●					—			1.0	16 – 21
	2.5		●	●					●	●		●	●					—			2.5	
	4			●	●				●	●		●	●					—			4.2	
	10				●	●	●		●	●		●	●					—			10.0	
	20						●	●	●	●		●	●					—			22.0	
Sub-Bases																					32 – 39	
Manifold Bases																					40 – 41	
Accessories and Options																					44	

STANDARD SPECIFICATIONS

GENERAL	Function	5/2 and 5/3 Valve
	Construction Design	Spool and Sleeve
	Actuation	Electrical – Solenoid Pilot Controlled Pneumatic – Pressure Controlled
	Mounting	Sub-Base or Manifold
	Connection	Threaded; G, NPT
	Manual Override	Flush; rubber, non-locking

OPERATING CONDITIONS	Temperature	Solenoid Pilot Controlled	Ambient	40° to 120°F (4° to 50°C)
			Media	40° to 175°F (4° to 80°C)
		Pressure Controlled	Ambient	40° to 175°F (4° to 80°C)
			Media	
	Flow Media	Filtered air		
	Operating Pressure	Vacuum to 150 psig (Vacuum to 10 bar)		
	Pilot Supply Pressure	ANSI Size 1 & 20	Minimum 30 psig (2 bar)	
		ANSI Size 2.5, 4, 10	Minimum 15 psig (1 bar)	
External Pilot Supply	Must be equal to or greater than inlet pressure			

ELECTRICAL DATA FOR SOLENOID PILOT	Solenoids		Rated for continuous duty	
	Operating Voltage (each solenoid)	Solenoid Pilot Controlled	24 volts DC 100-110 volts AC, 50 Hz, 100-130 volts AC 60 Hz 230-240 volts AC, 60 Hz	
		Direct Solenoid Pilot Controlled	24 volts DC 110-120 volts AC, 50/60 Hz 230-240 volts AC, 60 Hz	
	Power Consumption	Solenoid Pilot Controlled	ANSI Size 1	24 V DC – 5 watts 100-130 V AC – 10 VA inrush, 24 VA holding 230-240 V AC – 10 VA inrush, 24 VA holding
			ANSI Size 2.5, 4, 10, & 20	24 V DC – 14 watts 110-120 V AC – 87 VA inrush, 55 VA holding 230-240 V AC – 87 VA inrush, 55 VA holding
		Direct Solenoid Pilot Controlled	ANSI Size 1	24 V DC – 20 watts 100-130 V AC – 140 VA inrush, 30 VA holding 230-240 V AC – 140 VA inrush, 30 VA holding
			ANSI Size 2.5 & 4	24 V DC – 20 watts 110-120 V AC – 380 VA inrush, 79 VA holding 230-240 V AC – 380 VA inrush, 79 VA holding
	Indicator Light	Solenoid Pilot Controlled	ANSI Size 4, 10, & 20	One per solenoid

CONSTRUCTION MATERIAL	Valve Body	Cast Aluminum
	Spool	Stainless Steel
	Seals	Buna-N

IMPORTANT NOTE: Please read carefully and thoroughly all of the CAUTIONS, WARNINGS on the inside back cover.

PRODUCT CREDENTIALS

CSA Certificate of Compliance 	CE Conformity Declaration 	EAC Conformity Declaration 	CRN Certification Available for appropriately tested valves
---	---	--	---

Ordering Information

5/2 Single Solenoid Pilot Controlled Valves

SINGLE SOLENOID PILOT CONTROLLED VALVES

5-Way 2-Position Valves

Size		Valve Model Number*		
		Voltage		
ANSI	Port	24 V DC	110-120 V AC	230 V AC
1	1/4 – 3/8	W7076B2331W	W7076B2331Z	W7076B2331Y
2.5	3/8 – 1/2	W7076A3331W	W7076A3331Z	W7076A3331Y
4	3/8 – 3/4	W7076D4331W	W7076D4331Z	W7076D4331Y
10	3/4 – 1-1/4	W7076C6331W	W7076C6331Z	W7076C6331Y
20	1-1/4 – 1-1/2	W7076C8331W	W7076C8331Z	W7076C8331Y


For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C_v	Average Response Constants*			Weight lb (kg)
Body	Port 1		1-2	M	F	
		1-2			2-3	
1	1/4 – 3/8	1.0	20	3.6	4.9	3.0 (1.4)
2.5	3/8 – 1/2	2.5	17	1.6	2.7	3.0 (1.4)
4	3/8 – 3/4	4.2	20	0.6	0.6	5.3 (2.4)
10	3/4 – 1-1/4	10	30	0.3	0.3	7.3 (3.3)
20	1-1/4 – 1-1/2	22	50	0.1	0.2	14.5 (6.5)

Valve Response Time – Response Time (msec) = $M + (F \cdot V)$. This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Single Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

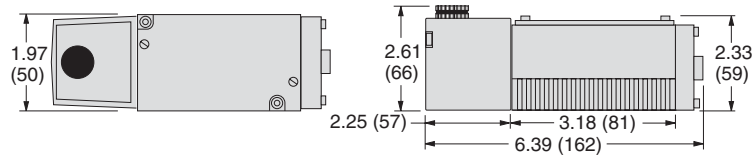


ANSI Size 2.5

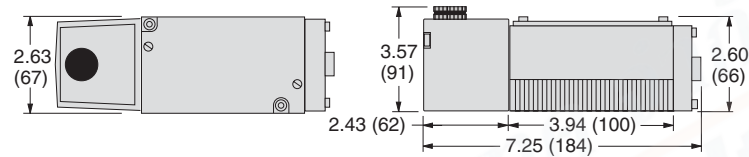


ANSI Size 4

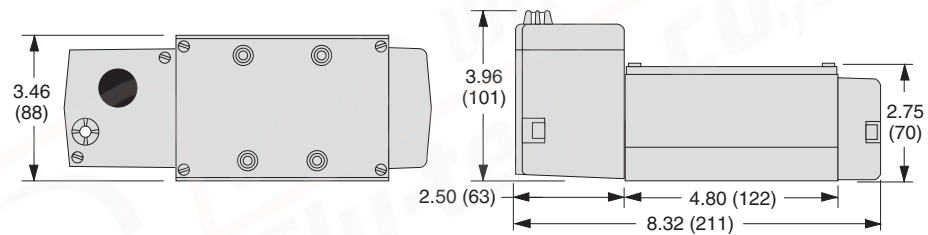

ANSI Size 10

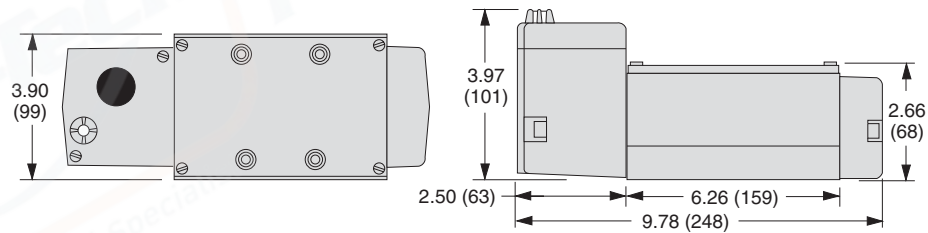

ANSI Size 20

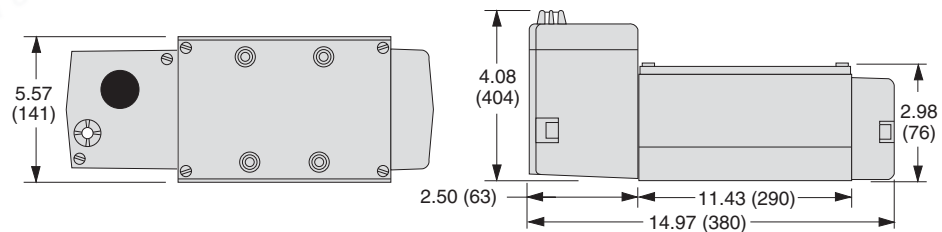

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/2 Double Solenoid Pilot Controlled Valves

DOUBLE SOLENOID PILOT CONTROLLED VALVES

5-Way 2-Position Valves

Size		Valve Model Number*		
		Voltage		
ANSI	Port	24 V DC	110-120 V AC	230 V AC
1	1/4 – 3/8	W7076B2332W	W7076B2332Z	W7076B2332Y
2.5	3/8 – 1/2	W7076A3332W	W7076A3332Z	W7076A3332Y
4	3/8 – 3/4	W7076D4332W	W7076D4332Z	W7076D4332Y
10	3/4 – 1-1/4	W7076C6332W	W7076C6332Z	W7076C6332Y
20	1-1/4 – 1-1/2	W7076C8332W	W7076C8332Z	W7076C8332Y


For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C_v	Average Response Constants*			Weight lb (kg)
Body	Port 1		1-2	M	F	
		1-2			2-3	
1	1/4 – 3/8	1.0	20	3.6	4.9	4.0 (1.8)
2.5	3/8 – 1/2	2.5	17	1.6	2.7	4.0 (1.8)
4	3/8 – 3/4	4.2	20	0.6	0.6	6.5 (2.9)
10	3/4 – 1-1/4	10	30	0.3	0.3	9.0 (4.1)
20	1-1/4 – 1-1/2	22	50	0.1	0.2	15.8 (6.8)

Valve Response Time – Response Time (msec) = $M + (F \cdot V)$. This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Double Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

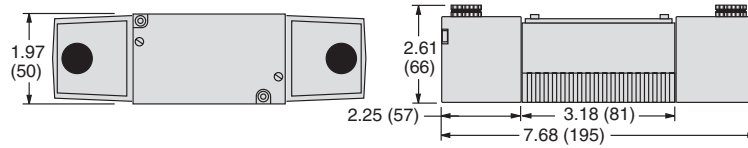


ANSI Size 2.5

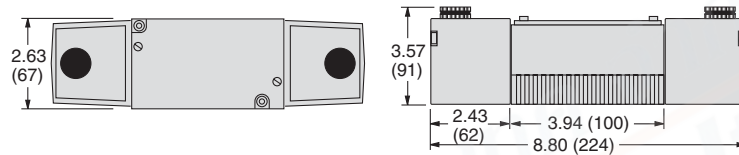


ANSI Size 4

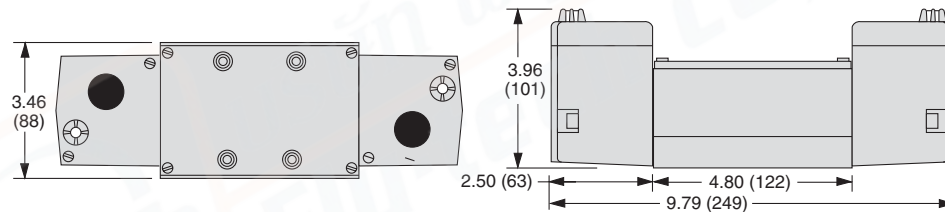

ANSI Size 10

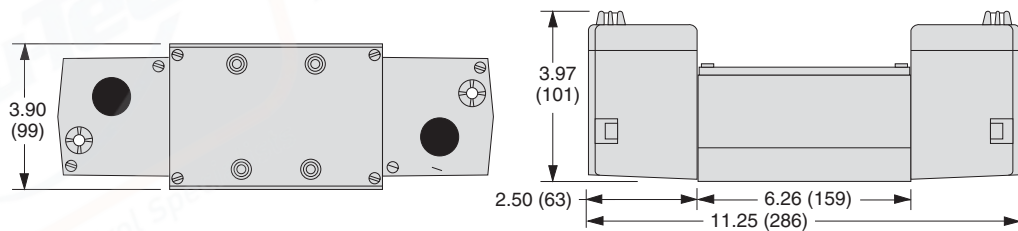

ANSI Size 20

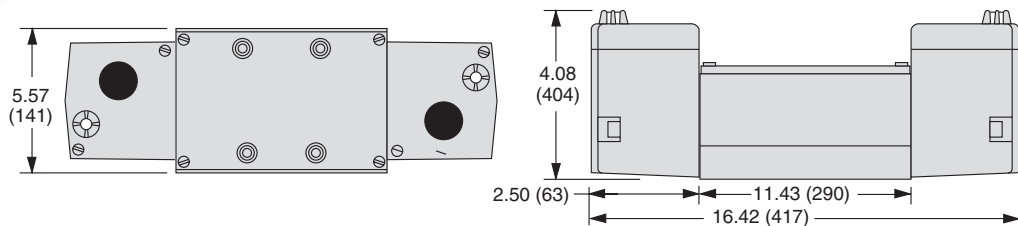

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/3 Double Solenoid Pilot Controlled Valves

DOUBLE SOLENOID PILOT CONTROLLED VALVES

5-Way 3-Position Valves

Center Position	Size		Valve Model Number*		
			Voltage		
	ANSI	Port	24 V DC	110-120 V AC	230 V AC
Power Center	1	1/4 – 3/8	W7077B2906W	W7077B2906Z	W7077B2906Y
	2.5	3/8 – 1/2	W7077A3904W	W7077A3904Z	W7077A3904Y
	4	3/8 – 3/4	W7077C4939W	W7077C4939Z	W7077C4939Y
	10	3/4 – 1-1/4	W7077A6920W	W7077A6920Z	W7077A6920Y
	20	1-1/4 – 1-1/2	W7077A8901W	W7077A8901Z	W7077A8901Y
Closed Center	1	1/4 – 3/8	W7077B2331W	W7077B2331Z	W7077B2331Y
	2.5	3/8 – 1/2	W7077A3331W	W7077A3331Z	W7077A3331Y
	4	3/8 – 3/4	W7077D4331W	W7077D4331Z	W7077D4331Y
	10	3/4 – 1-1/4	W7077C6331W	W7077C6331Z	W7077C6331Y
	20	1-1/4 – 1-1/2	W7077C8331W	W7077C8331Z	W7077C8331Y
Open Center	1	1/4 – 3/8	W7077B2332W	W7077B2332Z	W7077B2332Y
	2.5	3/8 – 1/2	W7077A3332W	W7077A3332Z	W7077A3332Y
	4	3/8 – 3/4	W7077D4332W	W7077D4332Z	W7077D4332Y
	10	3/4 – 1-1/4	W7077C6332W	W7077C6332Z	W7077C6332Y
	20	1-1/4 – 1-1/2	W7077C8332W	W7077C8332Z	W7077C8332Y


For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*			Weight lb (kg)
Body	Port 1		1-2	F		
		M		1-2	2-3	
1	1/4 – 3/8	1.0	20	3.6	4.9	4.0 (1.8)
2.5	3/8 – 1/2	2.5	17	1.6	2.7	4.0 (1.8)
4	3/8 – 3/4	4.2	20	0.6	0.6	6.5 (2.9)
10	3/4 – 1-1/4	10	30	0.3	0.3	8.5 (3.8)
20	1-1/4 – 1-1/2	22	50	0.1	0.2	15.3 (6.9)

Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

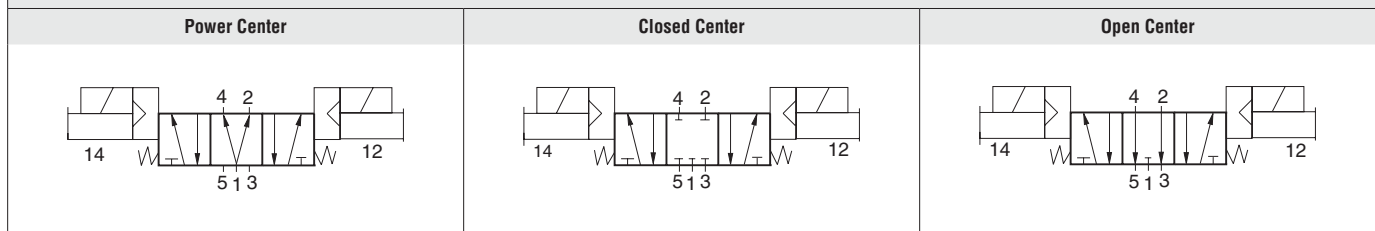


5/3 Double Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

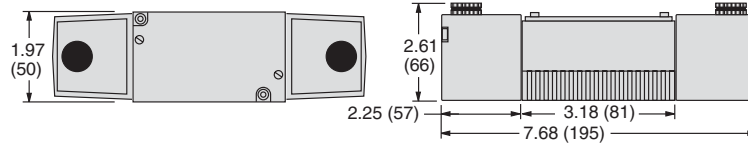


ANSI Size 2.5

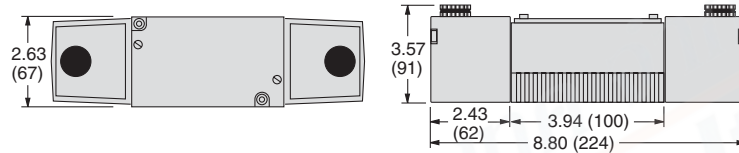


ANSI Size 4

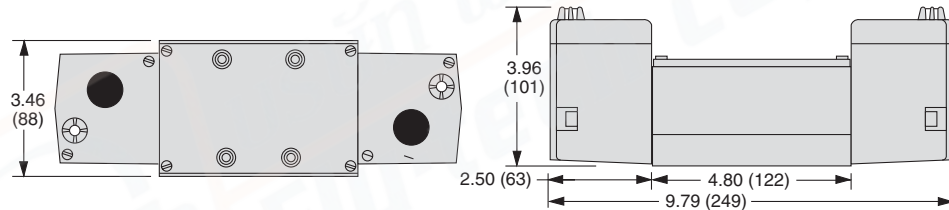

ANSI Size 10

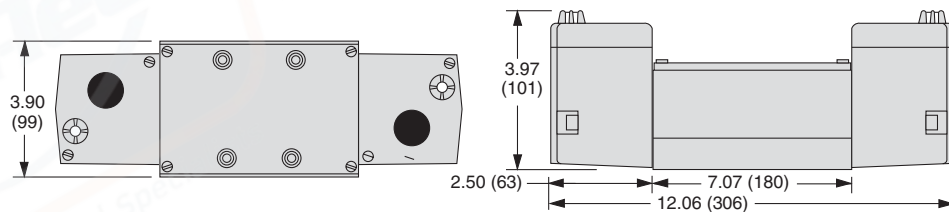

ANSI Size 20

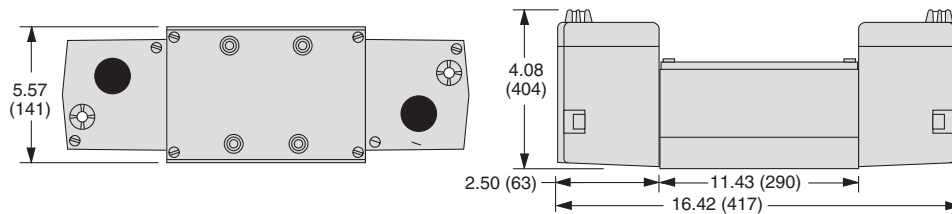

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/2 Direct Single Solenoid Pilot Controlled Valves

DIRECT SOLENOID PILOT CONTROLLED VALVES

5-Way 2-Position Valves

Size		Valve Model Number*		
		Voltage		
ANSI	Port	24 V DC	110-120 V AC	230 V AC
1	1/4 – 3/8	W7016B2331W	W7016B2331Z	W7016B2331Y
2.5	3/8 – 1/2	–	W7016A3331Z	W7016A3331Y
4	3/8 – 3/4	–	W7016C4331Z	W7016C4331Y


For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C_v	Average Response Constants*			Weight lb (kg)
Body	Port 1		1-2	F		
		M		1-2	2-3	
1	1/4 – 3/8	1.0	20	3.6	4.9	3.5 (1.6)
2.5	3/8 – 1/2	2.5	17	1.6	2.7	3.3 (1.5)
4	3/8 – 3/4	4.2	20	0.6	0.6	4.3 (1.9)

Valve Response Time – Response Time (msec) = $M + (F \cdot V)$. This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Direct Single Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

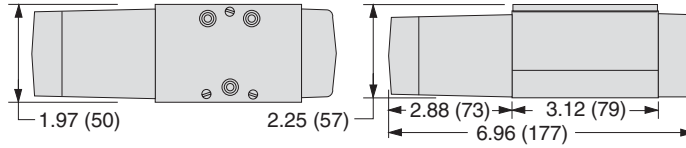

ANSI Size 2.5

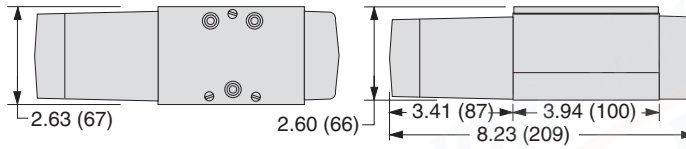

ANSI Size 4

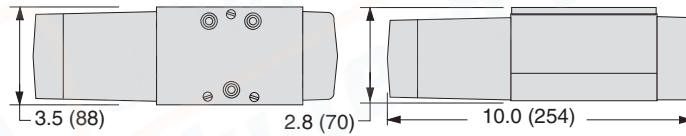

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/2 Direct Double Solenoid Pilot Controlled Valves

DIRECT SOLENOID PILOT CONTROLLED VALVES

5-Way 2-Position Valves

Size		Valve Model Number*		
		Voltage		
ANSI	Port	24 V DC	110-120 V AC	230 V AC
1	1/4 – 3/8	W7016B2332W	W7016B2332Z	W7016B2332Y
2.5	3/8 – 1/2	–	W7016A3332Z	W7016A3332Y
4	3/8 – 3/4	–	W7016C4332Z	W7016C4332Y


For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*			Weight lb (kg)
Body	Port 1	1-2	M	F		
				1-2	2-3	
1	1/4 – 3/8	1.0	20	3.6	4.9	3.5 (1.6)
2.5	3/8 – 1/2	2.5	17	1.6	2.7	3.3 (1.5)
4	3/8 – 3/4	4.2	20	0.6	0.6	4.3 (1.9)

Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Direct Double Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

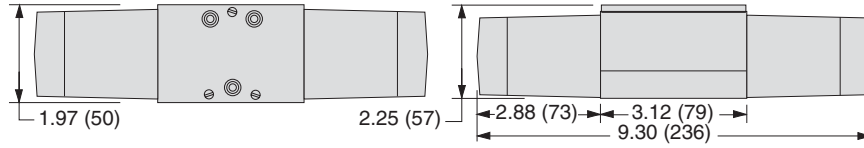

ANSI Size 2.5

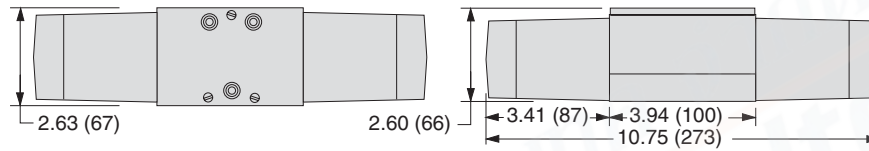

ANSI Size 4

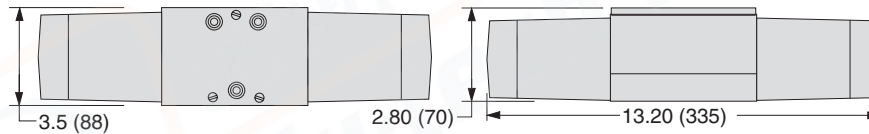

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/3 Direct Double Solenoid Pilot Controlled Valves

DIRECT SOLENOID PILOT CONTROLLED VALVES

5-Way 3-Position Valves

Center Position	Size		Valve Model Number*		
			Voltage		
	ANSI	Port	24 V DC	110-120 V AC	230 V AC
Power Center	1	1/8 - 3/8	W7017B2905W	W7017B2905Z	W7017B2905Y
Closed Center	1	1/8 - 3/8	W7017B2331W	W7017B2331Z	W7017B2331Y
	2.5	3/8 - 1/2	W7017A3331W	W7017A3331Z	W7017A3331Y
	4	1/2 - 3/4	W7017C4331W	W7017C4331Z	W7017C4331Y
Open Center	1	1/8 - 3/8	W7017B2332W	W7017B2332Z	W7017B2332Y
	2.5	3/8 - 1/2	W7017A3332W	W7017A3332Z	W7017A3332Y
	4	1/2 - 3/4	W7017C4332W	W7017C4332Z	W7017C4332Y


For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*			Weight lb (kg)
Body	Port 1		M	F		
				1-2	2-3	
1	1/8 - 3/8	1.0	20	3.5	4.9	4.5 (2.0)
2.5	3/8 - 1/2	1.9	10	1.3	1.8	5.0 (2.3)
4	1/2 - 3/4	3.8	-	-	-	5.8 (2.6)

Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

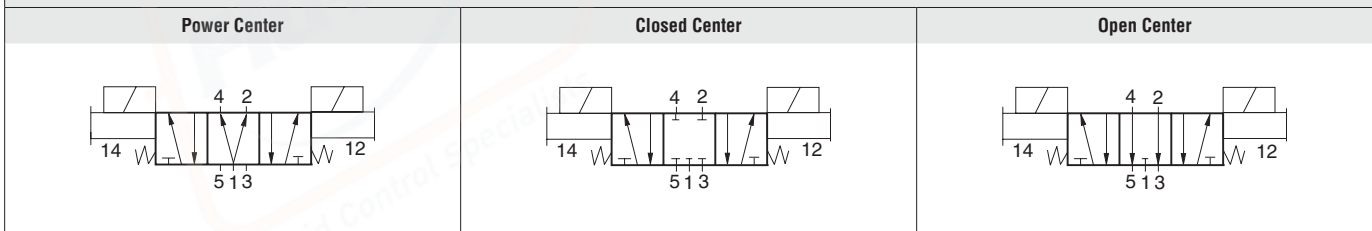


5/3 Direct Double Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

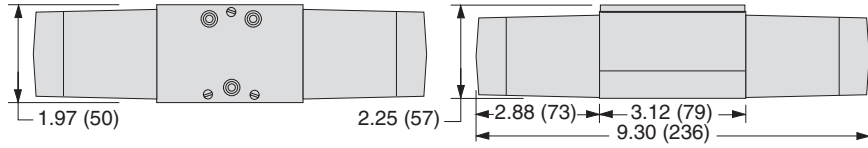

ANSI Size 2.5

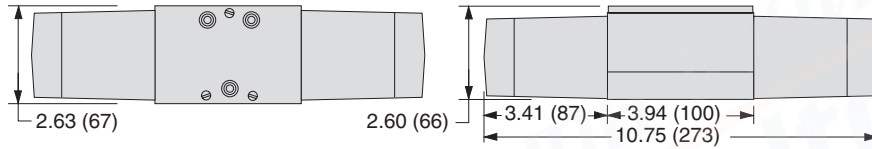

ANSI Size 4

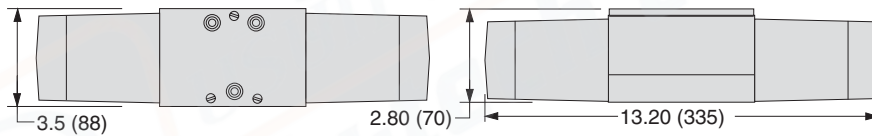

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/2 Single Pressure Controlled Valves

PRESSURE CONTROLLED VALVES

5-Way 2-Position Valves


Size		Valve Model Number*
ANSI	Port	
1	1/4 – 3/8	W7056B2331
2.5	3/8 – 1/2	W7056A3331
4	3/8 – 3/4	W7056B4331
10	3/4 – 1-1/4	W7056A6331
20	1-1/4 – 1-1/2	W7056A8331

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*			Weight lb (kg)
Body	Port 1		1-2	F		
		M		1-2	2-3	
1	1/4 – 3/8	1.0	20	3.6	4.9	2.5 (1.1)
2.5	3/8 – 1/2	2.5	17	1.5	2.6	2.0 (0.9)
4	3/8 – 3/4	4.2	12	0.6	0.7	4.3 (1.9)
10	3/4 – 1-1/4	10	20	0.3	0.3	6.3 (2.8)
20	1-1/4 – 1-1/2	22	30	0.1	0.2	13.0 (5.9)

Valve Response Time – Response Time (msec) = $M + (F \cdot V)$. This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



5/2 Single Pressure Controlled Valves

DIMENSIONS

Inches (mm)

ANSI Size 1	
ANSI Size 2.5	
ANSI Size 4	
ANSI Size 10	
ANSI Size 20	
<p>For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.</p>	

Ordering Information

5/2 Double Pressure Controlled Valves

PRESSURE CONTROLLED VALVES

5-Way 2-Position Valves


Size		Valve Model Number*
ANSI	Port	
1	1/4 - 3/8	W7056B2332
2.5	3/8 - 1/2	W7056A3332
4	3/8 - 3/4	W7056B4332
10	3/4 - 1 1/4	W7056A6332
20	1 1/4 - 1 1/2	W7056A8332

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*			Weight lb (kg)
Body	Port 1		1-2	F		
		M		1-2	2-3	
1	1/4 - 3/8	1.0	20	3.5	4.9	2.5 (1.1)
2.5	3/8 - 1/2	2.5	17	1.5	2.6	2.0 (0.9)
4	3/8 - 3/4	4.2	12	0.6	0.7	4.3 (1.9)
10	3/4 - 1-1/4	10	20	0.3	0.3	6.3 (2.8)
20	1-1/4 - 1-1/2	22	30	0.1	0.2	13.8 (6.2)

Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Double Pressure Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

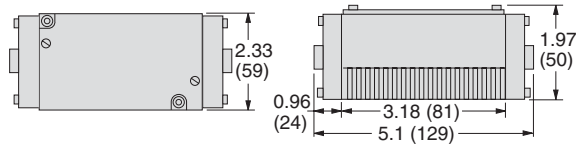


ANSI Size 2.5

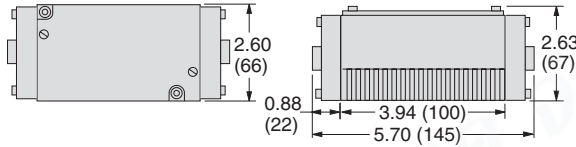


ANSI Size 4

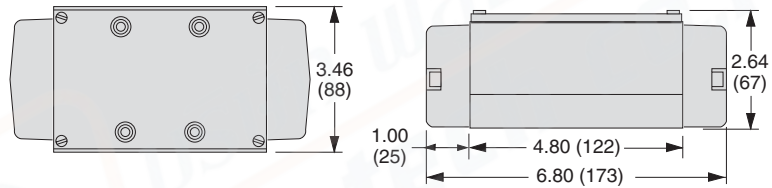

ANSI Size 10

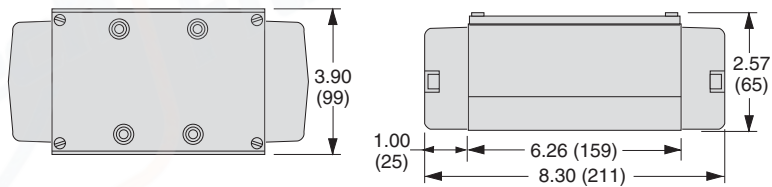

ANSI Size 20

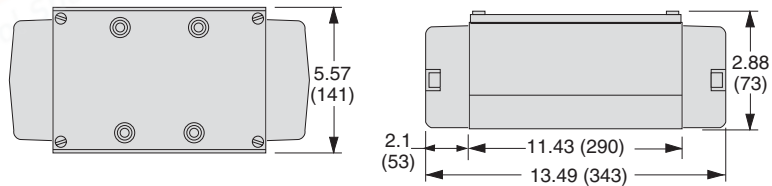

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/3 Double Pressure Controlled Valves

DOUBLE PRESSURE CONTROLLED VALVES

5-Way 3-Position Valves

Center Position	Size		Valve Model Number*
	ANSI	Port	24 V DC
Power Center	10	3/4 – 1-1/4	W7057A6902
Closed Center	1	1/4 – 3/8	W7057B2331
	2.5	3/8 – 1/2	W7057A3331
	4	3/8 – 3/4	W7057B4331
	10	3/4 – 1-1/4	W7057A6331
	20	1-1/4 – 1-1/2	W7057A8331
Open Center	1	1/4 – 3/8	W7057B2332
	2.5	3/8 – 1/2	W7057A3332
	4	3/8 – 3/4	W7057B4332
	10	3/4 – 1-1/4	W7057A6332
	20	1-1/4 – 1-1/2	W7057A8332

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*		Weight lb (kg)	
Body	Port 1		M	F		
				1-2	2-3	
1	1/4 – 3/8	1.0	20	3.5	4.9	2.5 (1.1)
2.5	3/8 – 1/2	2.5	17	1.5	2.6	2.0 (0.9)
4	3/8 – 3/4	4.2	12	0.6	0.7	4.3 (1.9)
10	3/4 – 1-1/4	10	20	0.3	0.3	6.3 (2.8)
20	1-1/4 – 1-1/2	22	30	0.1	0.2	13.8 (6.2)

Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic


Power Center	Closed Center	Open Center

5/3 Double Pressure Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

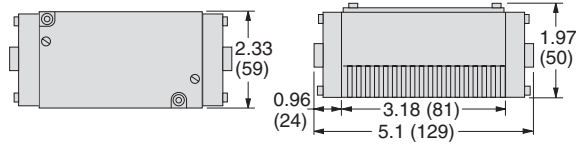


ANSI Size 2.5

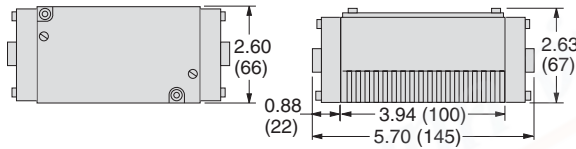


ANSI Size 4

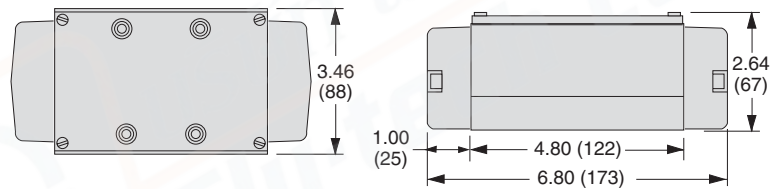

ANSI Size 10

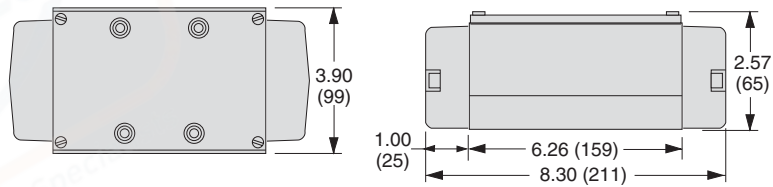

ANSI Size 20

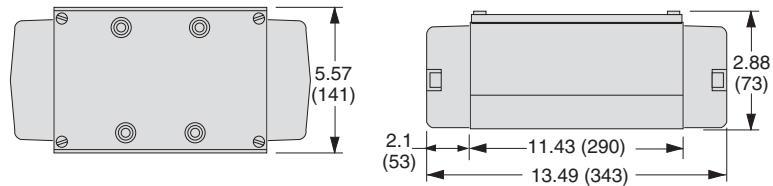

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

ANSI Valves W74 Series

Product Overview

The ROSS® ANSI Valves W74 Series are base mounted poppet valves that conform to the American National Standards Institute (ANSI) standards for valve-to-base interface configurations, including plug-and-socket electrical connections between valve and base.

These ANSI valves are available in Size 1, 2.5, 4, 10, and 20 as standard and high temperature valves, 2- and 3-position, 5-ported 4-way solenoid pilot or pressure controlled valves with either internal or external pilot supply. The poppet design is highly tolerant of contaminated air and are self compensating for wear.

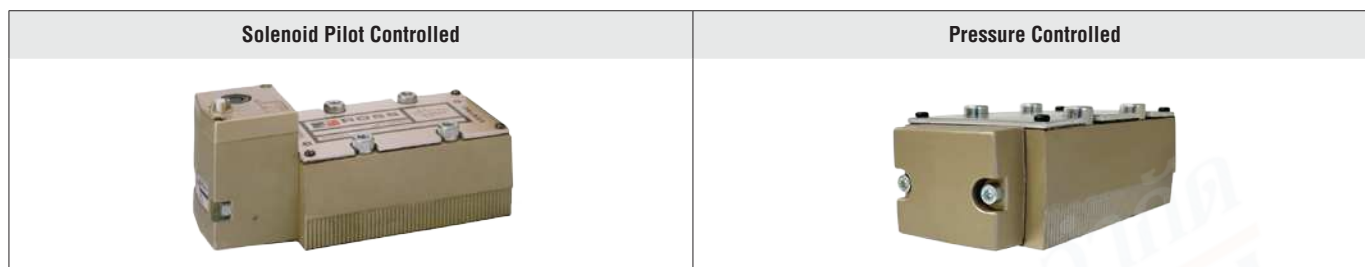


Illustration examples.

VALVE FEATURES

Poppet Design Poppet construction, highly tolerant of contaminated air and self compensating for wear

Mounting Options Individual sub-base or manifold base mounting

Pilot Supply Internal or external; suitable for vacuum service (with external pilot supply)

Pilot Operation Provides high shifting force with low power consumption

Actuation	ANSI Size	Available Inlet Port Sizes							Functions					Maximum Flow C.	Page
		1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	5/2		5/3				
									Single	Double	Power Center	Closed Center	Open Center		
Solenoid Control	1	●	●						●	●	●	●	●	1.0	24 – 27
	2.5		●	●					●	●	●	●	●	2.5	
	4			●	●				●	●	●	●	●	4.2	
	10				●	●	●		●	●	●	●	●	10.0	
	20						●	●	●	●	●	●	●	22.0	
Pressure Control	1	●	●						●	●	●	●	●	1.0	28 – 31
	2.5		●	●					●	●		●	●	2.5	
	4			●	●				●	●		●	●	4.2	
	10				●	●	●		●	●		●	●	10.0	
	20						●	●	●	●		●	●	22.0	
Sub-Bases														32 – 39	
Manifold Bases														40 – 41	
Accessories and Options														44	

STANDARD SPECIFICATIONS

GENERAL	Function	5/2 and 5/3 Valves
	Construction Design	Poppet
	Actuation	Electrical – Solenoid Pilot Controlled Pneumatic – Pressure Controlled
	Mounting	Sub-Base or Manifold
	Connection	Threaded; G, NPT
	Manual Override	Flush; rubber, non-locking

OPERATING CONDITIONS	Temperature	Solenoid Pilot Controlled	Standard Temperature	Ambient	40° to 120°F (5° to 50°C)	
				Media	40° to 175°F (5° to 80°C)	
			High Temperature	Ambient	40° to 175°F (5° to 80°C)	
			Media	40° to 220°F (5° to 105°C)		
		<i>For other temperature ranges, consult ROSS.</i>				
			Pressure Controlled	Standard Temperature	Ambient	0° to 300°F (-17° to 150°C)
		Media		0° to 300°F (-17° to 150°C)		
	High Temperature	Ambient		-40° to 175°F (-40° to 80°C)		
			Media	-40° to 175°F (-40° to 80°C)		
	<i>For other temperature ranges, consult ROSS.</i>					
Flow Media	Filtered air					
Operating Pressure	Vacuum to 150 psig (Vacuum to 10 bar)					
Pilot Supply Pressure	Minimum 30 psig (2 bar)					
External Pilot Supply	Must be equal to or greater than inlet pressure					

ELECTRICAL DATA FOR SOLENOID PILOT	Solenoids	Rated for continuous duty		
	Operating Voltage (each solenoid)	24 volts DC 100-110 volts AC, 50 Hz, 100-130 volts AC 60 Hz 230-240 volts AC, 60 Hz		
	Power Consumption	ANSI Size 1	24 V DC – 5 watts 100-130 V AC – 10 VA inrush, 24 VA holding 230-240 V AC – 10 VA inrush, 24 VA holding	
		ANSI Size 2.5, 4, 10, & 20	24 V DC – 14 watts 110-120 V AC – 87 VA inrush, 55 VA holding 230-240 V AC – 87 VA inrush, 55 VA holding	
Indicator Light	ANSI Size 4, 10, & 20	One per solenoid		

CONSTRUCTION MATERIAL	Valve Body	Cast Aluminum
	Poppet	Rubber Coated Aluminum & Stainless Steel
	Seals	Buna-N

IMPORTANT NOTE: Please read carefully and thoroughly all of the CAUTIONS, WARNINGS on the inside back cover.

PRODUCT CREDENTIALS

CSA Certificate of Compliance 	CE Conformity Declaration 	EAC Conformity Declaration 	CRN Certification Available for appropriately tested valves
--	--	---	---

Ordering Information

5/2 Single Solenoid Pilot Controlled Valves

SINGLE SOLENOID PILOT CONTROLLED VALVES

5-Way 2-Position Valves

Size		STANDARD TEMPERATURE			HIGH TEMPERATURE		
		Valve Model Number*			Valve Model Number*		
		Voltage			Voltage		
ANSI	Port	24 V DC	110-120 V AC	230 V AC	24 V DC	110-120 V AC	230 V AC
1	1/4 – 3/8	W7476B2331W	W7476B2331Z	W7476B2331Y	W7476B2336W	W7476B2336Z	W7476B2336Y
2.5	3/8 – 1/2	W7476A3331W	W7476A3331Z	W7476A3331Y	W7476A3336W	W7476A3336Z	W7476A3336Y
4	3/8 – 3/4	W7476D4331W	W7476D4331Z	W7476D4331Y	W7476D4336W	W7476D4336Z	W7476D4336Y
10	3/4 – 1-1/4	W7476C6331W	W7476C6331Z	W7476C6331Y	W7476C6336W	W7476C6336Z	W7476C6336Y
20	1-1/4 – 1-1/2	W7476C8331W	W7476C8331Z	W7476C8331Y	W7476C8336W	W7476C8336Z	W7476C8336Y


For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*		Weight lb (kg)	
Body	Port 1	1-2	M	F		
				1-2		2-3
1	1/4 – 3/8	0.9	30	2.7	5.6	3.0 (1.4)
2.5	3/8 – 1/2	2.0	25	1.5	2.9	3.0 (1.4)
4	3/8 – 3/4	4.2	27	0.6	1.0	5.0 (2.3)
10	3/4 – 1-1/4	11	30	0.3	0.5	6.1 (2.8)
20	1-1/4 – 1-1/2	22	50	0.1	0.2	18.5 (8.3)

Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Single Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

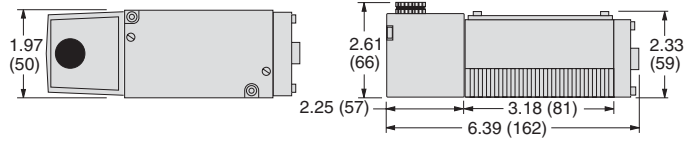


ANSI Size 2.5

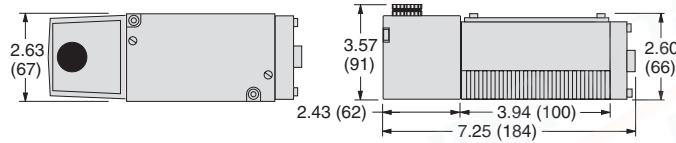


ANSI Size 4

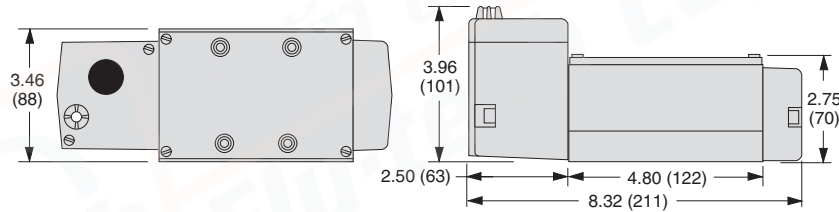

ANSI Size 10

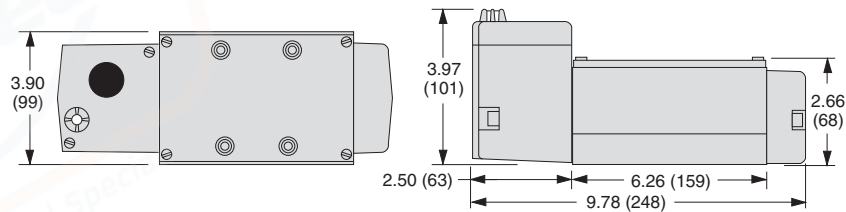

ANSI Size 20

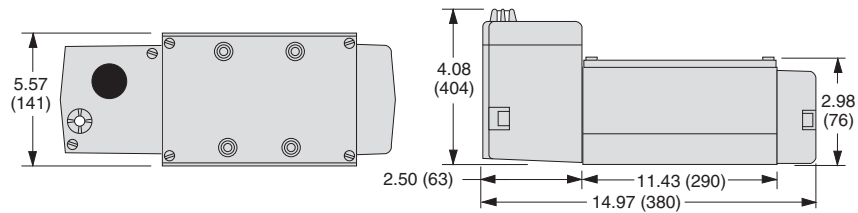

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/2 Double Solenoid Pilot Controlled Valves

DOUBLE SOLENOID PILOT CONTROLLED VALVES

5-Way 2-Position Valves

Size		STANDARD TEMPERATURE			HIGH TEMPERATURE		
		Valve Model Number*			Valve Model Number*		
ANSI	Port	24 V DC	110-120 V AC	230 V AC	24 V DC	110-120 V AC	230 V AC
1	1/4 – 3/8	W7476B2332W	W7476B2332Z	W7476B2332Y	W7476B2337W	W7476B2337Z	W7476B2337Y
2.5	3/8 – 1/2	W7476A3332W	W7476A3332Z	W7476A3332Y	W7476A3337W	W7476A3337Z	W7476A3337Y
4	3/8 – 3/4	W7476D4332W	W7476D4332Z	W7476D4332Y	W7476D4337W	W7476D4337Z	W7476D4337Y
10	3/4 – 1-1/4	W7476C6332W	W7476C6332Z	W7476C6332Y	W7476C6337W	W7476C6337Z	W7476C6337Y
20	1-1/4 – 1-1/2	W7476C8332W	W7476C8332Z	W7476C8332Y	W7476C8337W	W7476C8337Z	W7476C8337Y


For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C_v	Average Response Constants*			Weight lb (kg)
Body	Port 1		1-2	M	F	
		1-2			2-3	
1	1/4 – 3/8	0.9	30	2.7	5.6	3.0 (1.4)
2.5	3/8 – 1/2	2.0	25	1.5	2.9	3.0 (1.4)
4	3/8 – 3/4	4.2	27	0.6	1.0	5.0 (2.3)
10	3/4 – 1-1/4	11	30	0.3	0.5	6.1 (2.8)
20	1-1/4 – 1-1/2	22	50	0.1	0.2	18.5 (8.3)

Valve Response Time – Response Time (msec) = $M + (F \cdot V)$. This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Double Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

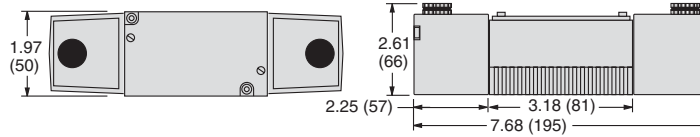


ANSI Size 2.5

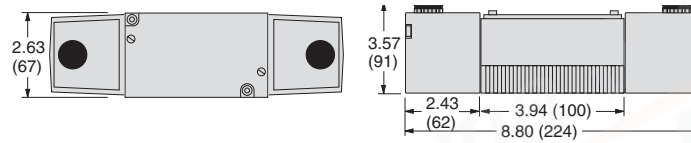


ANSI Size 4

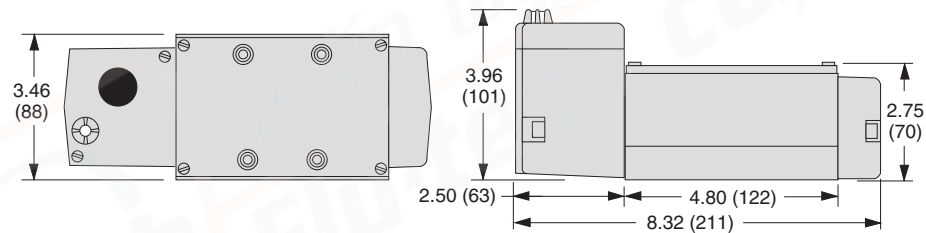

ANSI Size 10

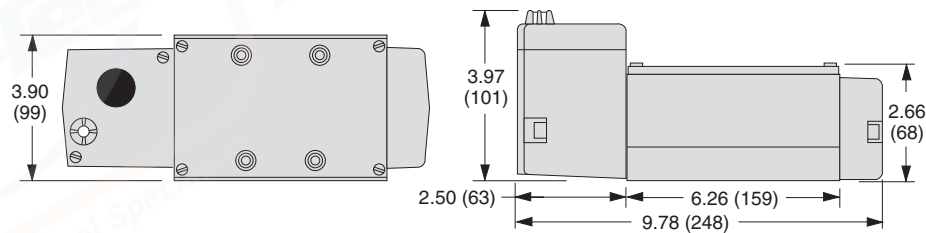

ANSI Size 20

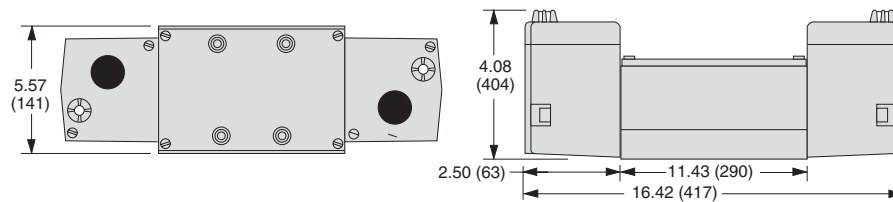

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Ordering Information

5/2 Single Pressure Controlled Valves

SINGLE PRESSURE CONTROLLED VALVES

5-Way 2-Position Valves


Size		STANDARD TEMPERATURE	HIGH TEMPERATURE
ANSI	Port	Valve Model Number*	Valve Model Number*
1	1/4 – 3/8	W7456B2331	W7456B2336
2.5	3/8 – 1/2	W7456A3331	W7456A3336
4	3/8 – 3/4	W7456B4331	W7456B4336
10	3/4 – 1-1/4	W7456A6331	W7456A6336
20	1-1/4 – 1-1/2	W7456A8331	W7456A8336

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*			Weight lb (kg)
Body	Port 1		1-2	F		
		M		1-2	2-3	
1	1/4 – 3/8	1.0	20	3.6	4.9	2.5 (1.1)
2.5	3/8 – 1/2	2.5	17	1.5	2.6	2.0 (0.9)
4	3/8 – 3/4	4.2	12	0.6	0.7	4.3 (1.9)
10	3/4 – 1-1/4	10	20	0.3	0.3	6.3 (2.8)
20	1-1/4 – 1-1/2	22	30	0.1	0.2	13.0 (5.9)

Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



5/2 Single Pressure Controlled Valves

DIMENSIONS

Inches (mm)

ANSI Size 1	
ANSI Size 2.5	
ANSI Size 4	
ANSI Size 10	
ANSI Size 20	
<p>For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.</p>	

Ordering Information

5/2 Double Pressure Controlled Valves

DOUBLE PRESSURE CONTROLLED VALVES

5-Way 2-Position Valves


Size		STANDARD TEMPERATURE	HIGH TEMPERATURE
ANSI	Port	Valve Model Number*	Valve Model Number*
1	1/4 – 3/8	W7456B2332	W7456B2337
2.5	3/8 – 1/2	W7456A3332	W7456A3337
4	3/8 – 3/4	W7456B4332	W7456B4337
10	3/4 – 1-1/4	W7456A6332	W7456A6337
20	1-1/4 – 1-1/2	W7456A8332	W7456A8337

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds section.

Size		Flow C _v	Average Response Constants*			Weight lb (kg)
Body	Port 1	1-2	M	F		
				1-2	2-3	
1	1/4 – 3/8	0.9	30	2.7	5.6	2.5 (1.1)
2.5	3/8 – 1/2	2.0	25	1.4	2.9	2.0 (0.9)
4	3/8 – 3/4	4.2	16	0.5	1.1	3.3 (1.5)
10	3/4 – 1-1/4	11	14	0.3	0.5	7.3 (3.3)
20	1-1/4 – 1-1/2	22	32	0.1	0.2	17.5 (7.9)

Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Double Pressure Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1

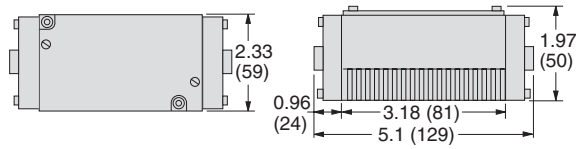


ANSI Size 2.5

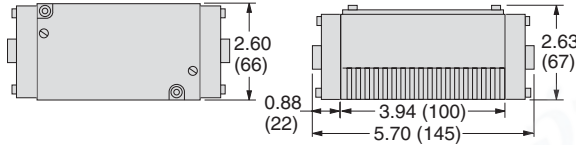


ANSI Size 4

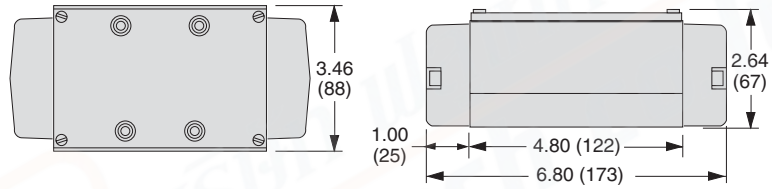

ANSI Size 10

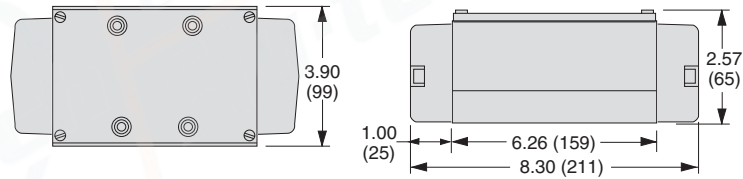

ANSI Size 20

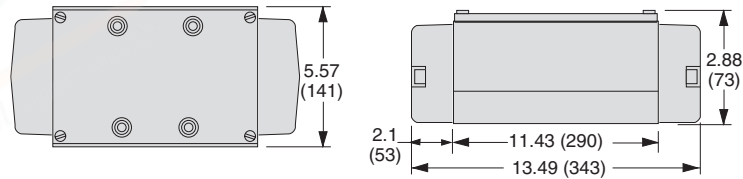

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Sub-Bases – Side Ported Ordering Information

For Solenoid Pilot Controlled Valves

SIDE PORTED SUB-BASES

Indicator Lights in Base	ANSI Size	Outlet Port	Model Number		Avg. C _v
			G Thread	NPT Thread	
None	1	1/4	D500B91	500B91	0.9 to 1.0
		3/8	D501B91	501B91	0.9 to 1.0
	2.5	3/8	D474K91	474K91	2.0 to 2.5
		1/2	D475K91	475K91	2.0 to 2.5
	4	3/8	D361B91	361B91	4.2
		1/2	D362B91	362B91	4.2
		3/4	D363B91	363B91	4.2
	10	3/4	D364B91	364B91	10 to 11
		1	D365B91	365B91	10 to 11
		1-1/4	D366B91	366B91	10 to 11
	20	1-1/4	D367B91	367B91	22
		1-1/2	D368B91	368B91	22

Indicator Lights in Base	ANSI Size	Outlet Port	Model Number						Avg. C _v
			G Thread			NPT Thread			
			24 V DC	110-120 V AC	230 V AC	24 V DC	110-120 V AC	230 V AC	
One	1	1/4	D525K91-W	D525K91-Z	D525K91-Y	525K91-W	525K91-Z	525K91-Y	0.9 to 1.0
		3/8	D527K91-W	D527K91-Z	D527K91-Y	527K91-W	527K91-Z	527K91-Y	0.9 to 1.0
	2.5	3/8	D482K91-W	D482K91-Z	D482K91-Y	482K91-W	482K91-Z	482K91-Y	2.0 to 2.5
		1/2	D483K91-W	D483K91-Z	D483K91-Y	483K91-W	483K91-Z	483K91-Y	2.0 to 2.5
Two	1	1/4	D525K91-W	D525K91-Z	D525K91-Y	526K91-W	526K91-Z	526K91-Y	0.9 to 1.0
		3/8	D527K91-W	D527K91-Z	D527K91-Y	528K91-W	528K91-Z	528K91-Y	0.9 to 1.0
	2.5	3/8	D482K91-W	D482K91-Z	D482K91-Y	484K91-W	484K91-Z	484K91-Y	2.0 to 2.5
		1/2	D483K91-W	D483K91-Z	D483K91-Y	485K91-W	485K91-Z	485K91-Y	2.0 to 2.5

For other voltages, consult ROSS.

Sub-base for ANSI Size 4 valve illustrated




For Solenoid Pilot Controlled Valves

DIMENSIONS


Inches (mm)

ANSI Size
1 & 2.5

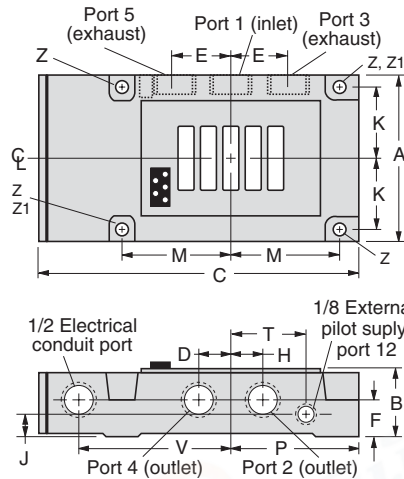

Dimensions inches (mm)					
	ANSI 1	ANSI 2.5	ANSI 4	ANSI 10	ANSI 20
A	2.80 (71)	3.56 (90)	3.36 (85)	5.08 (129)	6.64 (169)
B	1.44 (37)	1.61 (41)	2.64 (67)	3.78 (96)	3.70 (94)
C	6.15 (156)	7.09 (180)	7.21 (183)	10.45 (266)	12.34 (313)
D	0.51 (13)	0.63 (16)	0.75 (19)	1.38 (35)	1.38 (35)
E	0.88 (22)	1.25 (32)	1.50 (38)	2.76 (70)	2.76 (70)
F	0.78 (20)	0.93 (23)	1.23 (31)	1.75 (44)	1.59 (40)
H	0.58 (15)	0.63 (16)	2.21 (56)	3.01 (76)	2.85 (72)
J	0.38 (10)	0.50 (13)	-	-	-
K	1.13 (29)	1.50 (38)	-	2.05 (52)	2.38 (60)
M	1.88 (48)	2.31 (59)	-	4.33 (110)	5.35 (136)
P	2.43 (62)	2.97 (75)	2.86 (73)	4.76 (121)	5.86 (149)
S	-	-	2.36 (60)	-	-
T	1.35 (34)	1.78 (45)	-	-	-
U	-	-	0.83 (21)	1.97 (50)	1.54 (39)
V	2.75 (70)	3.29 (83)	3.07 (78)	4.65 (118)	5.60 (142)
W	-	-	1.23 (31)	2.50 (64)	2.15 (55)
Z	0.27 (7)	-	0.30 (7)	-	-
Z1	-	0.28 (7)	-	0.34 (9)	0.37 (9)

ANSI Size
4, 10, & 20

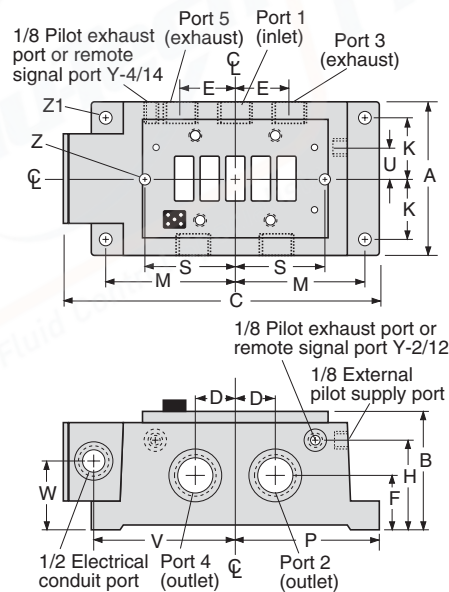

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Sub-Bases – Side Ported Ordering Information

For Pressure Controlled Valves

SIDE PORTED SUB-BASES

ANSI Size	Outlet Port	Model Number		Avg. C _v
		G Thread	NPT Thread	
1	1/4	D500B91	500B91	0.9 to 1.0
	3/8	D501B91	501B91	0.9 to 1.0
2.5	3/8	D474K91	474K91	2.0 to 2.5
	1/2	D475K91	475K91	2.0 to 2.5
4	3/8	D361B91	361B91	4.2
	1/2	D362B91	362B91	4.2
	3/4	D363B91	363B91	4.2
10	3/4	D364B91	364B91	10 to 11
	1	D365B91	365B91	10 to 11
	1-1/4	D366B91	366B91	10 to 11
20	1-1/4	D367B91	367B91	22
	1-1/2	D368B91	368B91	22

Sub-base for ANSI Size 4 valve illustrated




For Pressure Controlled Valves

DIMENSIONS


Inches (mm)

ANSI Size
1 & 2.5

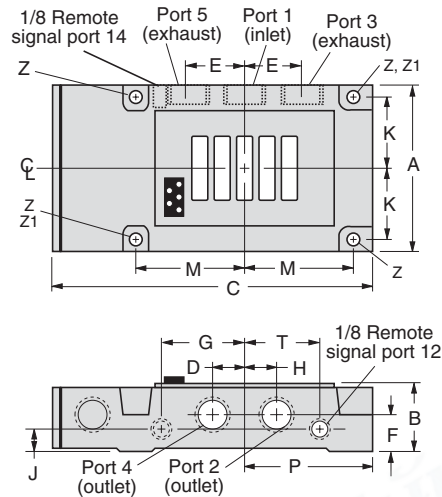

Dimensions inches (mm)					
	ANSI 1	ANSI 2.5	ANSI 4	ANSI 10	ANSI 20
A	2.80 (71)	3.56 (90)	3.36 (85)	5.08 (129)	6.64 (169)
B	1.44 (37)	1.61 (41)	2.64 (67)	3.78 (96)	3.70 (94)
C	6.15 (156)	7.09 (180)	7.21 (183)	10.45 (266)	12.34 (313)
D	0.51 (13)	0.63 (16)	0.75 (19)	1.38 (35)	1.38 (35)
E	0.88 (22)	1.25 (32)	1.50 (38)	2.76 (70)	2.76 (70)
F	0.78 (20)	0.93 (23)	1.23 (31)	1.75 (44)	1.59 (40)
H	0.58 (15)	0.63 (16)	2.21 (56)	3.01 (76)	2.85 (72)
J	0.38 (10)	0.50 (13)	-	-	-
K	1.13 (29)	1.50 (38)	-	2.05 (52)	2.38 (60)
M	1.88 (48)	2.31 (59)	-	4.33 (110)	5.35 (136)
P	2.43 (62)	2.97 (75)	2.86 (73)	4.76 (121)	5.86 (149)
S	-	-	2.36 (60)	-	-
T	1.35 (34)	1.78 (45)	-	-	-
U	-	-	0.83 (21)	1.97 (50)	1.54 (39)
V	-	-	-	-	-
Z	0.27 (7)	-	0.30 (7)	-	-
Z1	-	0.28 (7)	-	0.34 (9)	0.37 (9)

ANSI Size
4, 10, & 20

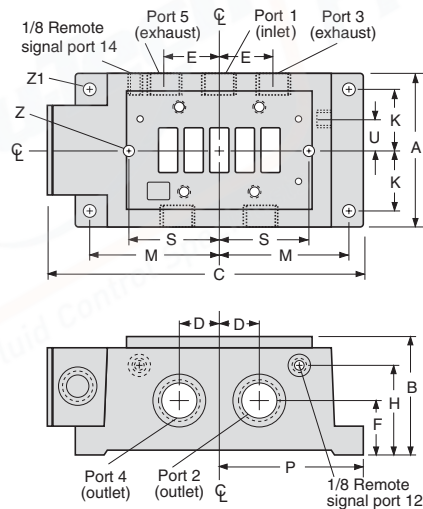

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Sub-Bases – Side & Bottom Ported Ordering Information

For Solenoid Pilot or Pressure Controlled Valves

SIDE & BOTTOM PORTED SUB-BASE

Indicator Lights in Base	ANSI Size	Outlet Port	Model Number		Avg. C _v
			G Thread	NPT Thread	
None	1	1/4	D499B91	499B91	0.9 to 1.0
	2.5	3/8	D476K91	476K91	2.0 to 2.5
	4	3/8	D369B91	369B91	4.2
		1/2	D370B91	370B91	4.2
		3/4	D371B91	371B91	4.2

Indicator Lights in Base	ANSI Size	Outlet Port	Model Number						Avg. C _v
			G Thread			NPT Thread			
			24 V DC	110-120 V AC	230 V AC	24 V DC	110-120 V AC	230 V AC	
One	1	1/4	D529K91-W	D529K91-Z	D529K91-Y	529K91-W	529K91-Z	529K91-Y	0.9 to 1.0
	2.5	3/8	D477K91-W	D477K91-Z	D477K91-Y	477K91-W	477K91-Z	477K91-Y	2.0 to 2.5
Two	1	1/4	D530K91-W	D530K91-Z	D530K91-Y	530K91-W	530K91-Z	530K91-Y	0.9 to 1.0
	2.5	3/8	D486K91-W	D486K91-Z	D486K91-Y	486K91-W	486K91-Z	486K91-Y	0.9 to 1.0




For other voltages, consult ROSS.

For Solenoid Pilot Controlled Valves




DIMENSIONS

Inches (mm)

ANSI Size 1 & 2.5

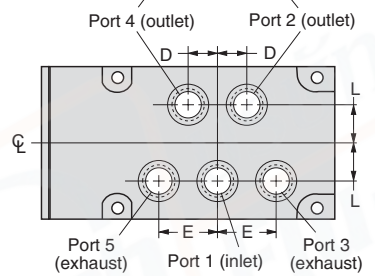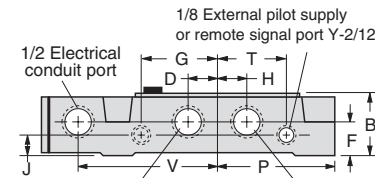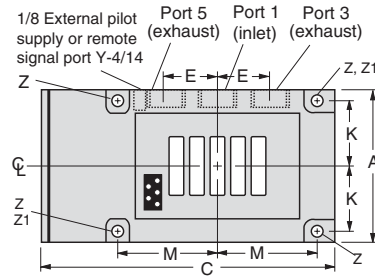

ANSI Size 4

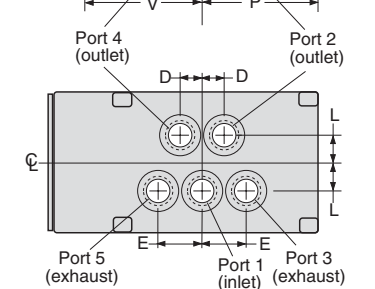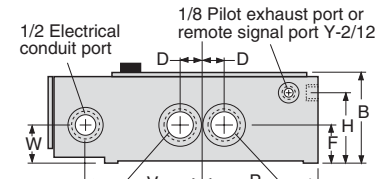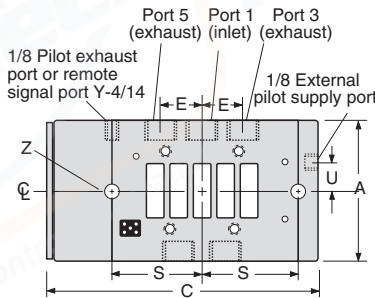

Dimensions inches (mm)			
	ANSI 1	ANSI 2.5	ANSI 4
A	2.80 (71)	3.56 (90)	3.36 (85)
B	1.44 (37)	1.61 (41)	2.64 (67)
C	6.15 (156)	7.09 (180)	7.21 (183)
D	0.51 (13)	0.63 (16)	0.75 (19)
E	0.88 (22)	1.25 (32)	1.50 (38)
F	0.78 (20)	0.93 (23)	1.23 (31)
G	1.46 (37)	2.41 (61)	-
H	0.58 (15)	0.63 (16)	2.21 (56)
J	0.38 (10)	0.50 (13)	-
K	1.13 (29)	1.50 (38)	-
L	0.63 (16)	0.81 (21)	-
M	1.88 (48)	2.31 (59)	-
P	2.43 (62)	2.97 (75)	2.86 (73)
S	-	-	2.36 (60)
T	1.35 (34)	1.78 (45)	-
U	-	-	0.83 (21)
V	2.75 (70)	3.29 (83)	-
Z	0.27 (7)	-	0.30 (7)
Z1	-	0.28 (7)	-


For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Sub-Bases – Bottom Ported Ordering Information

For Solenoid Pilot or Pressure Controlled Valves

BOTTOM PORTED SUB-BASE

ANSI Size	Outlet Port	Model Number		Avg. C _v
		G Thread	NPT Thread	
10	3/4	D372B91	372B91	10 to 11
	1	D373B91	373B91	10 to 11
	1-1/4	D374B91	374B91	10 to 11
20	1-1/4	D375B91	375B91	22
	1-1/2	D376B91	376B91	22

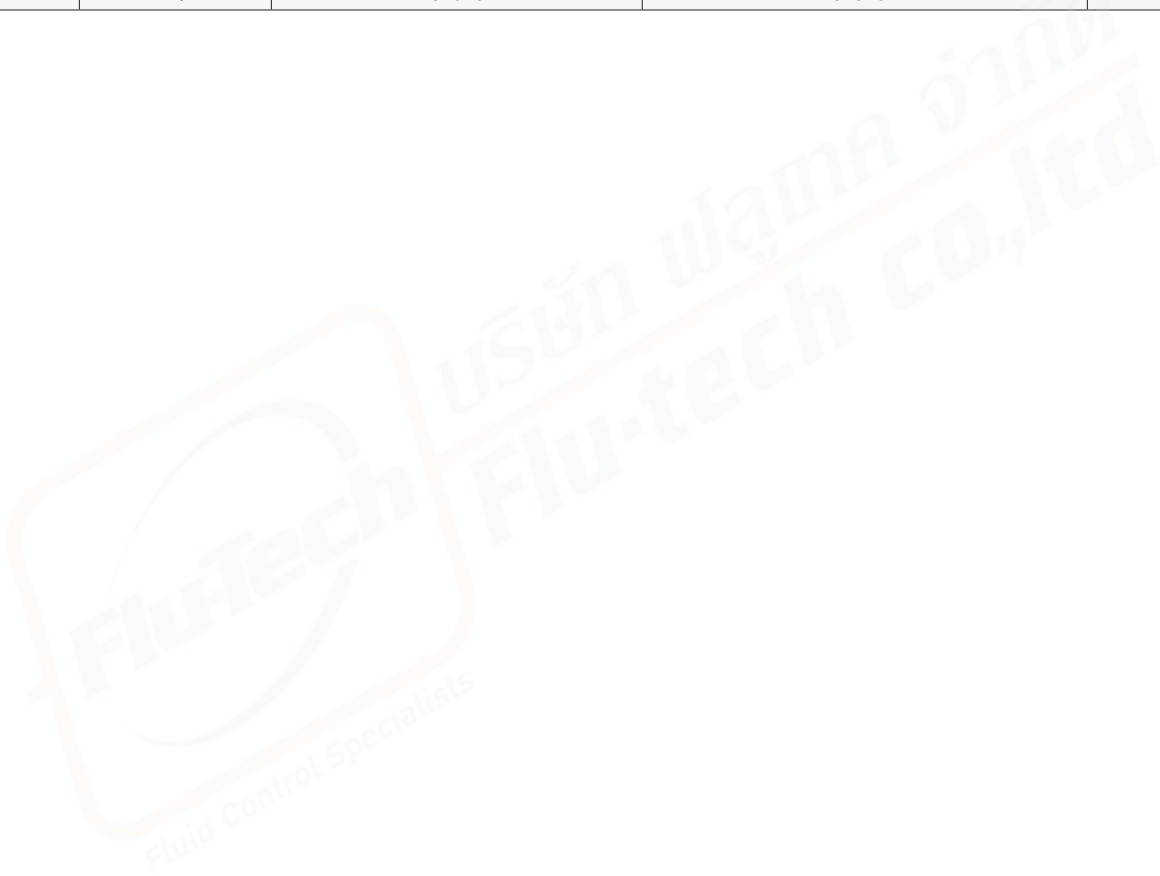


For Solenoid Pilot or Pressure Controlled Valves

DIMENSIONS


Inches (mm)

for Solenoid Pilot Controlled Valves

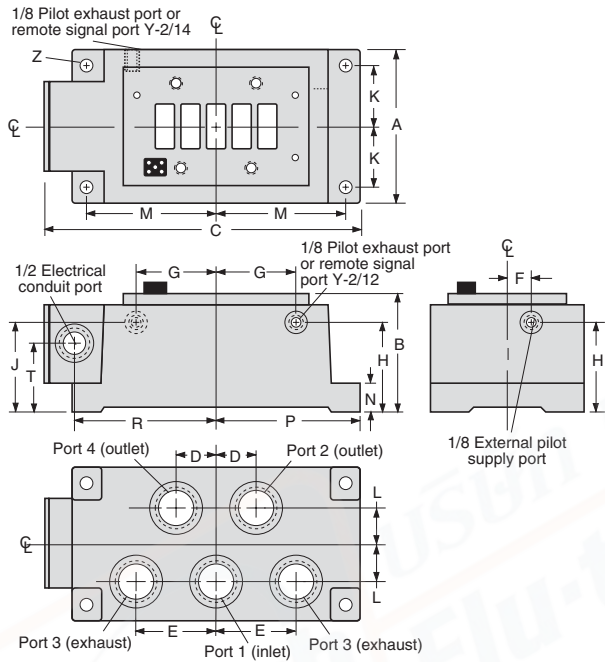

Dimensions inches (mm)		
	ANSI 10	ANSI 20
A	5.8 (129)	6.64 (169)
B	3.78 (96)	3.70 (94)
C	10.45 (266)	12.34 (313)
D	1.38 (35)	1.38 (35)
E	2.76 (70)	2.76 (76)
F	1.03 (26)	1.54 (39)
G	2.60 (66)	3.90 (99)
H	3.01 (76)	2.85 (72)
J	3.25 (83)	2.85 (72)
K	2.05 (52)	2.38 (60)
L	1.22 (31)	1.22 (31)
M	4.33 (110)	5.36 (136)
N	0.88 (22)	1.00 (25)
P	4.76 (121)	5.82 (148)
R	4.65 (118)	5.60 (142)
T	2.50 (64)	2.15 (55)
Z	0.34 (8)	0.37 (9)

for Pressure Controlled Valves

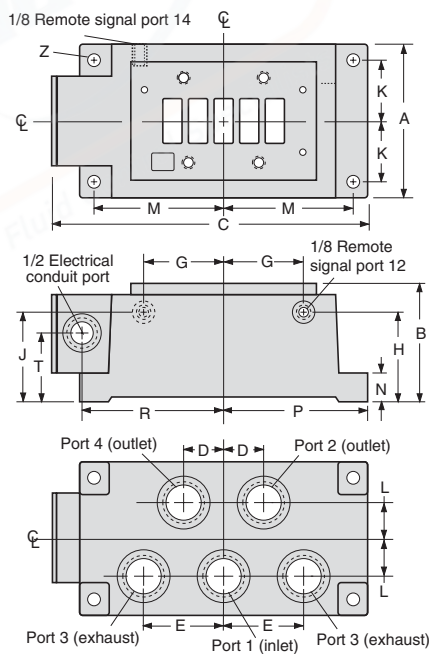

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Manifold Bases Ordering Information

For Solenoid Pilot Controlled Valves


MANIFOLD BASES

Indicator Lights in Base	ANSI Size	Outlet Port	Model Number		Avg. C _v
			G Thread	NPT Thread	
None	1	1/4	D502B91	502B91	0.9 to 1.0
		3/8	D503B91	503B91	0.9 to 1.0
	2.5	3/8	D472K91	472K91	2.0 to 2.5
		1/2	D473K91	473K91	2.0 to 2.5
	4	3/8	D377B91	377B91	4.2
		1/2	D378B91	378B91	4.2
		3/4	D379B91	379B91	4.2
	10	3/4	D380B91	380B91	10 to 11
		1	D381B91	381B91	10 to 11
1-1/4		D382B91	382B91	10 to 11	

Indicator Lights in Base	ANSI Size	Outlet Port	Model Number						Avg. C _v
			G Thread			NPT Thread			
			24 V DC	110-120 V AC	230 V AC	24 V DC	110-120 V AC	230 V AC	
One	1	1/4	D531K91-W	D531K91-Z	D531K91-Y	531K91-W	531K91-Z	531K91-Y	0.9 to 1.0
		3/8	D533K91-W	D533K91-Z	D533K91-Y	533K91-W	533K91-Z	533K91-Y	0.9 to 1.0
	2.5	3/8	D478K91-W	D478K91-Z	D478K91-Y	478K91-W	478K91-Z	478K91-Y	2.0 to 2.5
		1/2	D479K91-W	D479K91-Z	D479K91-Y	479K91-W	479K91-Z	479K91-Y	2.0 to 2.5
Two	1	1/4	D532K91-W	D532K91-Z	D532K91-Y	532K91-W	532K91-Z	532K91-Y	0.9 to 1.0
		3/8	D534K91-W	D534K91-Z	D534K91-Y	534K91-W	534K91-Z	534K91-Y	0.9 to 1.0
	2.5	3/8	D480K91-W	D480K91-Z	D480K91-Y	480K91-W	480K91-Z	480K91-Y	2.0 to 2.5
		1/2	D481K91-W	D481K91-Z	D481K91-Y	481K91-W	481K91-Z	481K91-Y	2.0 to 2.5

For other voltages, consult ROSS.


The model numbers of the manifold stations shown on this page specify pressure ports with NPT threads and electrical openings with 1-1/4 NPT threads. All necessary hardware and seals for manifold assembly are included with each manifold station.

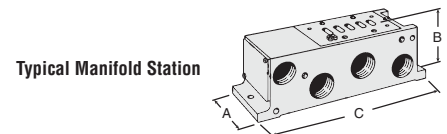

Indicator Lights

As shown in the chart the smaller sizes of manifolds are available with indicator lights. These lights are located in the end plate covering the electrical cavity.

Lights are mounted in bases, on the valves, or on solenoids, depending on the particular type of valve.



Manifold Note

The port positions of the solenoid controlled and the pressure controlled manifolds are not the same. For this reason these stations cannot be mixed in the same installation. If both types of valves must be used in the same installation, use only manifold stations for solenoid controlled valves.

ASSEMBLED MANIFOLDS

Valves and manifold stations can be assembled by ROSS to precise specifications. The assembly is then ready for integration into your system. For detailed information about such assemblies, consult your ROSS Distributor or call ROSS in the U.S.A. at 1-888-TEK-ROSS (835-7677) or 1-248-764-1800.

Manifold Bases Technical Data




For Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1 & 2.5

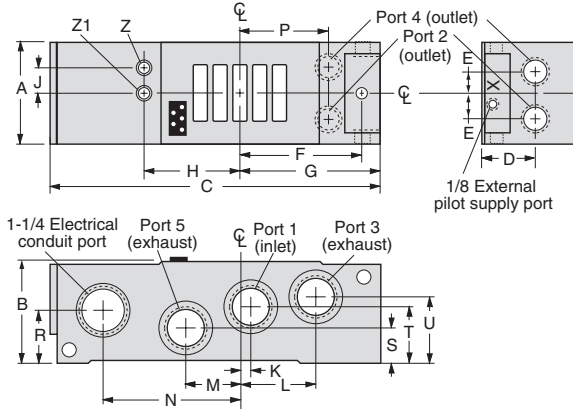

ANSI Size 4

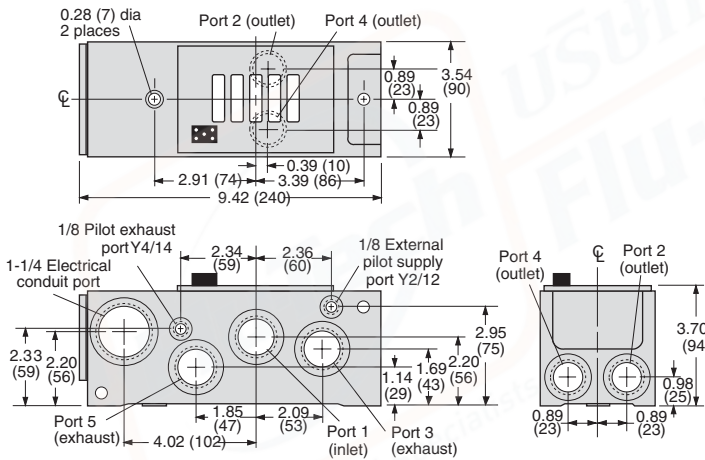

ANSI Size 10

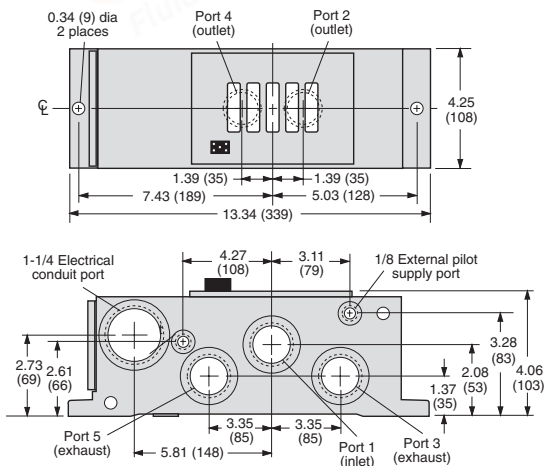

Sub-Base Dimensions inches (mm)

	ANSI 1	ANSI 2.5	ANSI 4	ANSI 10	ANSI 20
A	2.80 (71)	3.56 (90)	3.36 (85)	5.08 (129)	6.64 (169)
B	1.44 (37)	1.61 (41)	2.64 (67)	3.78 (96)	3.70 (94)
C	6.15 (156)	7.09 (180)	7.21 (183)	10.45 (266)	12.34 (313)
D	0.51 (13)	0.63 (16)	0.75 (19)	1.38 (35)	1.38 (35)
E	0.88 (22)	1.25 (32)	1.50 (38)	2.76 (70)	2.76 (70)
F	0.78 (20)	0.93 (23)	1.23 (31)	1.75 (44)	1.59 (40)
H	0.58 (15)	0.63 (16)	2.21 (56)	3.01 (76)	2.85 (72)
J	0.38 (10)	0.50 (13)	-	-	-
K	1.13 (29)	1.50 (38)	-	2.05 (52)	2.38 (60)
M	1.88 (48)	2.31 (59)	-	4.33 (110)	5.35 (136)
P	2.43 (62)	2.97 (75)	2.86 (73)	4.76 (121)	5.86 (149)
S	-	-	2.36 (60)	-	-
T	1.35 (34)	1.78 (45)	-	-	-
U	-	-	0.83 (21)	1.97 (50)	1.54 (39)
V	2.75 (70)	3.29 (83)	3.07 (78)	4.65 (118)	5.60 (142)
W	-	-	1.23 (31)	2.50 (64)	2.15 (55)
Z	0.27 (7)	-	0.30 (7)	-	-
Z1	-	0.28 (7)	-	0.34 (9)	0.37 (9)

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Manifold Bases Ordering Information


For Pressure Controlled Valves

MANIFOLD BASES

Indicator Lights in Base	ANSI Size	Outlet Port	Model Number		Avg. C _v
			G Thread	NPT Thread	
None	1	1/4	D359B91	359B91	0.9 to 1.0
		3/8	D360B91	360B91	0.9 to 1.0
	2.5	3/8	D468B91	468B91	2.0 to 2.5
		1/2	D469B91	469B91	2.0 to 2.5
	4	3/8	D383B91	383B91	4.2
		1/2	D384B91	384B91	4.2
		3/4	D385B91	385B91	4.2
	10	3/4	D386B91	386B91	10 to 11
		1	D387B91	387B91	10 to 11
		1-1/4	D388B91	388B91	10 to 11

The numbers of the manifold stations shown in the chart on the right specify pressure ports with NPT threads. All necessary hardware and seals for manifold assembly are included with each manifold station.

Typical Manifold Station



Manifold Note

The port positions of the solenoid controlled and the pressure controlled manifolds are not the same. For this reason these stations cannot be mixed in the same installation. If both types of valves must be used in the same installation, use only manifold stations for solenoid controlled valves.

ASSEMBLED MANIFOLDS

Valves and manifold stations can be assembled by ROSS to precise specifications. The assembly is then ready for integration into your system. For detailed information about such assemblies, consult your ROSS Distributor or call ROSS in the U.S.A. at 1-888-TEK-ROSS (835-7677) or 1-248-764-1800.

Manifold Bases Technical Data




For Pressure Controlled Valves


DIMENSIONS

Inches (mm)


ANSI Size 1 & 2.5

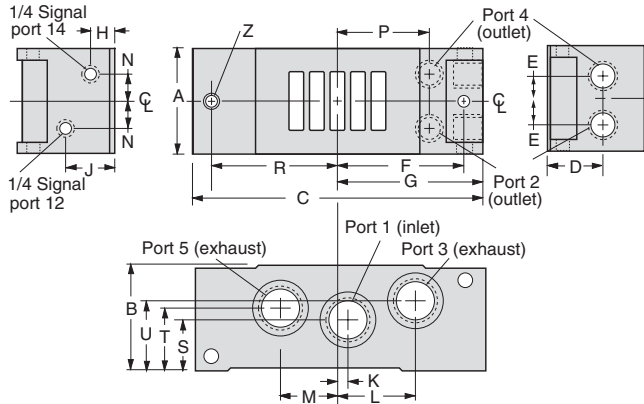

ANSI Size 4

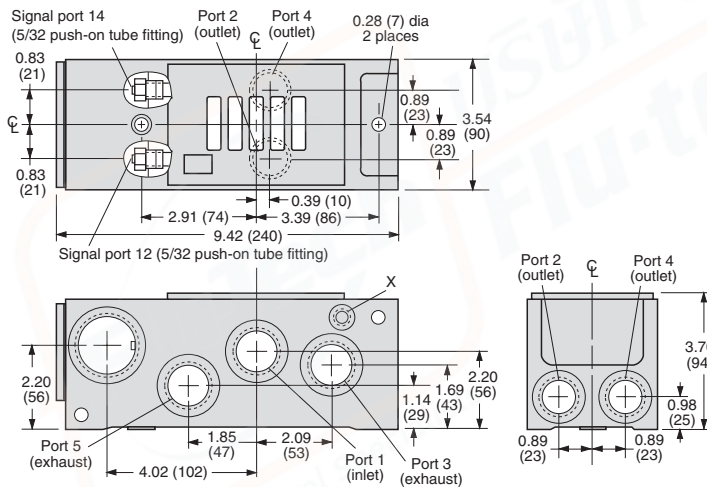

ANSI Size 10

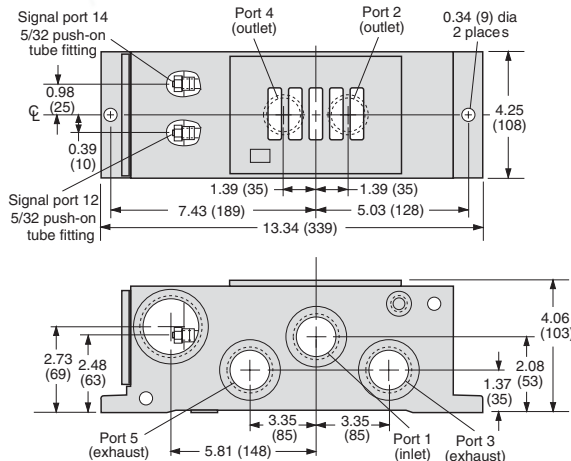

Dimensions inches (mm)		
	ANSI 1	ANSI 2.5
A	2.26 (57)	2.80 (71)
B	2.26 (57)	2.66 (68)
C	6.25 (159)	6.86 (174)
D	1.32 (34)	1.48 (38)
E	0.56 (14)	0.70 (18)
F	2.88 (73)	2.99 (76)
G	3.31 (84)	3.40 (86)
H	0.56 (14)	0.74 (19)
J	0.88 (22)	1.26 (32)
K	0.00 (00)	0.18 (6)
L	1.47 (37)	1.80 (46)
M	1.36 (35)	1.46 (37)
N	0.56 (14)	0.70 (18)
P	2.37 (60)	2.21 (56)
R	2.50 (64)	2.99 (76)
S	1.14 (29)	1.40 (36)
T	1.14 (29)	1.76 (45)
U	1.26 (32)	1.76 (45)
Z	0.28 (7)	0.28 (7)

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

Accessories & Options

SOLENOID PILOT OPTIONS

Manual Override Kits	Flush Button		Extended Button		Extended Button with Palm	
	Locking Type	Kit Number	Locking Type	Kit Number	Locking Type	Kit Number
	Non-Locking	790K87	Non-Locking	791K87	Non-Locking	984H87
Locking	792K87					

Flush flexible manual overrides are standard on solenoid pilot controlled valves with C_v ratings of 2.0 or larger. Both locking and non-locking metal override buttons are also available for these models.

Each of the override buttons in the kits at the right is made of metal and is spring-returned. The locking type button, however, can be kept in the actuated position by turning the slot in the top of the button with a screwdriver.

INTERPOSED PRESSURE REGULATORS

ANSI Size	Model Number		
	Single	Double	
		Solenoid	Remote Air
1	840C91	841C91	713C91
2.5	626C91	627C91	714C91
4	632C91	633C91	715C91

Both single and double interposed regulators are available for valves with C_v ratings up to 4.2. A regulator is bolted to the valve's sub-base or manifold station, and the valve is then bolted to the regulator. This mounting method allows the valve to be removed and replaced without disturbing the regulator.

Single pressure regulators provide the same regulated pressure at both outlet ports.
Double pressure regulators allow the pressure at each outlet port to be set independently.

A locking type knob is used to set the regulated pressure at any point in the range of:
5 to 100 psig (0.3 to 7 bar) for ANSI Size 1 and 2 models;
5 to 125 psig (0.3 to 8.5 bar) for ANSI Size = 4.2 models.

Maximum inlet pressure is 150 psig (10 bar).
Pressure gauge(s) included.

Warning Double interposed regulators will reverse output ports - the 12 solenoid will pressurize the 4 port, the 14 solenoid will pressurize the 2 port - which may cause unexpected, potentially dangerous cylinder movement at valve pressurization.

SILENCERS

Port Size	Thread Type	Model Number		Flow Avg. C_v	Pressure Range psig (bar)
		R/Rp Thread	NPT Thread		
1/4	Male	D5500A2003	5500A2003	2.1	0-290 (0-20) maximum
3/8	Male	D5500A3013	5500A3013	2.7	
		D5500A3003	5500A3003	4.3	
1/2	Male	D5500A4003	5500A4003	4.7	
3/4	Male	D5500A5013	5500A5013	5.1	
		D5500A5003	5500A5003	11.5	
1	Male	D5500A6003	5500A6003	14.6	
1-1/4	Male	D5500A7013	5500A7013	16.4	



บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270
845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th