



WWW.FLUTECH.CO.TH




LINE ADD FRIEND
@flutech.co.th

Authorized Distributor



บริษัท ฟลูเทค จำกัด
Flu-tech co.,ltd

Tuning Fork Level Switch

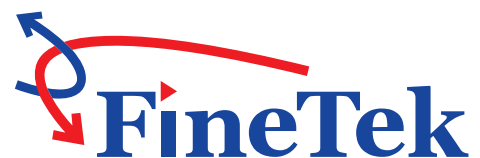

Innovation · Quality · Sharing

CATALOGUE

1. PRODUCT INTRODUCTION.....	1
2. PRODUCT SERIES(1)	
SC14 STANDARD TYPE.....	4
SC17 EX-PROOF TYPE.....	5
SC14 STANDARD TYPE / SC17 EX-PROOF TYPE DESCRIPTION OF FEATURES	6
SC14 STANDARD TYPE / SC17 EX-PROOF TYPE WIRING INSTRUCTIONS.....	7
SC14 STANDARD TYPE / SC17 EX-PROOF TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	8
SC14 STANDARD TYPE / SC17 EX-PROOF TYPE ORDER INFORMATION	9
3. PRODUCT SERIES(2)	
SC24 LITE-TYPE.....	11
SC24 LITE-TYPE DESCRIPTION OF FEATURES.....	12
SC24 LITE-TYPE WIRING INSTRUCTIONS.....	14
SC24 LITE-TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	16
SC24 LITE-TYPE ORDER INFORMATION.....	17
4. PRODUCT SERIES(3)	
SC35 TUNING FORK LEVEL SWITCH	18
SC35 TUNING FORK LEVEL SWITCH DESCRIPTION OF FEATURES.....	20
SC35 TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS	21
SC35 TUNING FORK LEVEL SWITCH MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	22
SC35 TUNING FORK LEVEL SWITCH ORDER INFORMATION.....	23
5. PRODUCT SERIES(4)	
SC28 MINI-TYPE.....	25
SC28 MINI-TYPE DESCRIPTION OF FEATURES.....	28
SC28 MINI-TYPE WIRING INSTRUCTIONS	30
SC28 MINI-TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	32
SC28 MINI-TYPE ORDER INFORMATION.....	33
6. PRODUCT SERIES(5)	
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH.....	35
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH DESCRIPTION OF FEATURES.....	37
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS.....	39
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	40
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH ORDER INFORMATION.....	41

PRODUCT INTRODUCTION

WORKING PRINCIPLE

The SC series is a vibrating tuning fork point level sensor that utilizes piezoelectric crystal and solidstate electronics technology to produce vibration in the tuning fork element at a specific frequency and receive electronic feedback. When the probe element is in contact with the target material, the vibration is dampened, the electronic feedback changes, and presence of the material is thereby sensed by the electronics which changes the state of the sensor output to indicate material presence. When the probe element is again free of the target material, the vibration again is produced and the output state reverts to indicate material absence.

FEATURE

- SPDT Relay output, SSR MOSFET output.
- Wide voltage supply range 20~250 Vac/Vdc,50/60Hz
- No frequent calibration required, easy-to-use, sturdy and durable design. High/low failure safe mode, safe and reliable.
- Sensitivity adjustment is available for different densities of media. Fine powder can be detected.
- Suitable for liquid, powder, and solid application.
- Dual insulation can reduce damage on the PCB board caused by great changes in temperature and humidity, as well as condensation effects (SC3□ series).
- It can be tested by pressing the test button after installation (SC3□ series).
- Output switch delay function (SC3□ series).
- Self-diagnosis mechanism can detect the abnormality such as the abrasion of the tuning fork or the material viscosity (SC3□ series).
- The compact built-in wiring box can save the installation space (SC3□ series).
- The wiring box can rotate 270 degrees, facilitating adjustment of the inlet direction (SC3□ series).
- The minimum measurable specific gravity can reach 0.01 g/cm³ (SC35 series).
- Ultra protection mechanism can set the secondary output contact point as alarm output (SC35 series).
- Support the function of detecting underwater sediments (SC35 series).
- All-in-one design, 3/4" (SC38), 1" thread is suitable for the installation of a small tube.
- Adjustment setting for different densities of media $P > 0.5 \text{ g/cm}^3$ or $\rho > 0.7 \text{ g/cm}^3$ (SC38).
- Switch delay setting function (SC3□ series).
- Alarm indicators based on failure status or output status selected according to the customer's habits (SC3□ series).
- Automatic calibration of the operation points for different densities of media as required by the customer (SC38).

APPLICABLE MATERIALS

The tuning fork level switch can be widely applied to detect the min. and max. level in tanks, silos and hoppers filled with materials of different densities and state. The following is a list of applications.

POWDER

- | | |
|------------------------|------------------------|
| 1. Powdered milk | 15. Pellets |
| 2. Frozen potato chips | 16. Peanuts |
| 3. Beans | 17. Tobacco |
| 4. Sugar | 18. Wood shavings |
| 5. Sweets | 19. Chalk |
| 6. Coffee beans | 20. Stearin chips |
| 7. Coffee powder | 21. Powdered cellulose |
| 8. Frozen dry coffee | 22. Glass fine power |
| 9. Tea | 23. Granular plastics |
| 10. Salt | 24. Gravel |
| 11. Flour | 25. Powdered clay |
| 12. Foundry sand | 26. Polystyrene powder |
| 13. Spices | 27. Styrofoam |
| 14. Animal food | 28. Soda |

LIQUID

1. Water & Solutions
2. General Purpose Solvent
3. Soy sauce
4. Heavy oil
5. Petroleum
6. Oil
7. Ink
8. Cream
9. Drink & Beverage
10. Corrosive liquid

APPLICATION SCOPE

It is applicable to the max. and min. level detection of the tanks or tubes filled with various solid/liquid media. The product has a variety of applications, such as in the chemical fiber industry, rubber industry, tire industry, cement industry, steel industry, food industry, pharmaceutical industry, and animal feed factories in terms of the level detection for the bins of the raw material/process/finished products.

APPLICATION EXAMPLE

Application situation	SC24	SC28	SC14X	SC17X	SC35X	SC38X
Liquid	★	★	★	★		★
Powder	★		★	★	★	
Solid					★	
Corrosive media			Optional			
Explosion proof				★	★	★
Tri-Clamp connection	Optional	Optional	Optional			Optional
Operation temp. 100°C	★	★				
Operation temp. 130°C			★	★		
Operation temp. 150°C					★	★
Operation temp. 280°C					★	
Max. pressure<25bar					★	
Max. pressure<40bar	★	★	★	★		★



PRODUCT DIMENSIONS

<p>SC24 Series tri clamp ferrule connection</p> <p>Standard type Extended type</p>	<p>SC28 Series tri clamp ferrule connection</p> <p>Standard type Ultra Extension type</p>
<p>SC14 Series tri clamp ferrule connection</p> <p>Standard type Extended type</p>	<p>SC38 Series tri clamp ferrule connection</p> <p>Standard type Ultra Extension type</p>
<p>SC14 Series flange connection</p> <p>L: As marked in spec. table L: By requested</p>	<p>SC38 Series flange connection</p> <p>L: As marked in spec. table L: By requested</p>

SC14 STANDARD TYPE

Dimensions (Unit:mm)			
Model No.	SC1400 Standard Type	SC1410 Tuning Fork Ultra Extension Type	SC1420 Tuning Fork Extension Type
Level sensor housing	Aluminum / IP65		
Probe material	SUS 304 / 316 / 316L		
Mounting	1"PT		
Conduit	1/2"NPT × 2		
Max. vertical load on rod.	177in.Lbs(20Nm)		
Process pressure.	-1~600PSI (40bar)		
Power supply	20~250Vac / Vdc,50 / 60Hz		
Power consumption	10VA		
Ambient temp.	-40°C~60°C		
Process temp.	-40°C~130°C		
Signal output	Relay, SPDT, 5A/250Vac, 1 set or 2 set SSR(MOSFET) 400mA/60 Vac / Vdc, 1 set or 2 set		
Min. material density sensed	Solid:≥0.07g/cm ³ , Liquid: ≥0.7g/cm ³		
Time delay	0.6 Second / Operate; 1~3 Seconds / Reset		
Vibrating frequency.	350~370Hz		
Selectable Fail-safe	Hi. / Lo.		
Selectable sensitivity	Hi. / Lo.		

SC17 EX-PROOF TYPE

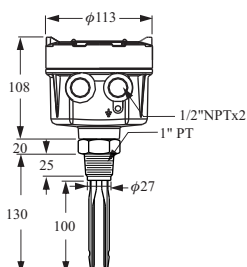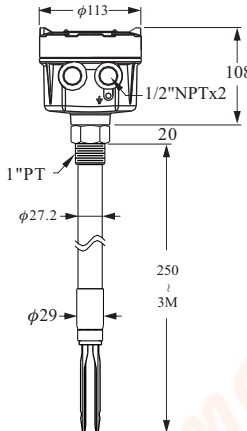
Dimensions (Unit:mm)		
Model No.	SC1740 Standard Type	SC1741 Tuning Fork Ultra Extension Type
Level sensor housing	Aluminum / IP65	
Probe material	SUS 304 / 316 / 316L	
Mounting	1"PT	1"PT
Conduit	1/2"NPT × 2	
Max. vertical load on rod.	177in.Lbs(20Nm)	
Process pressure.	-1~600PSI (40bar)	
Power supply	20~250,50/60Hz Vac/Vdc	
Power consumption	10VA	
Ambient temp.	-20°C~70°C	
Process temp.	-40°C~125°C	
Signal output	Relay, SPDT, 3A / 250Vac, 1 set or 2 set SSR(MOSFET) 400mA/60 Vac / Vdc, 1 set or 2 set	
Min. material density sensed	Solid: ≥0.07g/cm ³ , Liquid: ≥0.7g/cm ³ , viscosity : 1~10000 cSt	
Time delay	0.6 Second / Operate; 1~3 Seconds / Reset	
Vibrating frequency.	350~370Hz	
Selectable Fail-safe	Hi. / Lo.	
Selectable sensitivity	Hi. / Lo.	

SC14 STANDARD TYPE / SC17 EX-PROOF TYPE

DESCRIPTION OF FEATURES


FORK TRIGGER POINT

SC14/SC17 fork trigger point is shown as below figure.
The testing medium is water(S.G.=1 g/cm³),
and its trigger point is about 23mm from the fork tip.
If testing medium with S.G (specific gravity) lower than
1g/cm³ (water), the trigger point would increase.
Similarly, the trigger point will downward while the S.G
is large than water.

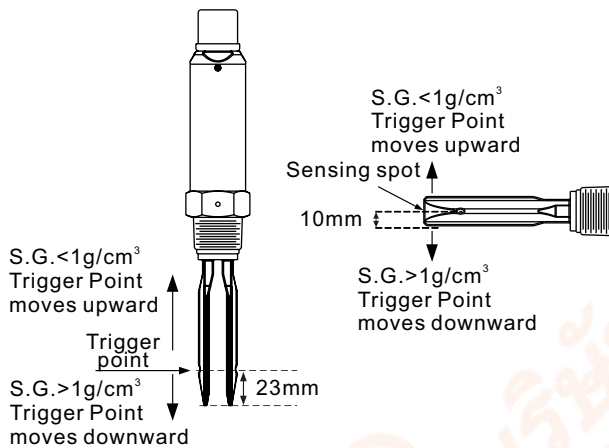



SC14 STANDARD TYPE / SC17 EX-PROOF TYPE WIRING INSTRUCTIONS

SC14XX, SC174X



Relay output type(SPDT)

SSR(MOSFET) output type



Relay output type (DPDT)

SSR(MOSFET) output type



FUNCTIONAL DESCRIPTION

Description of terminal functions

- L+, N-: Power Supply
- NC, COM, NO: Relay Output
- RT1, RT2: Remote-Test
- : Ground Connection
- COM1, NO1 : SSR(MOSFET) Output
- COM2, NO2 : The second set of SSR (MOSFET) output (Optional)

DESCRIPTION OF PANEL FUNCTIONS

- PWR: Power Supply (Green Light)
- SIGNAL: Output Indication (Red Light)
- FSH: Power On. The signal lamp is on and the relay is conductive. While the tuning fork switch senses the material, the signal lamp is off and relay is not conductive.
- FSL: Power On. The signal lamp is off and the relay is not conductive. While the tuning fork switch senses the material, the signal lamp is on and relay is conductive.
- SENSITIVITY L: Low Sensitivity
- SENSITIVITY H: High Sensitivity

FAIL-SAFE HIGH / LOW PROTECTION

FSH (Fail-Safe High) Protection:

Switch to FSH mode.

Normal Status: The signal lamp is on. It indicates that the tuning fork switch does not sense the material and the relay is conductive.

Failure: When the power shuts down, the signal lamp is off. It indicates that the tuning fork switch is voided and the relay is not conductive.

FSL (Fail-Safe Low) Protection:

Switch to FSL mode.

Normal Status: The signal lamp is on.

The tuning fork switch senses the material and the relay is conductive.

Failure: When the power shuts down, the signal lamp is off. The tuning fork switch is voided and the relay is not conductive.

SENSITIVITY ADJUSTMENT

The SENSITIVITY is located on the right side of the panel. Minor adjustment can be made by rotating the sensitivity up to 22 turns using a small screw driver. Rotating clockwise will increase sensitivity; rotating counter-clockwise will decrease sensitivity.

The sensitivity is originally set at max. value. The switching point is at 15mm from the tip of the tuning fork. The switching point position will be changed by the sensitivity value. If the sensitivity adjusts to lower value, the switching point position is moving backward; if the sensitivity adjusts to high value, the switching point position is moving forward. User may change the switching point position by adjusting the sensitivity. The changing range of switching point is about 60mm. For example, if the switching point needs to be moved backward by 30mm, the user needs to adjust SENSITIVITY counter-clockwise by 10 turns. In general cases, there is no need for sensitivity adjustment.

	FSL		FSH	
Level				
Contact form	NO COM NC	NO COM NC	NO COM NC	NO COM NC
Indication				
Status	Fail	Normal	Normal	Fail

SC14 STANDARD TYPE / SC17 EX-PROOF TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC1400	SCX10000-AAB
SC1410	SCX10000-CAB
SC1420	SCX10000-BAB
SC1740	SCX1001C-AAB
SC1741	SCX1001C-CAB



SC14 STANDARD TYPE / SC17 EX-PROOF TYPE ORDER INFORMATION

	05	06	07	08	09	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
SCX1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	A B	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
05 06 Model																				
00: Standard																				
03: Sanitary																				
07 08 Certification																				
00: None																				
1C: ATEX-Ex d																				
2C: IECEx-Ex d																				
7C: NEPSI-Ex d																				
5C: TS-Ex d																				
09 Construction																				
A: Standard																				
B: Extension type																				
C: Ultra extension type																				
D: Cable type																				
E: Anti-Corrosion probe type																				
F: Anti-Corrosion extension probe type																				
G: Sanitary joint type																				
12 Power supply																				
C: 20~250Vac/Vdc, 50/60Hz ; Relay O/P - Euro terminal																				
D: 20~250Vac/Vdc, 50/60Hz ; SSR(MOSFET) - Euro terminal																				
E: 20~250Vac/Vdc, 50/60Hz ; Relay O/P*2 - Euro terminal																				
F: 20~250Vac/Vdc, 50/60Hz ; SSR(MOSFET)*2 - Euro terminal																				
Connection																				
13 14																				
Flange																				
AK: JIS-FF																				
AN: ANSI-RF																				
AS: DIN-FF																				
AI: 3A																				
Thread																				
AA: JIS																				
AC: ANSI																				
15 16																				
A8: 1"																				
A9: 1-1/4"																				
B1: 1-1/2"																				
B2: 2"																				
B4: 2-1/2"																				
B5: 3"																				
B7: 4"																				
D8: DN25																				
E1: DN40																				
17 18																				
01: PT male																				
03: PF male																				
07: NPT male																				
40: 5 kg/cm ²																				
42: 10 kg/cm ²																				
48: 150 Lbs																				
49: 300 Lbs																				
57: PN10																				
58: PN16																				

(Next page)

SC14 STANDARD TYPE / SC17 EX-PROOF TYPE ORDER INFORMATION

SCX1 ⁰⁵ ⁰⁶ ⁰⁷ ⁰⁸ - ⁰⁹ A B ¹² ¹³ ¹⁴ ¹⁵ ¹⁶ ¹⁷ ¹⁸ ¹⁹ ²⁰ ²¹ ²² ²³ ²⁴ ²⁵ ²⁶

¹⁹ ²⁰ **Probe material** _____

MA: SUS304
MB: SUS316
MC: SUS316L

²¹ ²² **Coating material** _____

00: None
14: PFA
34: ECTFE
※ Coating length max. 400mm

²³ ²⁴ ²⁵ ²⁶ **Probe length** _____

Code	Probe length
0130~3000	130~3000mm
0105~0250	105~250mm

SC24 LITE-TYPE


Dimensions (Unit:mm)			
Model no.	SC24□□□ DIN Connector	SC24□□□ M12 Connector	SC24□□□ Cable Wire Type
Supply voltage & output	SC240□□: 20~250Vac / Vdc 2 Wire Contactless electronic switch. SC24P□□: 12~55Vdc 3 Wire PNP output. SC24N□□: 12~55Vdc 3 Wire NPN output.		
Fork length	100mm		
Ambient temp.	-40~85°C		
Ambient humidity	80% RH non-condensed		
Process temp.	SC24□□□T: -40~+150°C SC24□□□: -40~+100°C		
Process pressure	Maximum 40 bar		
Min. material density sensed	Solid: density: $\geq 0.07\text{g/cm}^3$ Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt		
Magnetic testing	Output function test performed by putting magnets near the indicated spot		
Vibrating frequency	350~370Hz		
Status indication	Green light: indicate power supply Red light: indicate operating mode		
Housing material	SUS304		
Probe material	SUS304, SUS316, SUS316L		
IP protection	IP65	IP67	IP67
Mounting	1" more		
Conduit	Valve plug DIN 43650	M12 Connector(180° / 90°)	Cable connector

SC24 LITE-TYPE DESCRIPTION OF FEATURES

FORK TRIGGER POINT


SC24 fork trigger point is shown as below figure.

The testing medium is water ($S.G.=1 \text{ g/cm}^3$), and its trigger point is about 23mm from the fork tip. If testing medium with S.G (specific gravity) lower than 1g/cm^3 (water), the trigger point would increase. Similarly, the trigger point will downward while the S.G is large than water.

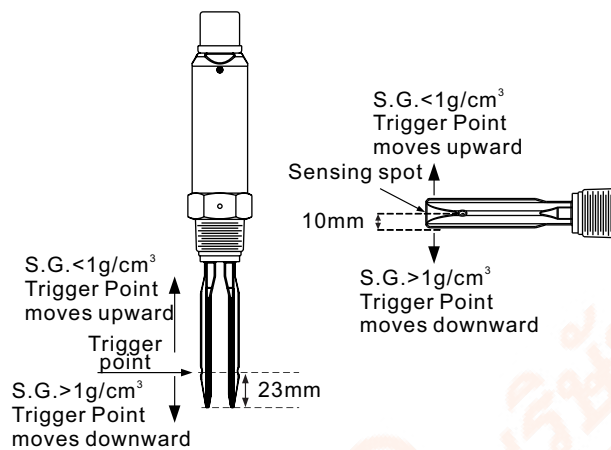

MAGNETIC TEST

After the switch is installed and powered, magnetic test function can be performed accordingly. The testing point is marked on the housing label. User holds the magnet and moves it close to testing point, the output status will switch from NO. to NC. or NC to NO. and red LED would switch ON or OFF while fork continues to vibrate. When magnet is pulled away from the testing point, the output status and red LED would return as default while fork continues to vibrate. The purpose of testing is to confirm the wiring and functioning are correct.

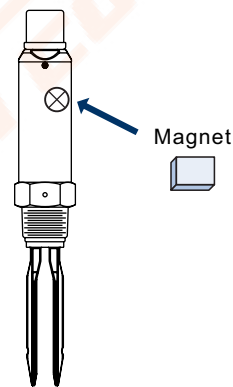

SC24 LITE-TYPE DESCRIPTION OF FEATURES

OUTPUT STATUS FOR RELAY

- Low (Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Relay is on NO status and red LED indication is off. When tuning fork is covered by testing medium, the vibration will stop and relay becomes NC status. Red LED indication then is on.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while the power on. Relay is on NC status and red LED indication is on. When tuning fork covered by testing medium, the vibration stops and relay becomes NO status. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
Contactless electronic switch	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED					

It represents Blinking

OUTPUT STATUS FOR PNP / NPN TRANSISTOR

DIN & Cable type

- Low(Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NO status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NC status. Red LED indication is off.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NC status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NO status. Red LED indication is off.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

M12 x 4Pin type

- Low(Min.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NO and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NC. Red LED indication is on.
- High(Max.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NC and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NO. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
PNP/NPN Output	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED (DIN& Cable)					
Red LED (M12x 4Pin)					

It represents Blinking

SC24 LITE-TYPE WIRING INSTRUCTIONS

SC240X(TWO WIRES) WIRING


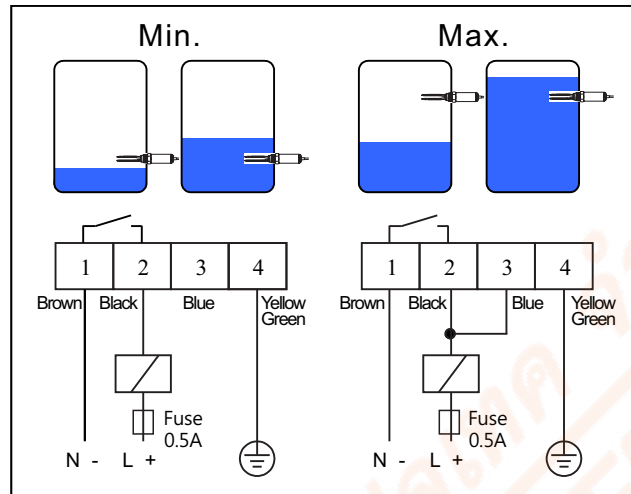


Figure 1 Two Wires Wiring

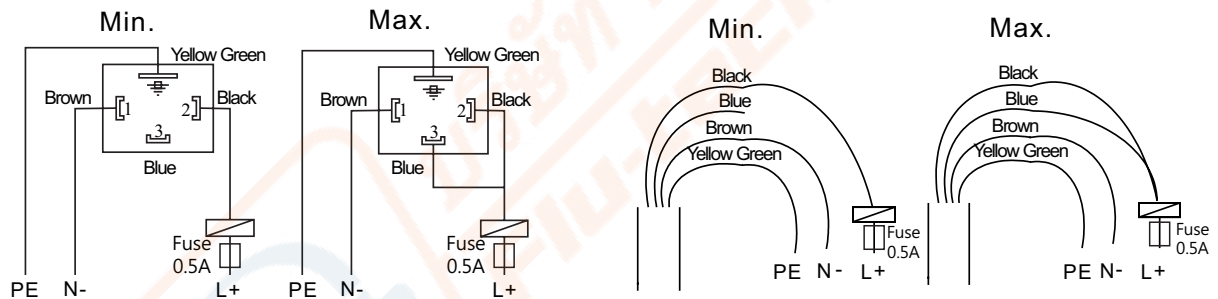

DIN Wiring Diagram

M12x4Pin - Cable Wiring Diagram

WIRING

Power can be AC/DC switching. Two wires are connected with terminals (L+/N-) as in Figure 1.

■ Low (Min.) mode:

Pin 1 (Brown) is connected to N-. Pin 2 (Black) is connected to L+ with relay. Pin 4 (Yellow Green) connects to tank ground.

■ High (Max.) mode:

Pin 1 (Brown) is connected to N-. Pin 3 is connected to pin 2 (Black) to L+ with Relay . Pin 4 (Yellow Green) connects to tank ground.

SC24 LITE-TYPE WIRING INSTRUCTIONS

SC24P/N(THREE WIRES) WIRING

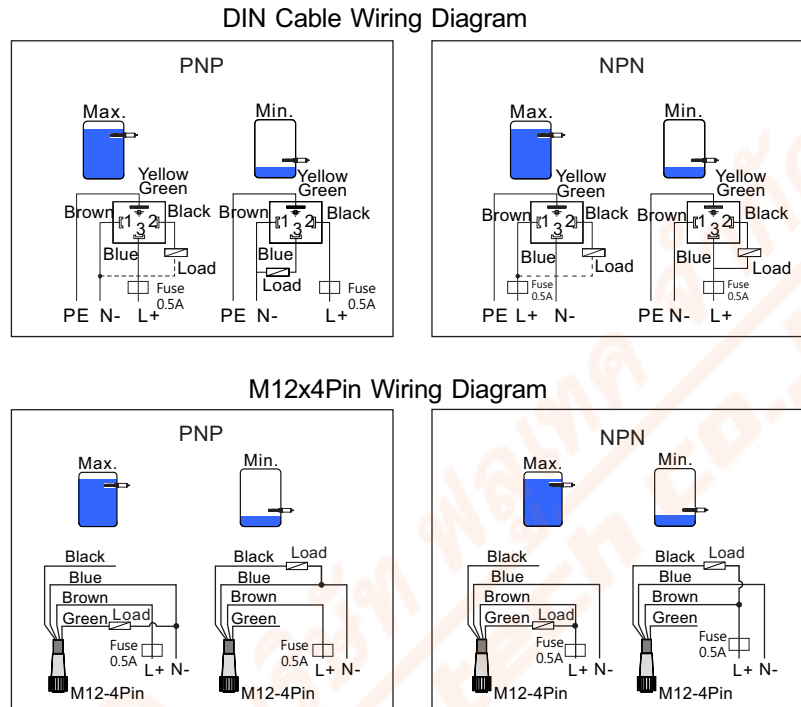


Figure 2 PNP / NPN Output Wiring Diagram

WIRING

Power supply is for DC only. Output is PNP / NPN and high / low level alarm. Please see Figure 2.

► DIN & Cable Wiring

PNP Output

- High (Max.) Mode: Pin 1(Brown) connects to N-. Pin 3 (Blue) connects to L+. To output, it is pin 2. (Black) connects to N- with relay. Pin 4 (Yellow Green) connects to tank ground.
- Low (Min.) Mode: Pin 1 (Brown) connects to N-. Pin 2 (Black) connects to L+. To output, Pin 3 (Blue) connects to N- with relay. Pin 4 (Yellow Green) should contact to tank ground.

NPN Output

- High (Max.) Mode: Pin 1 (Brown) connects to L+. Pin 3 (Blue) connects to N-. To output, Pin 2 (Black) connects to L+ with relay. Pin 4(Yellow Green) should contact to tank ground.
- Low(Min.)Mode: Pin1 (Brown) connects to N-. Pin 3 (Blue) connects to L+. To output Pin 2 (Black) connects to L+ with relay. Pin 4 (Yellow Green) should contact To tank ground.

► M12 x 4Pin Wiring:

PNP Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin(Green), then connected to N-.
- Low(Min.) Mode: number 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to N-.

NPN Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin(Green), then connected to L+.
- Low(Min.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to L+.

SC24 LITE-TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC2400	SCX2□□00-□BA
SC240□□T	SCX20200-□BA
SC24P□	SCX2□□00-□BP
SC24N□	SCX2□□00-□BN



SC24 LITE-TYPE ORDER INFORMATION

SCX2		05	06	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
Model																													
00: Standard		02: Hi-temperature																											
Construction																													
A: Standard		B: Extension type																											
Fork length																													
B: 100mm																													
Power supply																													
A: 20~250Vac/Vdc, 50/60Hz; 2 wire Contactless electronic switch																													
P: 12~55Vdc ; 3 Wire PNP output.																													
N: 12~55Vdc ; 3 Wire NPN output.																													
Connection																													
12 13		14 15		16 17																									
Flange		A8: 1"		01: PT male																									
AK: JIS-FF		A9: 1-1/4"		03: PF male																									
AN: ANSI-RF		B1: 1-1/2"		07: NPT male																									
AS: DIN-FF		B2: 2"		40: 5 kg/cm ²																									
AI: 3A		B4: 2-1/2"		42: 10 kg/cm ²																									
Thread		B5: 3"		48: 150 Lbs																									
AA: JIS		B7: 4"		49: 300 Lbs																									
AC: ANSI		D8: DN25		57: PN10																									
		E1: DN40		58: PN16																									
18 19 Probe material																													
MA: SUS304																													
MB: SUS316																													
MC: SUS316L																													
20 Connection																													
A: M12x1(180°)		C: Cable																											
B: M12x1(90°)		D: DIN 43650																											
※M12x1 with Cable, standard cable length 2M, PVC 24AWG																													
21 22 23 24 Probe length																													
Code		Probe length																											
0130~0250		130~250mm																											

SC35 TUNING FORK LEVEL SWITCH

NEPSI Ex tD A21 IP66/67 T85~T300°C
IECEX Ex ta IIIC T95°C / T130°C / T136°C Da
Ex tb IIIC T80°C / T95°C / T130°C / T160°C / T240°C / T290°C Db

Dimensions (Unit:mm)			
Model No.	SC350 Standard Type	SC351 Extension Type	SC352 Cable Type
Level sensor housing	Built-in box, aluminum coating IP66/IP67		
Probe material	SUS 304 / 316 / 316L		
Power supply	19 ~253 Vdc / Vac, 50/60 Hz ; NPN / PNP(10~55Vdc)		
Probe construction	Max. 1.5 W		
Voltage endurance capability	3.7 kV		
Overvoltage protection	overvoltage category II		
Ambient temp.	-40~85 °C		-40~75 °C
Process temp.	-40~150 °C	-40~150 °C	-40~80 °C
Material density	$\geq 0.01 \text{ g/cm}^3$ or $\geq 0.05 \text{ g/cm}^3$		
Measuring frequency	140 Hz \pm 5 Hz		
Material dimension	Max.10 mm		
Conduit	1/2"PF / 1/2"NPT(Ex-proof type only supports 1/2"NPT)		
External diameter of conduit cable	$\phi 6 \sim \phi 10 \text{ mm}$		
Process pressure	Max.25 bar		Max. 2 bar
Output signal	2 sets of SPDT relay output / 2 sets of transistor output / 3 wires NPN/PNP transistor output		
Contact capacity	Relay: 6A / 250Vac , 6A / 28Vdc ; Transistor: 350mA , 60Vac / Vdc NPN / PNP / Transistor: 350mA , 55Vdc		

SC35 TUNING FORK LEVEL SWITCH


NEPSI Ex tD A21 IP66/67 T85~T300°C
IECEX Ex ta IIIC T95°C / T130°C / T136°C Da
Ex tb IIIC T80°C / T95°C / T130°C / T160°C / T240°C / T290°C Db

Dimensions (Unit:mm)		
Model No.	SC350 High-temp. Type	SC351 High-temp. Extension Type
Level sensor housing	Built-in box, aluminum coating IP66/IP67	
Probe material	SUS 304 / 316 / 316L	
Power supply	19 ~253 Vdc / Vac, 50/60 Hz	
Probe construction	Max. 1.5 W	
Voltage endurance capability	3.7 kV	
Overvoltage protection	overvoltage category II	
Ambient temp.	-40~85 °C	
Process temp.	-40~280 °C	
Material density	$\geq 0.01 \text{ g/cm}^3$ or $\geq 0.05 \text{ g/cm}^3$	
Measuring frequency	140 Hz \pm 5 Hz	
Material dimension	Max.10 mm	
Conduit	1/2"PF / 1/2"NPT(Ex-proof type only supports 1/2"NPT)	
External diameter of conduit cable	$\phi 6 \sim \phi 10 \text{ mm}$	
Process pressure	Max. 25 bar	
Output signal	2 sets of SPDT relay output / 2 sets of transistor output	
Contact capacity	Relay: 6A / 250Vac , 6A / 28Vdc Transistor: 350mA , 60Vac / Vdc	

SC35 TUNING FORK LEVEL SWITCH

DESCRIPTION OF FEATURES

PANEL INTRODUCTION

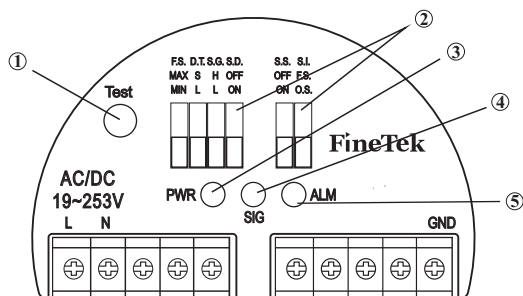


- ①: Test button
- ②: Function adjustment button
- ③: Power indicator
- ④: Status indicator
- ⑤: Alarm indicator



Abbreviation	Function	Option description	Remarks
Test	Test button	Reverse output signal	Reverse output signal can be used to provide a method for testing control equipment which is connected to sensor output
F.S.	Fail-Safe	MAX: High MIN: Low	Includes high low fail-safe mode
D.T.	Delay Time	S: General setting L: Delay of 5 seconds	Material covered: 0.5s Material not covered: 150°C: ≤1.5s 230°C / 280°C: ≤2s L sets delay of 5s for covered/uncovered
S.G.	Specific Gravity	H: ≥0.05 g/cm³ L: ≥0.01 g/cm³	High Density >0.05 g/cm³ Low Density >0.01 g/cm³
S.D.	Self Diagnosis	OFF: Disabled ON: Enabled	ON setting allows the sensor to detect fork abrasion or material build-up; SIG LED will flash if trouble exists
S.S.	Super Switch	OFF: Disabled ON: Enabled	When set ON Output 2 will be dedicated to indicate self-diagnostics alarm exists
S.I.	Signal Indication	F.S.: Fail-Safe mode O.S.: Output status mode	F.S. (fail safe) selected = Normal / Alarm status; O.S. (relay output status) selected = Relay energized (on) or de-energized (off)

SEDIMENT DETECTION

- It is only used to detect the sediment under the water, but can't be used for the level detection of the liquid or the doped liquid.
- S.G. (Specific Gravity) shall be adjusted to H position.
- S.D. (Self Diagnosis) shall be switched to OFF position.
- SC352 cable type is inapplicable to this working environment

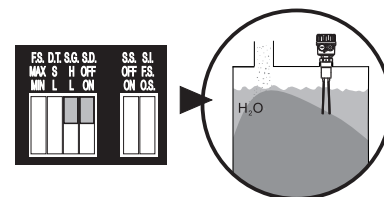

ENVIRONMENT/PROCESS TEMPERATURE LIMITATION

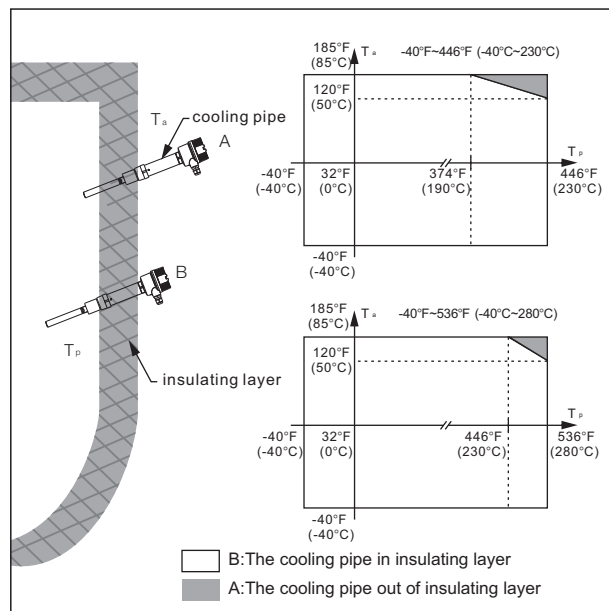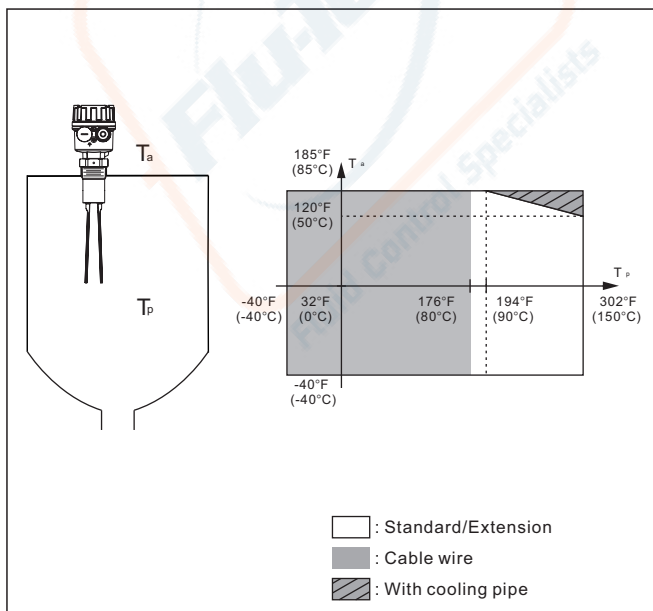


- ※ ETFE coating: T_p max. = 150°C
- ※ PTFE coating: T_p max. = 230°C

SC35 TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS

WIRING CONFIGURATION DIAGRAM AND INTRODUCTION OF FEATURES


Dual-relay output

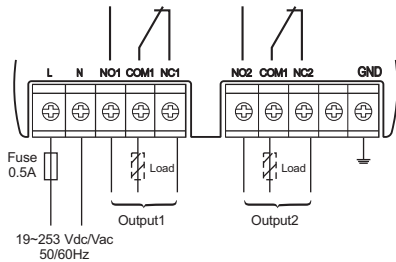

Load: External load
 $U \sim \text{max. } 250\text{Vac}@I_L \sim \text{max. } 6\text{A}$
 $U \sim \text{max. } 28\text{Vdc}@I_L \sim \text{max. } 6\text{A}$

Failure mode	Material level	Output signal			LED indicators		
		output1	output2		Power	Status	Alarm
			S.S. OFF	S.S. ON	Green	Yellow	Red
MAX						O.S. F.S.	
						O.S. F.S.	
MIN						O.S. F.S.	
						O.S. F.S.	
Viscous material		Maintain the previous state				O.S. F.S.	
Wear of tuning fork							

Dual-transistor output

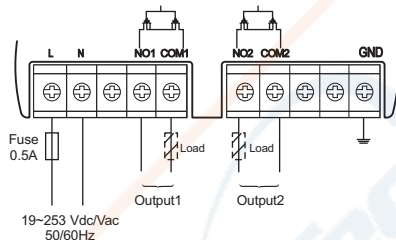

Load: External load
 $U \sim \text{max. } 60\text{Vac}@I_L \sim \text{max. } 350\text{mA}$
 $U \sim \text{max. } 60\text{Vdc}@I_L \sim \text{max. } 350\text{mA}$
 ※ External load R must be connected

Failure mode	Material level	Output signal			LED indicators		
		output1	output2		Power	Status	Alarm
			S.S. OFF	S.S. ON	Green	Yellow	Red
MAX						O.S. F.S.	
						O.S. F.S.	
MIN						O.S. F.S.	
						O.S. F.S.	
Viscous material		Maintain the previous state				O.S. F.S.	
Wear of tuning fork							
Output1>350mA			Maintain the previous state				
Output2>350mA		Maintain the previous state					
Output1 & Output2>350mA							

※ When output is off, there will be no error current status

: ON : Flash : OFF

: Relay ON : Relay OFF I_L : Load current

SC35 TUNING FORK LEVEL SWITCH MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC350	SCX3□□□□-EC(HC,JC)
SC351	SCX3□□□□-FC(IC,KC)
SC352	SCX3□□□□-DC



SC35 TUNING FORK LEVEL SWITCH

ORDER INFORMATION

	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28		
SCX3																										
05 06 Model																										
00: Standard (Construction: A, B, D)																										
02: High temperature (Construction: E, F)																										
08: High temperature (Construction: H, I)																										
09: High temperature type 2 (Construction: J, K)																										
07 08 Certification																										
01: None; 1/2" PF																										
02: None; 1/2" NPT																										
03: None; M20x1.5																										
2D: IECEEx-Ex t; 1/2"NPT																										
5D: TS-Ex t; 1/2" NPT																										
7B: NEPSI-Ex ia; 1/2" NPT																										
7D: NEPSI-Ex d; 1/2" NPT																										
09 Construction																										
A: Standard (150°C @ 50°C)																										
B: Extension type (150°C @ 50°C)																										
D: Cable type (80°C)																										
E: High temperature general type (150°C @ 85°C)																										
F: High temperature extension type (150°C @ 85°C)																										
H: High temperature type (230°C)																										
I: High temperature extension type (230°C)																										
J: High temperature type 2 (280°C)																										
K: High temperature extension type 2 (280°C)																										
10 Fork length																										
C: 155mm																										
11 Housing																										
F: Aluminum																										
R: Stainless steel (No explosion protection)																										
12 Housing cover																										
A: No Lens																										
B: Lens(Only stainless steel)																										

(Next page)

⑬ Power supply

Connection

AC: ANSI

58: PN16





MC: SUS316L

※Coating length max. 400mm





A: $Ra \leq 3.2\mu m$

Code	Probe length
0225~4000	225~4000mm
0750~A200	750~20000mm

SC28 MINI-TYPE

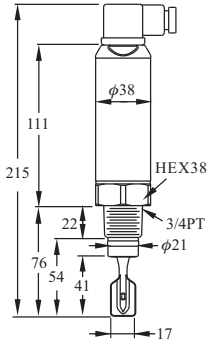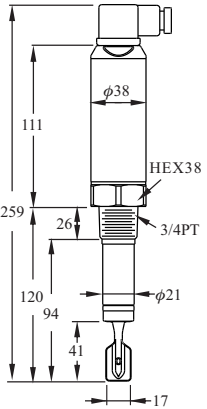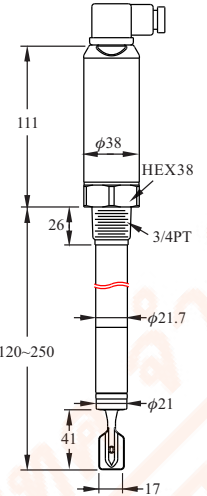Dimensions (Unit:mm)	 <p>Standard Type</p>	 <p>Extension Type</p>	 <p>Ultra Extension Type</p>	 <p>Side View</p>
Model no.	SC28□□□ DIN Connector			
Supply voltage & output	SC280□: 20~250 Vac / Vdc, 50/60Hz 2 wire Contactless electronic switch. SC28P□□: 12~55Vdc 3wire PNP output; SC28N□□: 12~55Vdc 3wire NPN output.			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Ambient humidity	SC28□□□: -40°C~100°C SC28□□□T: -40°C~150°C			
Process temp.	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm 10\%$			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP65			
Mounting	3/4" more			
Conduit	Valve plug DIN 43650			

SC28 MINI-TYPE

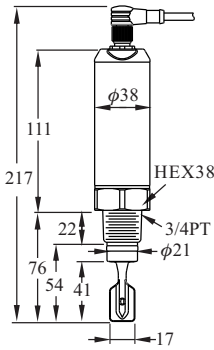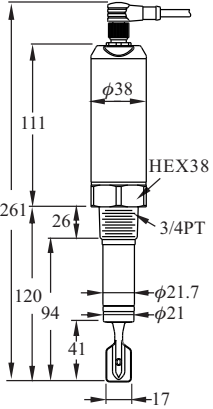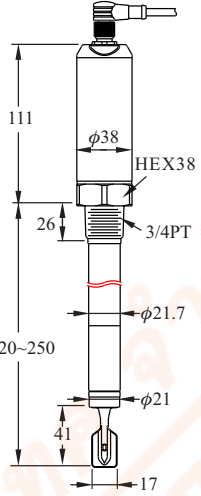Dimensions (Unit:mm)	 <p>Standard Type</p>	 <p>Extension Type</p>	 <p>Ultra Extension Type</p>	 <p>Side View</p>
Model no.	SC28□□□ M12 Connector			
Supply voltage & output	SC280□: 20~250 Vac / Vdc, 50/60Hz 2 wire Contactless electronic switch. SC28P□□: 12~55Vdc 3wire PNP output; SC28N□□: 12~55Vdc 3wire NPN output.			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Ambient humidity	SC28□□□: -40°C~100°C SC28□□□T: -40°C~150°C			
Process temp.	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm 10\%$			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP67			
Mounting	3/4" more			
Conduit	M12 Connector(180° / 90°)			


SC28 MINI-TYPE

Dimensions (Unit:mm)	<p>Standard Type</p>	<p>Extension Type</p>	<p>Ultra Extension Type</p>	<p>Side View</p>
Model no.	SC28□□□ Cable Wire Type			
Supply voltage & output	SC280□: 20~250 Vac / Vdc, 50/60Hz 2 wire Contactless electronic switch. SC28P□□: 12~55Vdc 3wire PNP output; SC28N□□: 12~55Vdc 3wire NPN output.			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Ambient humidity	SC28□□□: -40°C~100°C SC28□□□T: -40°C~150°C			
Process temp.	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm 10\%$			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP67			
Mounting	3/4" more			
Conduit	Cable connector			

SC28 MINI-TYPE DESCRIPTION OF FEATURES

MAGNETIC TEST

After the switch is installed and powered, magnetic test function can be performed accordingly. The testing point is marked on the housing label. User holds the magnet and moves it close to testing point, the output status will switch from NO. to NC. or NC to NO. and red LED would switch ON or OFF while fork continues to vibrate. When magnet is pulled away from the testing point, the output status and red LED would return as default while fork continues to vibrate. The purpose of testing is to confirm the wiring and functioning are correct.



SC28 MINI-TYPE DESCRIPTION OF FEATURES

OUTPUT STATUS FOR RELAY

- Low (Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Relay is on NO status and red LED indication is off. When tuning fork is covered by testing medium, the vibration will stop and relay becomes NC status. Red LED indication then is on.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while the power on. Relay is on NC status and red LED indication is on. When tuning fork covered by testing medium, the vibration stops and relay becomes NO status. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
Contactless electronic switch					
Red LED					

It represents Blinking

OUTPUT STATUS FOR PNP / NPN TRANSISTOR

DIN & Cable type

- Low(Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NO status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NC status. Red LED indication is off.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NC status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NO status. Red LED indication is off.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

M12 x 4Pin type

- Low(Min.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NO and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NC. Red LED indication is on.
- High(Max.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NC and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NO. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
PNP/NPN Output					
Red LED (DIN& Cable)					
Red LED (M12x 4Pin)					

It represents Blinking

SC28 MINI-TYPE WIRING INSTRUCTIONS

SC280(TWO WIRES) WIRING


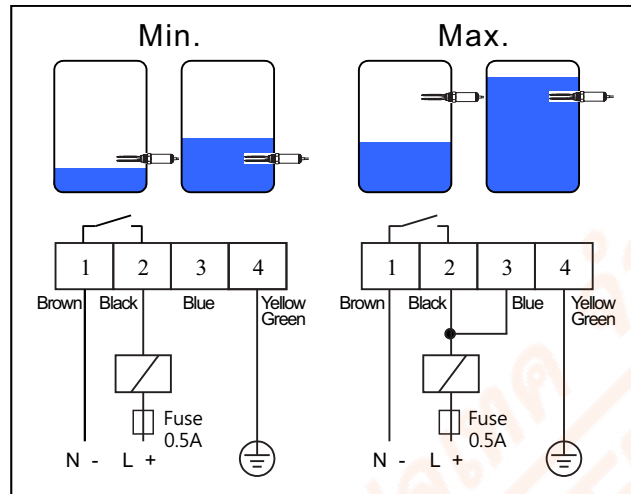


Figure 1 Two Wires Wiring

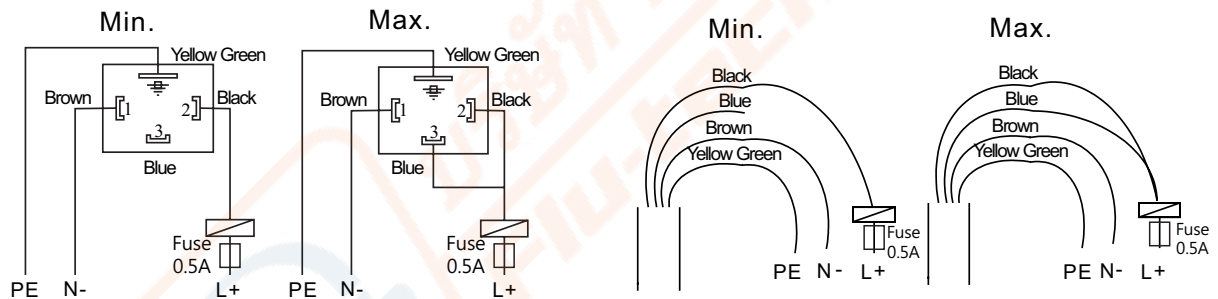

DIN Wiring Diagram

M12x4Pin Cable Wiring Diagram

Wiring

Power can be AC/DC switching. Two wires are connected with terminals (L+/N-) as in Figure 1.

■ Low (Min.) mode:

Pin 1 (Brown) is connected to N-. Pin 2 (Black) is connected to L+ with relay. Pin 4 (Yellow Green) connects to tank ground.

■ High (Max.) mode:

Pin 1 (Brown) is connected to N-. Pin 3 is connected to pin 2 (Black) to L+ with Relay. Pin 4 (Yellow Green) connects to tank ground.

SC28 MINI-TYPE WIRING INSTRUCTIONS

SC28P/N (THREE WIRES) WIRING

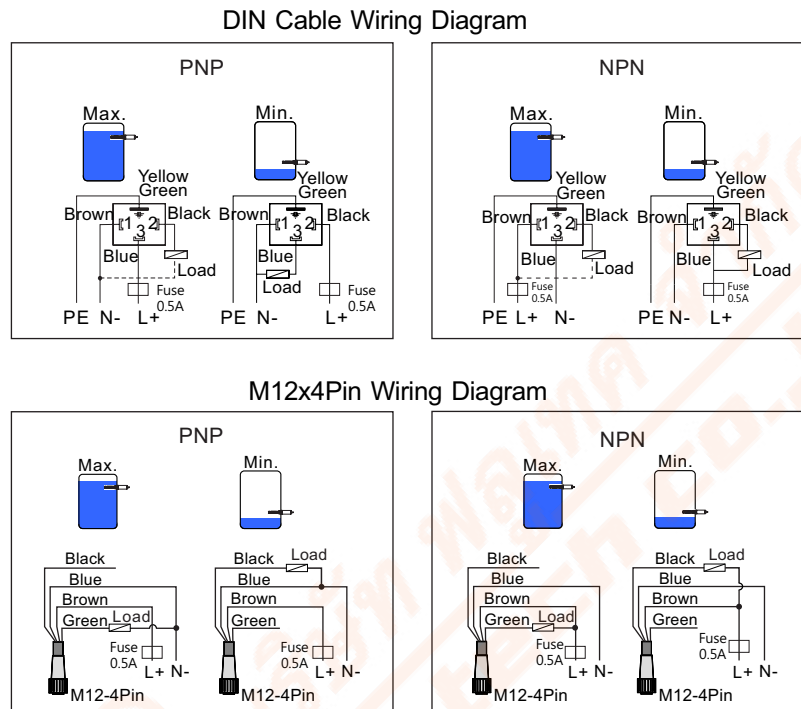


Figure 2 PNP / NPN Output Wiring Diagram

Wiring

Power supply is for DC only. Output is PNP / NPN and high / low level alarm. Please see Figure 2.

► DIN & Cable Wiring

PNP Output

- High (Max.) Mode: Pin 1(Brown) connects to N-. Pin 3 (Blue) connects to L+. To output, it is pin 2. (Black) connects to N- with relay. Pin 4 (Yellow Green) connects to tank ground.
- Low (Min.) Mode: Pin 1 (Brown) connects to N-. Pin 2 (Black) connects to L+. To output, Pin 3 (Blue) connects to N- with relay. Pin 4 (Yellow Green) should contact to tank ground.

NPN Output

- High (Max.) Mode: Pin 1 (Brown) connects to L+. Pin 3 (Blue) connects to N-. To output, Pin 2 (Black) connects to L+ with relay. Pin 4(Yellow Green) should contact to tank ground.
- Low(Min.)Mode: Pin1 (Brown) connects to N-. Pin 3 (Blue) connects to L+. To output Pin 2 (Black) connects to L+ with relay. Pin 4 (Yellow Green) should contact To tank ground.

► M12 x 4Pin Wiring:

PNP Output


- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin(Green), then connected to N-.
- Low(Min.) Mode: number 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to N-.

NPN Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin(Green), then connected to L+.
- Low(Min.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to L+.

SC28 MINI-TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC280□□	SCX50000-□AC□T
SC28P□□	SCX50000-□AC□P
SC28N□□	SCX50000-□AC□N
SC280□□T	SCX50200-□AC□T
SC28P□□T	SCX50200-□AC□P
SC28N□□T	SCX50200-□AC□N

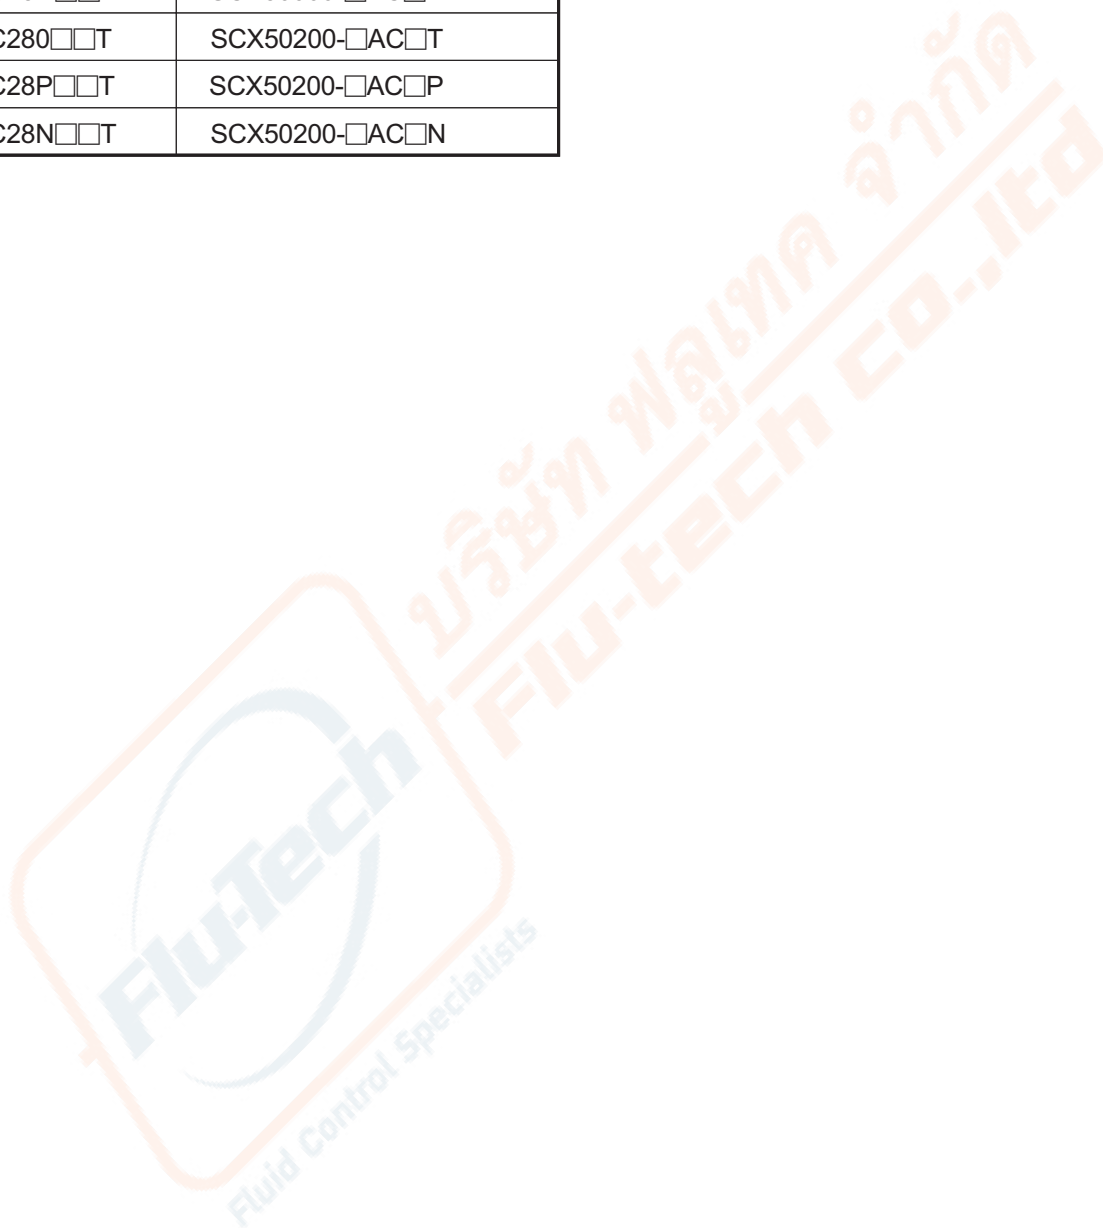

SC28 MINI-TYPE ORDER INFORMATION

SCX 5 ⑤ ⑥ ⑦ ⑧ - ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘

⑤ ⑥ Model

00: Standard
02: High temperature

⑦ ⑧ Certification

00: None

⑨ Construction

A: Standard
B: Extension type
D: Ultra extension type
E: High temperature general type
F: High temperature extension type
G: High temperature ultra extension type

⑩ Fork length

A: 40mm

⑪ Housing

C: Compact

⑫ Housing cover

C: Cable
D: DIN43650
M: M12x1(180°)
N: M12x1(90°)
※M12x1 with cable, standard cable length 2M,
PVC 24AWG

⑬ Power supply

T: 20~250Vac/Vdc, 50/60Hz; 2 wire contactless electronic switch
P: 12~55Vdc; 3 wire PNP output
N: 12~55Vdc; 3 wire NPN output

(Next page)

Connection

00: None
01: PT male
03: PF male
05: BSP male
07: NPT male
40: 5kg/cm2
42: 10kg/cm2
48: 150Lbs
49: 300Lbs
51: 600Lbs
57: PN 10
58: PN 16
59: PN 25
60: PN 40
62: PN 0.6 Mpa
63: PN 1.0 Mpa
64: PN 1.6 Mpa
65: PN 2.5 Mpa
66: PN 4.0 Mpa

MA: SUS304
MB: SUS316
MC: SUS316L

00: None


B: $Ra \leq 1.5\mu m$
C: $Ra \leq 0.8\mu m$

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



NEPSI Ex ia IIC T3~T6 Ga

Dimensions (Unit:mm)			
	SC380 Standard Type	SC381 Extension Type	SC382 Ultra Extension Type

Output type	 8/16mA output type	3 Wires (NPN/PNP) output type	Dual-relay output type
Working voltage	11 ~36 Vdc	10 ~55 Vdc	19~253Vac / 2dc,50 / 260Hz
Power consumption	< 600mW	< 830mW	Max. 1.3W
Input protection	Reversed power supply protection function		NA
Overvoltage protection	overvoltage category III		
Measuring error	Max.±1mm		
Repeatability	0.5mm		
Hysteresis band	Approx.2mm		
Ambient temp.	-40~85 °C (Intrinsically safe type -40~70 °C)	-40~85 °C(Refernce operation manual)	
Process temp.	-40~150 °C		
Applicable density liquid	≥0.5 g/cm ³ or ≥0.7 g/cm ³		
Liquid viscosity	Max.10000mm ² / S(10000cSt)		
Granule size contained in the liquid	Max.φ5 mm		
External diameter of conduit cable	φ6~φ10 mm		
Process pressure	Max.40 bar		
Output signal	Intrinsically safe signal 8 / 216mA	Transistor output (NPN/PNP)	2 sets of SPDT relay output
Contact capacity	NA	350mA , 55Vdc	6A / 250Vac , 6A / 28Vdc
Protection level	IP66/67		
Probe material	SUS 304 / 2316 / 316L		
Intrinsically safe parameters	Ui(V)=36V , Ii=100mA,Pi=1W Ci(nF)=0 , Li(uH)=0※	NA	NA

※ Must be equipped with intrinsic safety barrier to form a standard intrinsically safe system (Ex ia), please refer to another DM/brochure for TXX safety barrier.

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



NEPSI Ex ia IIC T3~T6 Ga

Dimensions (Unit:mm)	<p>SC380 High-temp. Type</p>	<p>SC381 High-temp. Extension Type</p>	<p>SC382 High-temp. Ultra Extension Type</p>		
	8/16mA output type	3 Wires (NPN/PNP) output type	Dual-relay output type		
	Working voltage	11 ~36 Vdc	10 ~55 Vdc	19~253Vac/dc,50/60Hz	
	Power consumption	< 600mW	< 830mW	Max. 1.3W	
Input protection	Reversed power supply protection function		NA		
Overvoltage protection	overvoltage category III				
Measuring error	Max.±1mm				
Repeatability	0.5mm				
Hysteresis band	Approx.2mm				
Ambient temp.	-40~85 °C(Refernce operation manual)				
Process temp.	-40~150 °C				
Applicable density liquid	≥0.5 g/cm ³ or ≥0.7 g/cm ³				
Liquid viscosity	Max.10000mm ² / S(10000cSt)				
Granule size contained in the liquid	Max.φ5 mm				
External diameter of conduit cable	φ6~φ10 mm				
Process pressure	Max.40 bar				
Output signal	Intrinsically safe signal 8/16mA	Transistor output (NPN/PNP)	2 sets of SPDT relay output		
Contact capacity	NA	350mA , 55Vdc	6A / 250Vac , 6A / 28Vdc		
Protection level	IP66/67				
Probe material	SUS 304 / 316 / 316L				
Intrinsically safe parameters	Ui(V)=36V , li=100mA,Pi=1W Ci(nF)=0 , Li(uH)=0※	NA	NA		

※ Must be equipped with intrinsic safety barrier to form a standard intrinsically safe system (Ex ia), please refer to another DM/brochure for TXX safety barrier.


SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

DESCRIPTION OF FEATURES


FORK TRIGGER POINT

The position of the SC38 fork trigger point depends on the mounting position as shown in the figure below: (When the testing medium is water, S.G.=1 g/cm³, distance of the trigger point is 13mm). If the testing medium has an S.G lower than 1g/cm³, the trigger point would rise. Similarly, the trigger point will move downward while the S.G is greater than water. The moving distance is subject to the S.G.

※Operating point position: ◀




ENVIRONMENT AND PROCESS TEMPERATURE LIMITATION

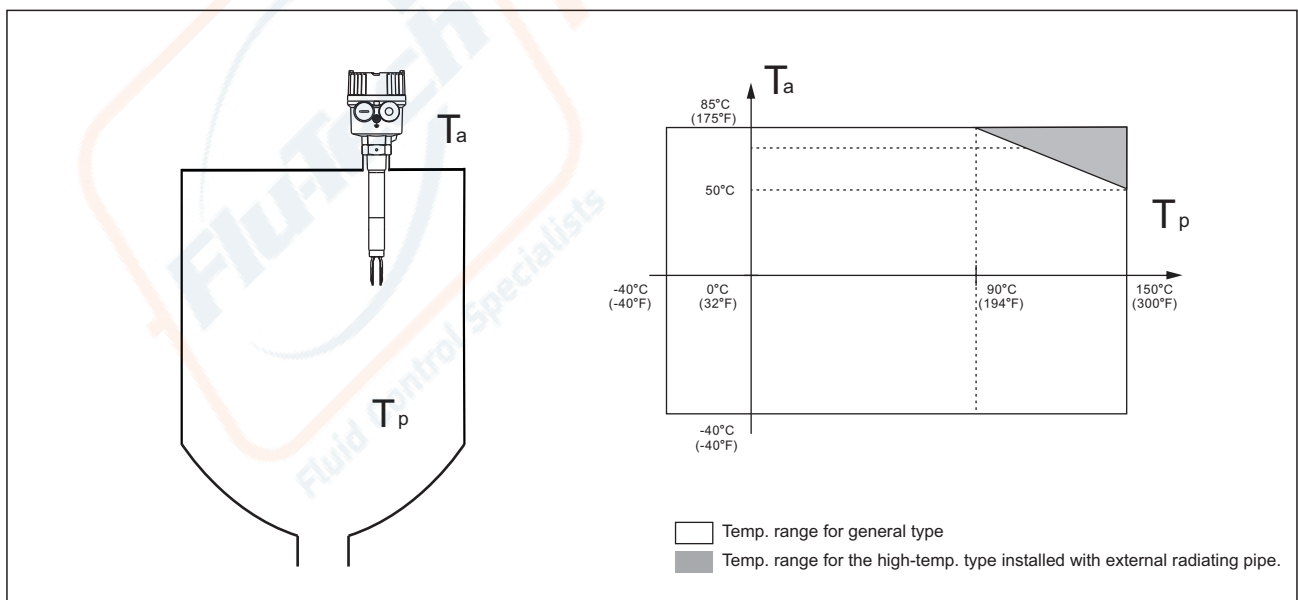

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

DESCRIPTION OF FEATURES

PANEL INTRODUCTION

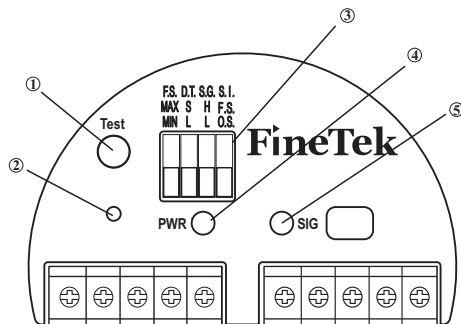

- ①: Test button
- ②: Operation point calibration button
- ③: Function adjustment button
- ④: Power indicator
- ⑤: Status indicator


Abbreviation	Function	Option Description	Remarks
Test	Test button	Reverse the signal output	It is for the test after the installation is completed.
F.S.	Fail-Safe	MAX: High MIN: Low	It is for the high and low Fail-Safe mode.
D.T.	Delay Time	S: General setting L: Delay for 5 seconds	Covered by material: Approx. 0.5s Not covered by material: Approx. 1s Switch to L to set it at 5 seconds for either covered or not covered by material.
S.G.	Specific Gravity	H: $\geq 0.7 \text{ g/cm}^3$ L: $\geq 0.5 \text{ g/cm}^3$	The switch to set the material density.
S.I.	Signal Indication	F.S.: Fail-Safe mode O.S.: Output mode	Turn ON/OFF the yellow indicator based on the output status or the fail-safe status.

DESCRIPTION OF THE TEST BUTTON

This button is mainly provided for the user to check whether the output operation works normally after the installation is completed. When the button is pressed, the output current (8mA \leftrightarrow 16mA) and indicator (ON \leftrightarrow OFF) will be reversed. Once the button is released, it will recover the original status.

FUNCTION OF CUSTOMIZED OPERATION POINT POSITION

SC38 provides the function of customizing the operation point position according to what is required by the user.



Settings

1. Keep pressing "Calibration Button" for 3 seconds. When the red and green LED indicators flash every 0.5 second, it enters the calibration mode. Press the calibration button again to enter the Empty Bin Calibration mode.

[Empty Bin Calibration]

2. Calibration status: The red LED indicator flashes every 0.5 second, and the output current switches to operate every 0.5 second (8 \leftrightarrow 16mA).

3. This mode is to calibrate the vibration frequency of the tuning fork in the air. Press "Calibration Button" when the tuning fork doesn't touch any material. The unit will record the vibration frequency in the air, and enter the operation point calibration mode.

[Operation Point Calibration]


1. Calibration status: The red LED indicator flashes every 0.25 second, and the output current switches to operate every 0.25 second (8 \leftrightarrow 16mA).

2. Cover the material to the desired operating point position under this mode, and then press "Calibration Button". It will be adjusted to the corresponding operating point position according to the H/L setting of the S.G.

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS

WIRING CONFIGURATION DIAGRAM AND INTRODUCTION OF FEATURES

8/16mA output

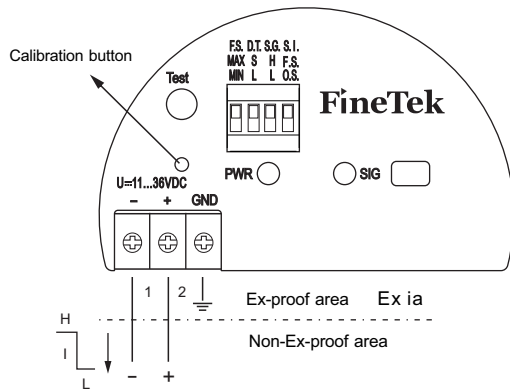


Failure mode	Material level	Output signal	LED indicators
MAX		+ ~16mA → 1	☀ O.S. ☀ F.S. ○
		+ ~8mA → 1	☀ O.S. ○ F.S. ☀
MIN		+ ~16mA → 1	☀ O.S. ☀ F.S. ○
		+ ~8mA → 1	☀ O.S. ○ F.S. ☀
Instrument failure		+ <3.6mA → 1	☀ ☀

~16mA=16mA ± 5%

~8mA=8mA ± 5%

☀ : ON ☀ : Flash ○ : OFF

PNP/NPN Output

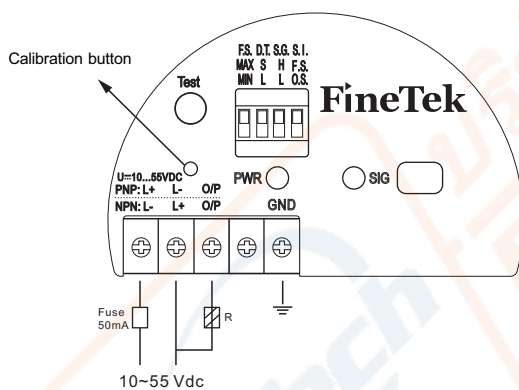

Failure mode	Material level	Output signal	LED indicators
MAX		□ → I _L → □	☀ O.S. ☀ F.S. ○
		□ → <100μA → □	☀ O.S. ○ F.S. ☀
MIN		□ → I _L → □	☀ O.S. ☀ F.S. ○
		□ → <100μA → □	☀ O.S. ○ F.S. ☀
Instrument failure		□ → <100μA → □	☀ ☀
Over Load (I _L > 350mA)		□ → <100μA → □	☀ ☀


I_L : Load current

☀ : ON ☀ : Flash ○ : OFF

R : External load

U = max. 55Vdc @ I_L = max. 350mA

Dual Relay output

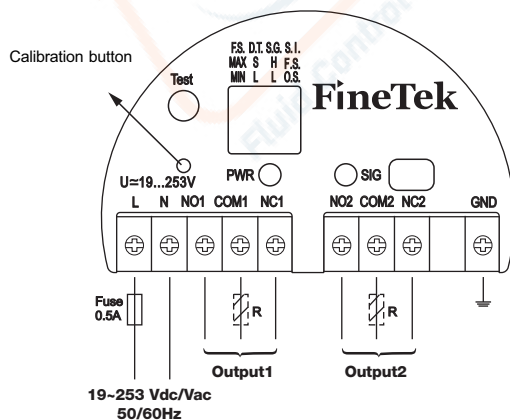

Failure mode	Material level	Output signal	LED indicators	
			PWR	SIG
MAX			☀ O.S. ☀ F.S. ○	
			☀ O.S. ○ F.S. ☀	
MIN			☀ O.S. ☀ F.S. ○	
			☀ O.S. ○ F.S. ☀	
Instrument failure			☀	☀

R: External load

U ~ max. 250Vac @ I_L ~ max. 6A

U = max. 28Vdc @ I_L = max. 6A

☀ : ON ☀ : Flash ○ : OFF

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC380C□□□□0	SCX500□□-AA
SC380F□□□□0	
SC380G□□□□0	
SC381C□□□□1	SCX500□□-BA
SC381F□□□□1	
SC381G□□□□1	
SC382C□□□□2	SCX500□□-CA
SC382F□□□□2	
SC382G□□□□2	
SC380C□□□□3	SCX502□□-EA
SC380F□□□□3	
SC380G□□□□3	
SC381C□□□□4	SCX502□□-FA
SC381F□□□□4	
SC381G□□□□4	
SC382C□□□□5	SCX502□□-GA
SC382F□□□□5	
SC382G□□□□5	

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

ORDER INFORMATION

	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28		
SCX 5																										
05 06 Model																										
00: Standard																										
02: High temperature																										
07 08 Certification																										
01: None, 1/2"PF																										
02: None, 1/2"NPT																										
7B: NEPSI-Ex ia, 1/2"NPT																										
09 Construction																										
A: Standard																										
B: Extended type																										
D: Ultra extension type																										
E: High temperature general type																										
F: High temperature extension type																										
G: High temperature ultra extension type																										
10 Fork length																										
A: 40mm																										
11 Housing																										
F: Shared junction box(Aluminum box)																										
R: Shared junction box(Stainless steel)																										
12 Housing cover																										
A: Without lens(Shared junction box)																										
B: With lens(Shared junction box)(Only stainless steel)																										
13 Power supply																										
A: 19~253Vac/Vdc, 50/60Hz; Two relay output																										
C: 10~55Vdc; 3 wire PNP/NPN output																										
D: 11~36Vdc; 8/16mA output																										

(Next page)

Connection

00: None
01: PT male
03: PF male
05: BSP male
07: NPT male
40: 5kg/cm2
42: 10kg/cm2
48: 150Lbs
49: 300Lbs
51: 600Lbs
57: PN 10
58: PN 16
59: PN 25
60: PN 40
62: PN 0.6 Mpa
63: PN 1.0 Mpa
64: PN 1.6 Mpa
65: PN 2.5 Mpa
66: PN 4.0 Mpa

MA: SUS304
MB: SUS316
MC: SUS316L

00: None
36: ETFE

B: $Ra \leq 1.5\mu m$
C: $Ra \leq 0.8\mu m$

Code	Probe length	Remarks
0054	54mm	Shared junction box-hidden plate type
0076	76mm	Shared junction box-thread type
0098	98mm	Shared junction box-hidden extension type
0120	120mm	Shared junction box-thread extension type
0099~3000	99~3000mm	Shared junction box-hidden plate lengthened type
0121~3000	121~3000mm	Shared junction box-thread lengthened type



บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270

845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : pneumatic@flutech.co.th, www.flutech.co.th