

MP-FILENCO Dryer/Filters

Series 25
Port Size: 1/4



Model Shown: CD25-2D3M

SPECIFICATIONS

Ambient/Media Temperature:

40° to 125°F (4° to 52°C).

Drain: Automatic drain; optional manual or electronic drains.

Desiccant: Choice of three.

Flow Rate: 7 scfm (3.3 l/s).

Fluid Media: Compressed air.

Inlet Pressure: 150 psig (10 bar) maximum. Consult Master Pneumatic for higher pressure ratings.

Many compressed air systems require point-of-use cleaning and drying of the air to supplement a central system. MP-Fileenco dryer/filter units perform superbly because of their triple-action cleaning process and their ability to reduce the pressure dew point. See the sketch on page 95 for a cross-section view of a typical dryer/filter.

The filtering and drying functions result in super clean, super dry air. Several drain options and choices of desiccants are available to suit various operating needs.

DESICCANTS

The desiccants in **MP-Fileenco** dryer/filters have the ability to drop the pressure dew point thereby preventing the recurrence of water in the air system. They also adsorb sulfur compounds that form abrasive, gummy varnish or shellac. Three different desiccants are available.

CLAY DESICCANT (CD) — This is a general purpose desiccant which produces initial dew point depressions of 20 to 25 degrees Fahrenheit. It is effective for removing both water and oil, and requires no air preparation. Life expectancy is up to three months, depending on humidity, flow rate, and frequency of use.

CLAY DESICCANT WITH ACTIVATED CARBON (CDC) — This desiccant provides a higher degree of air purification than the plain clay desiccant. A layer of activated carbon produces slightly lower initial dew points, and also provides better removal of noxious gases and oil aerosols.

MOLECULAR SIEVE DESICCANT (MS) — Highly porous alumina-silicate complexes in this desiccant produce exceptionally low pressure dew points, as much as 80 Fahrenheit degrees initially. A dryer/filter with this desiccant must be preceded by a coalescing filter. The presence of oil in the air will contaminate the molecular sieve material and greatly reduce its efficiency. The coalescing pre-filter, of course, should be preceded by a general purpose filter.




บริษัท ฟลูเทค จำกัด
FLU - TECH CO., TD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 102070
845/3-4 Thepharak RD., T. Thepharak, A. Muang, Samutprakan 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th


DIMENSIONS inches (mm)

A with Drain							
Series	A No Drain	D1, D2 D3, D4	D6	D7	D8	B	Depth
25	7.0 (178)	12.3 (311)	10.5 (267)	11.6 (295)	9.5 (241)	2.6 (67)	3.5 (89)

Lbs (Kg)	CD25	MS25	CDC25
Approx. Weight	2.11 (0.96)	2.11 (0.96)	2.11 (0.96)

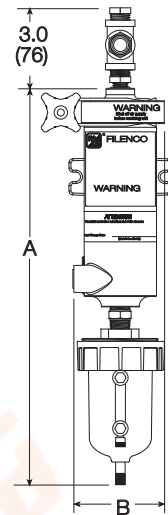

FLOW CHART

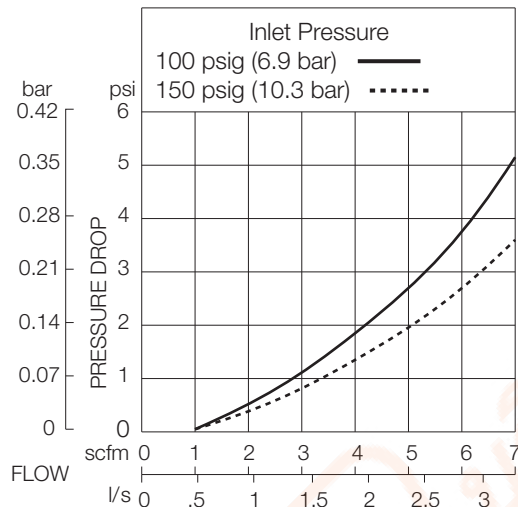

REPLACEMENT DESICCANT ELEMENT KITS

Description	Quantity (per case)	Kit Number
Clay Desiccant Elements Series 25	4	CD-25NRE
Clay with Activated Carbon Series 25	4	CDC-25NRE
Molecular Sieve Elements Series 25	4	MS-25NRE

Note: Replacement kits include parts for both the older and current designs of filter discs.

ORDERING INFORMATION

Change the letters in the sample model number below to specify the dryer/filter you want.

CD 25-2 D1 M W

PORT TYPE

NPTF threads Leave Blank
BSP threads W

DESICCANT

Clay CD
Clay with carbon CDC
Molecular sieve MS

DRAIN

None Leave Blank
Polycarbonate bowl; plastic bowl guard:
Manual drain PGM-25 D1
Automatic float drain D2
PGA-25
Metal bowl with sight glass:
Manual drain MSM-25 D3
Automatic float drain D4
MBA-25
Air poppet (actuator required);
24v heated drain; D6
temperature controlled
Air poppet with 24v adjustable D7
cycle heated electronic timer
Warrior electronic 115vac drain D8

MOISTURE INDICATOR

None Leave Blank
With moisture indicator M
MI375



บริษัท ฟลูเทค จำกัด
FLU - TECH CO., TD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270
845/3-4 Thepharak RD., T. Thepharak, A. Muang, Samutprakan 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th