



HYDRAULIC DUAL BLOCK & STOP VALVES HDBH SERIES

PRODUCT CATALOG




Hydraulic Dual Block & Stop Valve

Product Overview



Dual Block & Stop Safety Function

Blocks the flow of hydraulic fluid in order to stop cylinder motion.

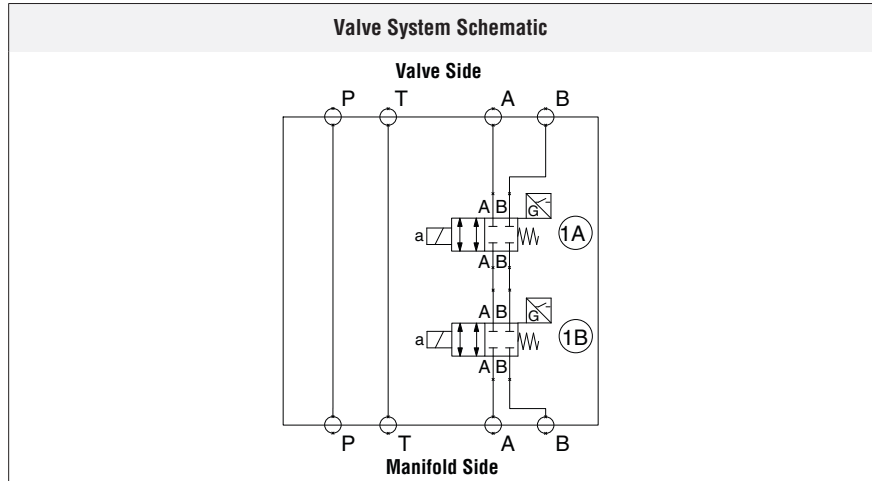

The HDBH Series system is a redundant, dual blocking valve system designed for critical applications where safe stopping is required for hydraulically controlled actuators. This valve system is equipped with inductive position switches for external monitoring by an electrical safety control system. The HDBH valve is designed to be sandwich-style mounted (interposed) between a manifold and a directional valve, or in-line mounted by use of optional mounting kits.

NOTE: Block and Stop functions are intended to momentarily stop an actuator (linear or rotary), but not to hold the actuator in place for an extended period. The HDBH valve is a spool type valve, and normal spool leakage will occur. The valve is intended to be used as a “permissive” safety device. Applications where long-term holding is necessary should also incorporate other components such as PO check, counterbalance, or mechanical locking devices.

NOTE: HDBH valves are intended to be used only for tasks that are routine, repetitive, and integral to production. Maintenance tasks require following full lock-out/tag-out procedures to relieve hazardous energy and prevent unexpected startup.

VALVE SYSTEM FEATURES

External Monitoring	Each single valve in the HDBH Series system is equipped with an inductive position switch. Monitoring of these switches is to be done by an electrical safety control system.
Spool Type Design	Redundant spool type valve system
Tamper Resistant	Special tool required for disassembly
Mounting	Mounts between manifold and directional valve
Flexible Mounting	In applications where installation on a manifold is not practical, the in-line mounting kit can be used to facilitate installation in-line between a directional valve and actuator (typically a cylinder). The kit provides 2 mounting plates with multiple ports for the A, B, and T ports in order to provide for flexibility in piping. At least one of the T ports must be piped back to the tank. Through holes for mounting the assembly are included in the plates. All assembly hardware and plugs are included, but mounting hardware for the assembly must be provided by the customer.
Flow-doubling	In applications where higher flows are needed, there is an option to combine the flow through both the A & B ports to double the flow capacity of the valve. This doubling effect converts the HDBH valve to a single line blocking valve instead of blocking two lines. The kit provides 2 mounting plates with multiple ports for the inlet and outlet for flexibility in piping and two T(DR) ports. At least one of the T(DR) ports must be piped back to the tank to perform a drain function. All assembly hardware and plugs are included, but mounting hardware for the assembly must be provided by the customer.
Spacer Kits	Spacer kits are available to raise the HDBH Series system higher above the manifold surface in order to avoid interference with other devices on the manifold. Kits can be combined as necessary to achieve the desired spacing.

These valves are not designed for controlling clutch/brake mechanisms on mechanical power presses.

STANDARD SPECIFICATIONS

GENERAL	Function		Dual Block & Stop - blocks both cylinder lines when sandwich mounted or mounted with the In-line Mounting Kit. Blocks only one line when mounted with the Flow-doubling In-line Mounting Kit.
	Construction Design		Redundant valve system, Spool
	Actuation (solenoid - 2 per system)		One solenoid per valve element Both to be operated synchronously Direct solenoid-operated, spring return
	Mounting	Type/ Orientation	Sandwich-style mounting (interposed) between base/manifold and directional valve
			In-line mount between directional valve and actuator (in-line mounting kit required)
		Footprint	ISO 4401-03-02-0-05, NFPA D03, NG size 6
	Monitoring		Dynamic, cyclical, external with customer supplied equipment. Monitoring should check state of both valve position switches with any and all changes in state of valve control signals. See Integration Guide.
Minimum Operation Frequency		Once per month, to ensure proper function	

OPERATING CONDITIONS	Temperature	Ambient	-22° to 158°F (-30° to 70°C)
		Media	-4° to 140°F (-20° to 60°C)
	Flow Media	Hydraulic Fluids	Mineral Oil HLP, HL-DIN 51524
			Vegetable Oil HETG - VDMA 24568
	Flow		5 gpm (10 gpm with Flow-doubling in-line mounting kit)
	Max Fluid Contamination Level		ISO 4401 class 21/19/16 NAS 1638 class 10 (filters at 25 µm value with β25 ≥ 75 recommended)
	Operating Pressure	Ports P, A, B	5000 psi (350 bar)*
Port T		3000 psi (210 bar)*	
*Operating Pressure for Ports P, A, & B limited to 3000 psi (210 bar) unless T port is used (not blocked)			

ELECTRICAL DATA	Solenoids		Version as per VDE 0580. Rated for continuous duty. Electrical connection according to DIN EN 175301-803 Form A Enclosure rating according to DIN EN 60529 IP 65
	Operating Voltage		24 volts DC
	Power Consumption (each solenoid)		30 watts
	Inductive Position Switch (2 per system)		PNP (M12, 4-pin, A-coded, male): works with both 4-pin & 5-pin female cord sets
	Maximum Current (each switch)		400mA maximum

CONSTRUCTION MATERIAL	Valve Body		Cast Steel
	Spool		Steel
	Seals		Buna-N
	End-brackets		Unfilled Nylon 12
	Side-brackets (label)		304 Stainless Steel
	In-line Mounting Kit		Ductile Iron
	Flow-doubling In-line Mounting Kit		

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

PRODUCT CREDENTIALS

Safety Category <i>(3rd party certification pending)</i>		CE Conformity Declaration 	UKCA (UK Conformity Assessed)
--	--	--------------------------------------	--

Ordering Information & System Technical Data

MODEL NUMBER


HDBHDC3BAEXA

Weight lb (kg)


15.0 (6.80)

DIMENSIONS

Inches (mm)

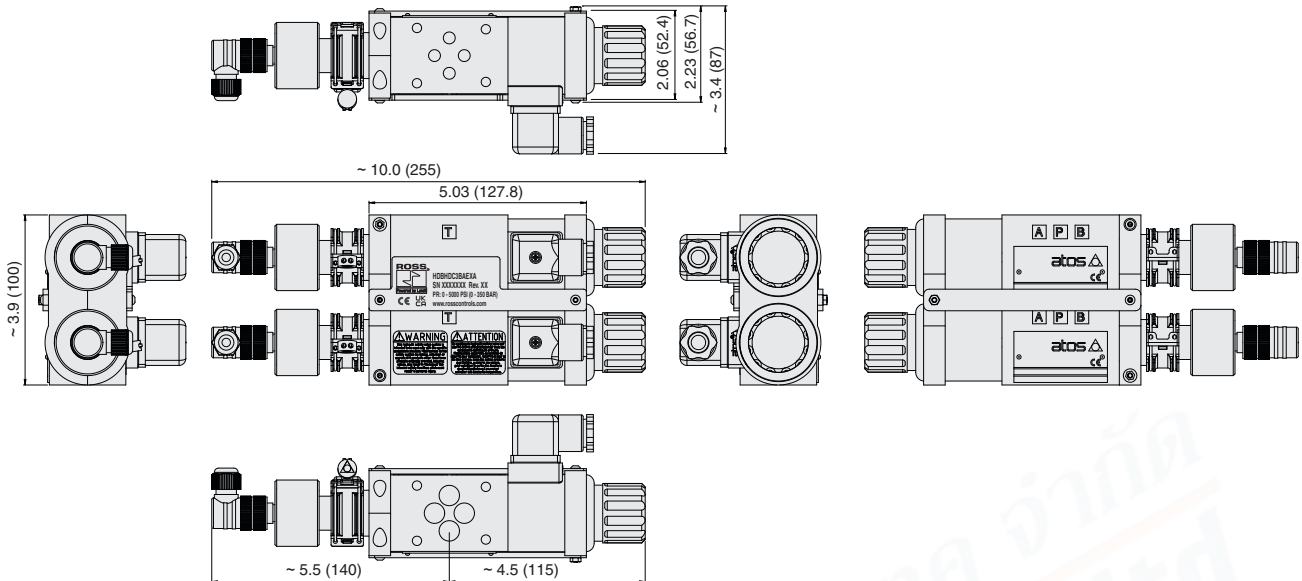


For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

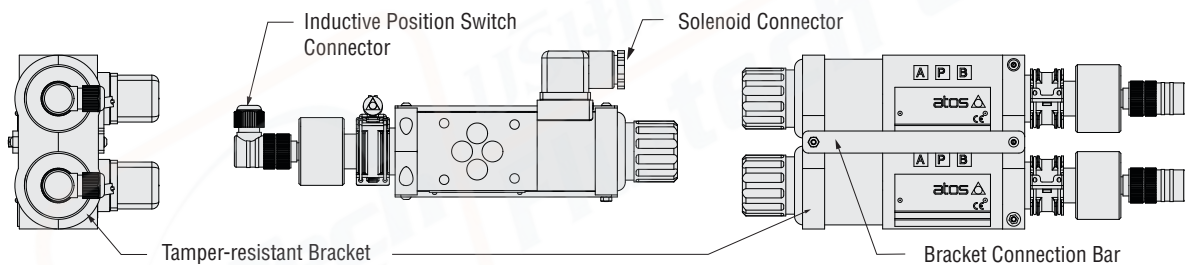

Wiring Diagram

Inductive Position Switch Connector



- 1 = Supply +24 volts DC
- 2 = Output Signal NC
- 3 = Ground
- 4 = Output Signal NO

NOTE: PNP (M12, 4-pin, A-coded, male); works with both 4-pin & 5-pin female cord sets.







NOTE: The switches must be wired with 24 volt (+) and 0 volt (-) connections in parallel with each other.



บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270
845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th

PRESSURE DROP CURVES

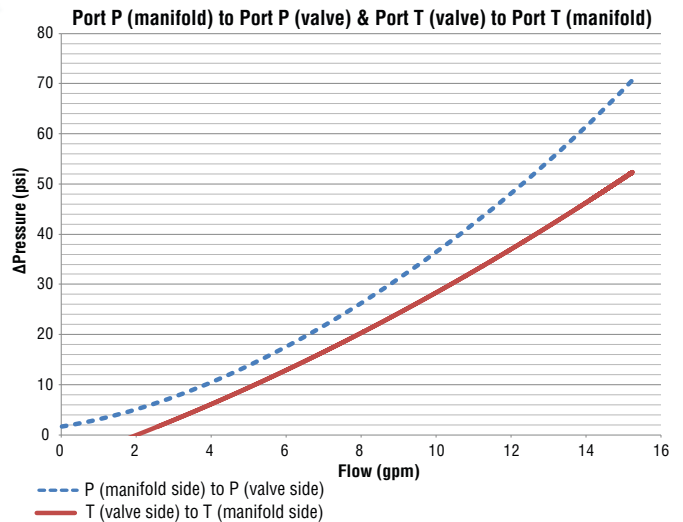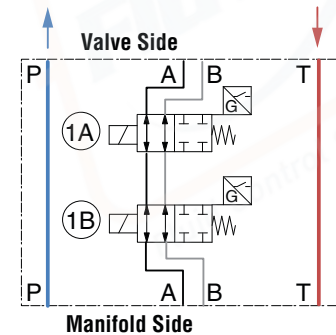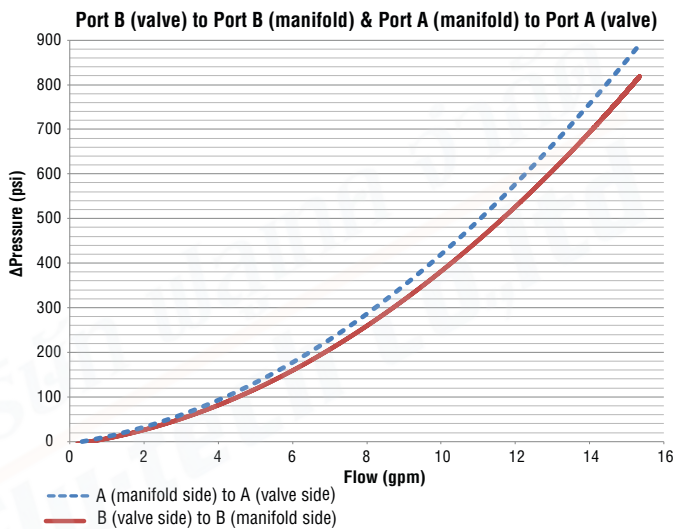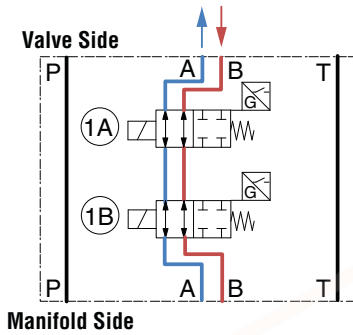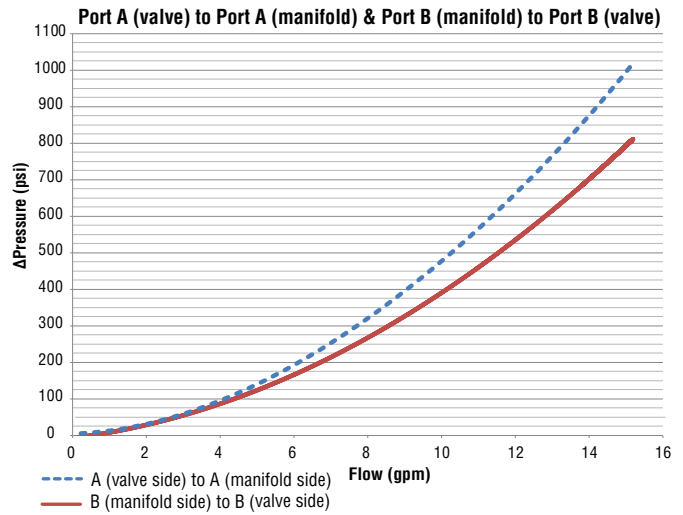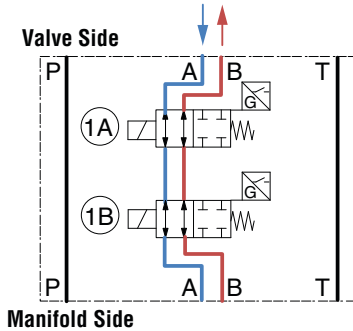

Accessories

MOUNTING ACCESSORIES

Spacer Kits	Height	Kit Number	Weight lb (kg)
	0.75 in (19.1 mm)	2548B25	1.0 (0.45)
	1.75 in (44.5 mm)	2549B25	2.0 (0.90)

Mounting Kits	Kit Type	Kit Number	Weight lb (kg)
	In-line (Blocks 2 lines)	2790B77	17.0 (7.71)
	In-line Flow-doubling (Blocks 1 line)	2819B77	

DIMENSIONS – TECHNICAL DATA Inches (mm)

Spacer Kit

In-line Mounting Kit

A	SAE # 6
B	SAE # 6
T	SAE # 6

In-line Flow-doubling Mounting Kit

P	SAE # 10
A	SAE # 10
T(DR)	SAE # 6

For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats. Please visit www.rosscontrols.com.

ELECTRICAL CONNECTORS

Pre-wired Connector Kits	Connection	Connector Type	End 1	End 2	Quantity	Length meters (feet)	Cord Diameter mm	Kit Number
								Without Light
Solenoid	DIN EN 175301-803 Form A	Connector	Connector	Flying leads	2	5 (16.4)	6	2243H77
					2	10 (32.8)	6	2244H77
Sensor	M12 5-pin, straight, A-coded	Female	Female	Flying leads	2	5 (16.4)	6	2644B77
					2	10 (32.8)	6	2370B77
				Male	2	5 (16.4)	6	2645B77
					2	10 (32.8)	6	2371B77

Pre-wired Connectors	Connection	Connector Type	End 1	End 2	Quantity	Length meters (feet)	Cord Diameter mm	Model Number	
								Without Light	Lighted Connector 24 Volts DC
Solenoid	DIN EN 175301-803 Form A	Connector	Connector	Flying leads	1	2 (6.5)	6	721K77	720K77-W
					1			10	371K77

Connectors (no cable)	Connection	Connector Type	Fitting Connection	Quantity	Cord Diameter mm	Model Number	
						Without Light	Lighted Connector 24 Volts DC
Solenoid	DIN EN 175301-803 Form A		Cable grip	1	8 to 10	937K87	936K87-W
			1/2" NPT conduit	1	-	723K77	724K77-W

CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.

