



**CLUTCH/BRAKE CONTROL DOUBLE VALVES**  
**DM<sup>2</sup>® SERIES D**

---

**PRODUCT CATALOG**



# DM<sup>2®</sup> Series D Clutch/Brake Control Double Valves


## Product Overview



### Clutch/Brake Control Function

The DM<sup>2®</sup> Series D double valve is designed to provide SAFETY for the operators and maintenance personnel working on presses.

### Simplified Schematic



The DM<sup>2®</sup> Series D double valve is a patented 3/2 normally closed valve (with an intermediate, lockout position) distinguished by SERPAR<sup>®</sup> Crossflow passages with poppet and spool valving on the main valve stems. This arrangement provides the valve's outstanding flow characteristics and an integrated monitoring capability with total memory. The valve provides dynamic monitoring and dynamic memory.

**Dynamic Monitoring** means that all monitoring components change state on every valve cycle. Should the valve elements cycle asynchronously, the valve will exhaust downstream air and lock-out, prohibiting further operation.

**Dynamic Memory** within a monitoring system indicates that when a valve lock-out occurs, the valve will retain the fault information regardless of air or electrical changes. The DM<sup>2®</sup> system can only be reset by a defined operation/procedure, and will not self-reset (turning the valve off and on) or reset when inlet air supply is removed and re-applied. Such automatic resetting would conceal potential hazards from the operator.

## VALVE FEATURES

<b>Redundant Control</b>	Redundant control can achieve Category 4, PL e, when used with proper safety controls
<b>Dynamic Monitoring with Complete Memory</b>	Memory, monitoring, and air flow control functions are simply integrated into two identical valve elements. Valves lock-out due to asynchronous movement of valve elements during actuation or de-actuation, resulting in a residual outlet pressure of less than 1% of supply.
<b>Valve Reset</b>	Can only be accomplished by remote air signal, electrical solenoid reset signal, or manual pushbutton reset. The valve cannot be reset by removing and re-applying supply pressure.
<b>Poppet Design</b>	Dirt tolerant, wear compensating for quick response and high flow capacity
<b>PTFE Backup Piston Rings</b>	Enhances valve endurance enabling operation with or without in-line lubrication
<b>Status Indicator</b>	Includes a pressure switch with both normally open (NO) and normally closed (NC) contacts to provide status feedback to the control system indicating whether the valve is in the lockout or ready-to-run condition.
<b>Silencer</b>	High flow, clog resistant built-in silencer
<b>Mounting</b>	Base mounted for ease of valve replacement. Captive valve-to-base mounting screws.
<b>Flexible Piping</b>	Inlet and outlet ports on both sides (plugs for unused ports included)
<b>Intermediate Pilots (Basic Size 12 &amp; 30 valves only)</b>	Increases pilot air flow for fast valve response, making it possible to use the same size solenoids as valve sizes 2, 4 & 8, thereby reducing electrical power requirements for these larger valves.
<b>SISTEMA Library</b>	Available for download at <a href="http://rosscontrols.com">rosscontrols.com</a>

## PRODUCT CREDENTIALS

Safety Category	DGVV (German Social Accident Insurance)	CE Conformity Declaration	EAC Conformity Declaration	ISO Standard	CSA Certificate of Compliance	CRN Certification
				ISO 13849-1:2015		Available for appropriately tested valves

## STANDARD SPECIFICATIONS

<b>GENERAL</b>	Function		3/2 Normally Closed Valve		
	Construction Design		Dual Poppet		
	Actuation		Electrical – Solenoid Pilot Controlled		
	Mounting	Type	Base		
		Orientation	Vertically with pilot solenoids on top		
	Connection		Threaded; G, NPT		
	Monitoring		Dynamically, cyclically, internally during each actuating and de-actuating movement Monitoring function has memory and requires an overt act to reset unit after lockout		
Minimum Operation Frequency		Once per month, to ensure proper function			
<b>OPERATING CONDITIONS</b>	Temperature	Ambient	15° to 122°F (-10° to 50°C)		
		Media	40° to 175°F (4° to 80°C)		
	Flow Media		Filtered, lubricated or unlubricated (mineral oils according to DIN 51519, viscosity classes 32-46)		
	Operating Pressure	Valve Basic Size	2	45 to 150 psig (3.1 to 10.3 bar)	
			4, 8, 12, 30	30 to 120 psig (2.1 to 8.3 bar)	
Reset Pressure		For remote air reset option – must be equal to inlet pressure			
Manual Pressure		Encapsulated, push button actuation			
<b>ELECTRICAL DATA</b>	Solenoids		According to VDE 0580. Enclosure rating according to DIN 400 50 IP 65 Three solenoids, rated for continuous duty		
	Operating Voltage		24 volts DC 110 volts AC, 50 Hz 120 volts AC, 50/60 Hz 230 volts AC, 50/60 Hz		
	Power Consumption (each solenoid)	Primary Solenoids	Valve Basic Size	2, 4, 12, 30	24 V DC, 110 V AC, 120 V AC, 230 V AC – 5.8 watts nominal, 6.5 watts maximum
				8	24 V DC – 15 watts 110 V AC, 120 V AC – 36 VA inrush and 24.6 VA holding 230 V AC – 32 VA inrush and 22 VA holding
		Reset Solenoids	All Valve Basic Size	24 V DC, 110 V AC, 120 V AC, 230 V AC – 5.8 watts nominal, 6.5 watts maximum	
	Enclosure Rating		IP65, IEC 60529		
	Electrical Connection		DIN EN 175301-803 Form A, or M12		
	Mechanical Pressure Switch (Status Indicator) Rating		NO/NC Contacts - 0.1 A, 125/250 volts AC; 0.1 A, 30 volts DC; 0.3 A, 60 volts DC		
Solid State Pressure Sensor (Status Indicator) Rating		Supply Voltage - 8-30 volts DC Current Consumption <4mA			
<b>CONSTRUCTION MATERIAL</b>	Valve Body		Cast Aluminum		
	Poppet		Acetal and Stainless Steel		
	Seals		Buna-N		
<b>SAFETY DATA</b>	Functional Safety Data	Category	CAT 4, PL e		
		B <sub>100</sub>	20,000,000		
		PFH <sub>D</sub>	7.71x10 <sup>-9</sup>		
		MTTF <sub>D</sub>	301.9 (n <sub>op</sub> : 662400)		
	Vibration/Impact Resistance		Tested to DIN EN 60068-2-6		

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



# Ordering Information

## MODEL NUMBER CONFIGURATOR

## 3-Way 2-Position Valves

**DM2D** **N** **B21** **A** **1** **1** **005**

Series

Thread

G	D
NPT	N

Basic Size	Port Size		
	Inlet	Outlet	
2	1/4	1/4	B20
	3/8	3/8	B21
4	1/2	1/2	B42
	1/2	3/4	B43
8	3/4	3/4	A54
	1	1	A55
12	1	1	A66
	1	1-1/2	A67
30	1-1/2	2	A88

Reset Type

Remote Air	1
Solenoid	2
Manual	4

Other Options\*

Connector	Description		
DIN EN 175301-803 Form A	Solenoids	Connector not included	Leave Blank
	Solenoid Reset**		
	Mechanical Pressure Switch***	DIN EN Connector included	
M12 (24 V DC only)	Solid State Pressure Sensor***	M12 Built-in Connector included	005
	Solenoids	Adapter DIN EN to M12 Connector included	
M12 (24 V DC only)	Solenoid Reset**		005
	Mechanical Pressure Switch***		
	Solid State Pressure Sensor***	M12 Built-in Connector included	

\* See options for connectors or wiring kits.

\*\* If solenoid reset type option is selected.

\*\*\* If the specific status indicator option is selected.

Status Indicator

Mechanical Pressure Switch, DIN EN 175301-803 Form A	1
Solid State Pressure Sensor, M12	2
None	X

Voltage\*

24 volts DC	A
110 volts AC, 50 Hz; 120 volts AC, 50/60 Hz	B
230 volts AC, 50/60 Hz	C**
12 volts DC	D
24 volts AC	E

\* For other voltages consult ROSS.

\*\* 230 V AC not available in the U.S. (OSHA regulations limit press control voltage to no more than 120 volts AC).

Valves and Sub-Bases can be ordered separately, see Replacement Valves and Sub-Bases page.

Valve Basic Size	Port Size		Flow Cv		Weight lb (kg)
	1	2	1-2	2-3	
2	1/4	1/4	2.17	3.66	5 (2.3)
	3/8	3/8			
4	1/2	1/2	2.80	6.70	6.0 (2.8)
	1/2	3/4			
8	3/4	3/4	4.63	12.55	9.1 (4.2)
	1	1			
12	1	1	8.86	20.78	15.5 (7.1)
	1	1-1/2			
30	1-1/2	2	20.22	53.68	32.6 (14.8)

# Valve and base assembly with status indicator and solenoid reset.




บริษัท ฟลูเทค จำกัด  
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถนนพหลโยธิน ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270  
845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND  
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th

# Valve Operation


## Valve De-actuated (ready-to-run)

The flow of inlet air pressure into the crossover passages is restricted by the size of the passage between the stem and the valve body opening. Flow is sufficient to quickly pressurize pilot supply/timing chambers A and B. The inlet poppets prevent air flow from crossover passages into the outlet chamber. Air pressure acting on the inlet poppets and return pistons securely hold the valve elements in the closed position. (Air passages shown out of position and reset adapter omitted for clarity.)



## Valve Actuated

Energizing the pilot valves simultaneously applies pressure to both pistons, forcing the internal parts to move to their actuated (open) position, where inlet air flow to crossover passages is fully open, inlet poppets are fully open and exhaust poppets are fully closed. The outlet is then quickly pressurized, and pressure in the inlet, crossovers, outlet, and timing chambers are quickly equalized. De-energizing the pilots quickly causes the valve elements to return to the ready-to-run position.




## Valve Locked-out

Whenever the valve elements operate in a sufficiently asynchronous manner, either on actuation or de-actuation, the valve will move to a locked-out position. In the locked-out position, one crossover and its related timing chamber will be exhausted, and the other crossover and its related timing chamber will be fully pressurized. The valve element (side B) that is partially actuated has pilot air available to fully actuate it, but no air pressure on the return piston to fully de-actuate the valve element. Air pressure in the crossover acts on the differential of side B stem diameters creating a latching force.

Side A is in a fully closed position, and has no pilot air available to actuate, but has full pressure on the inlet poppet and return piston to hold the element in the fully closed position.

Inlet air flow on side A into its crossover is restricted, and flows through the open inlet poppet on side B, through the outlet into the exhaust port, and from the exhaust port to atmosphere. Residual pressure in the outlet is less than 1% of inlet pressure.

The return springs are limited in travel, and can only return the valve elements to the intermediate (locked-out) position. Sufficient air pressure acting on the return pistons is needed to return the valve elements to a fully closed position.




## Resetting the Valve

The valve will remain in the locked-out position, even if the inlet air supply is removed and re-applied. A remote reset signal (air or electric), or a manual push button actuation must be applied to reset the valve.

Reset is accomplished by momentarily pressurizing the reset port. Actuation of the reset piston physically pushes the main valve elements to their closed position. Inlet air fully pressurizes the crossovers and holds the inlet poppets on seat. Actuation of the reset piston opens the reset poppet, thereby, immediately exhausting pilot supply air, thus, preventing valve operation during reset. (Reset adapter added to illustration.)


De-actuation of reset pistons causes the reset poppets to close and pilot supply to fully pressurize.

Reset air pressure can be applied by a remote 3/2 normally closed valve, or from an optional 3/2 normally closed solenoid, or a manual push button mounted on the reset adapter.



## Status Indicator


The status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve is in the locked-out position or inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve.



Status Indicator  
in normal ready-to-run position



**Basic Size 12 and 30 valves** require relatively large pilots to actuate and de-actuate the main valve elements. In order to achieve extremely quick valve response for such large pilots, a 2-stage solenoid pilot system is incorporated into the design.

This keeps the required electrical current to operate the pilots to a minimum.




Valve

# Valve Technical Data

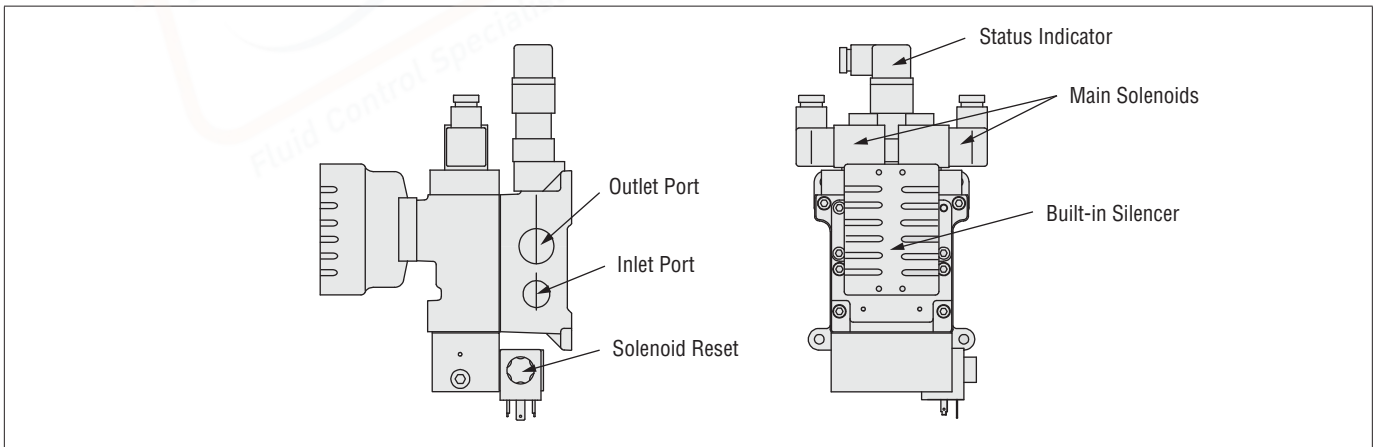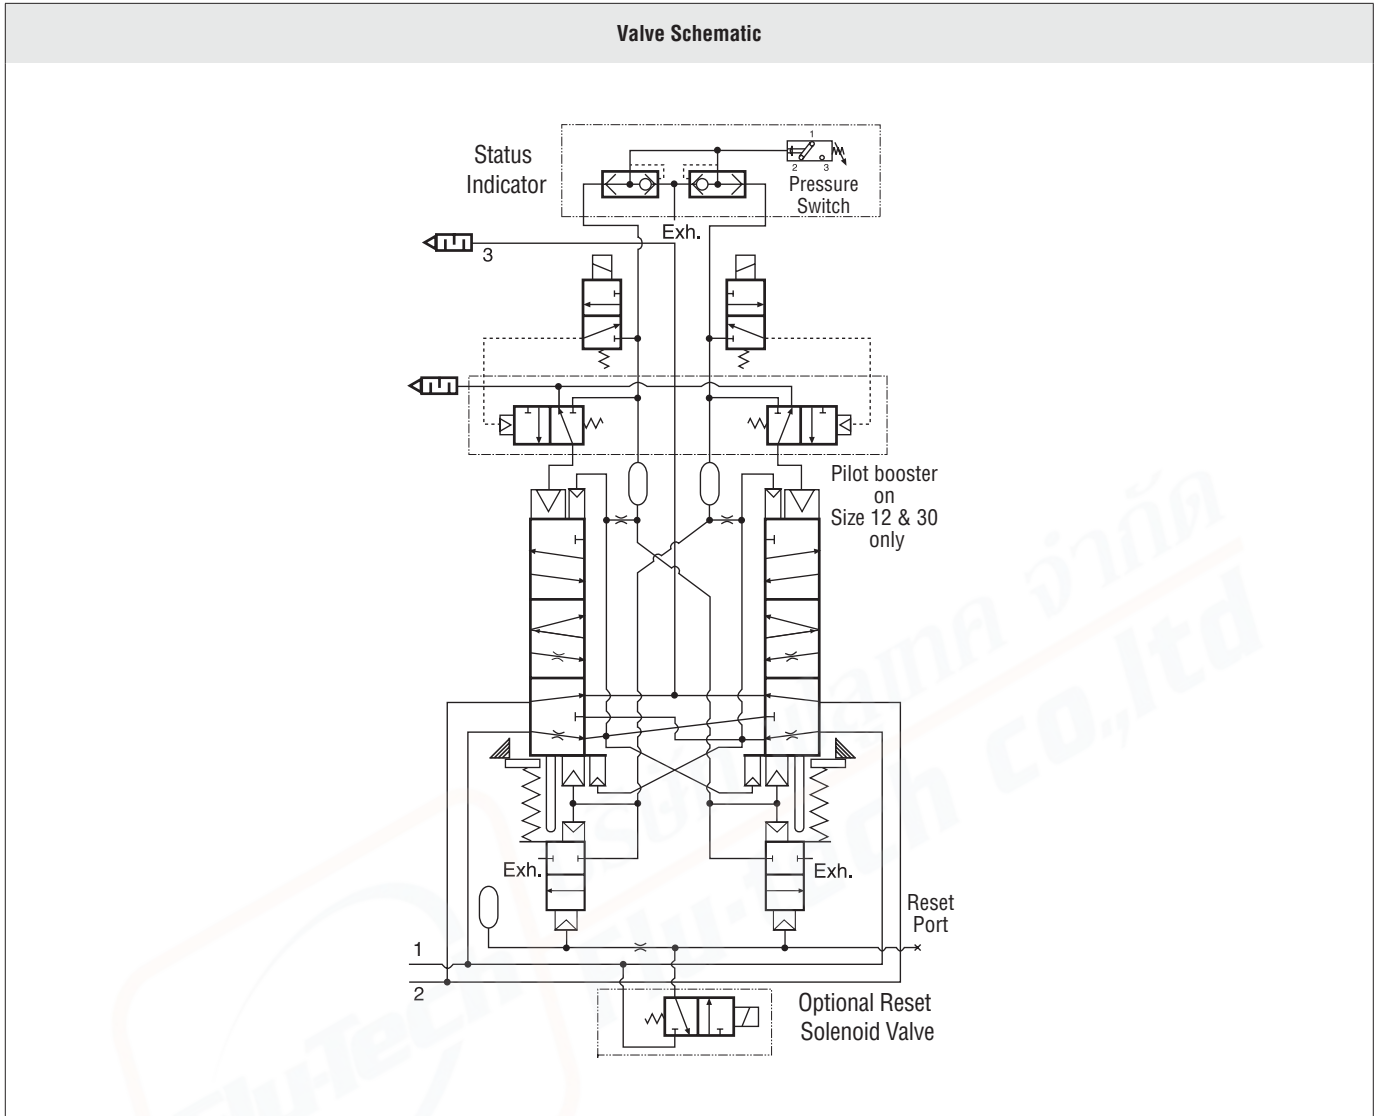

## VALVE RESPONSE CHARTS

The charts below represent the fill and exhaust times for each of the various sizes of DM<sup>20</sup> Series D double valves. The “fill” times were measured while raising (filling) the pressure in a volume from 0 to 30, 60, & 80 psi (0 to 2.1, 4.1, & 5.5 bar) with a 90 psi (6.2 bar) inlet pressure. Conversely, the “exhaust” times were measured while lowering the pressure (exhausting) in a volume from 90 psi (6.2 bar) down to 90 to 60, 30, & 9 psi (4.1, 2.1, & 0.6 bar). Exhausting tests performed with silencer installed.

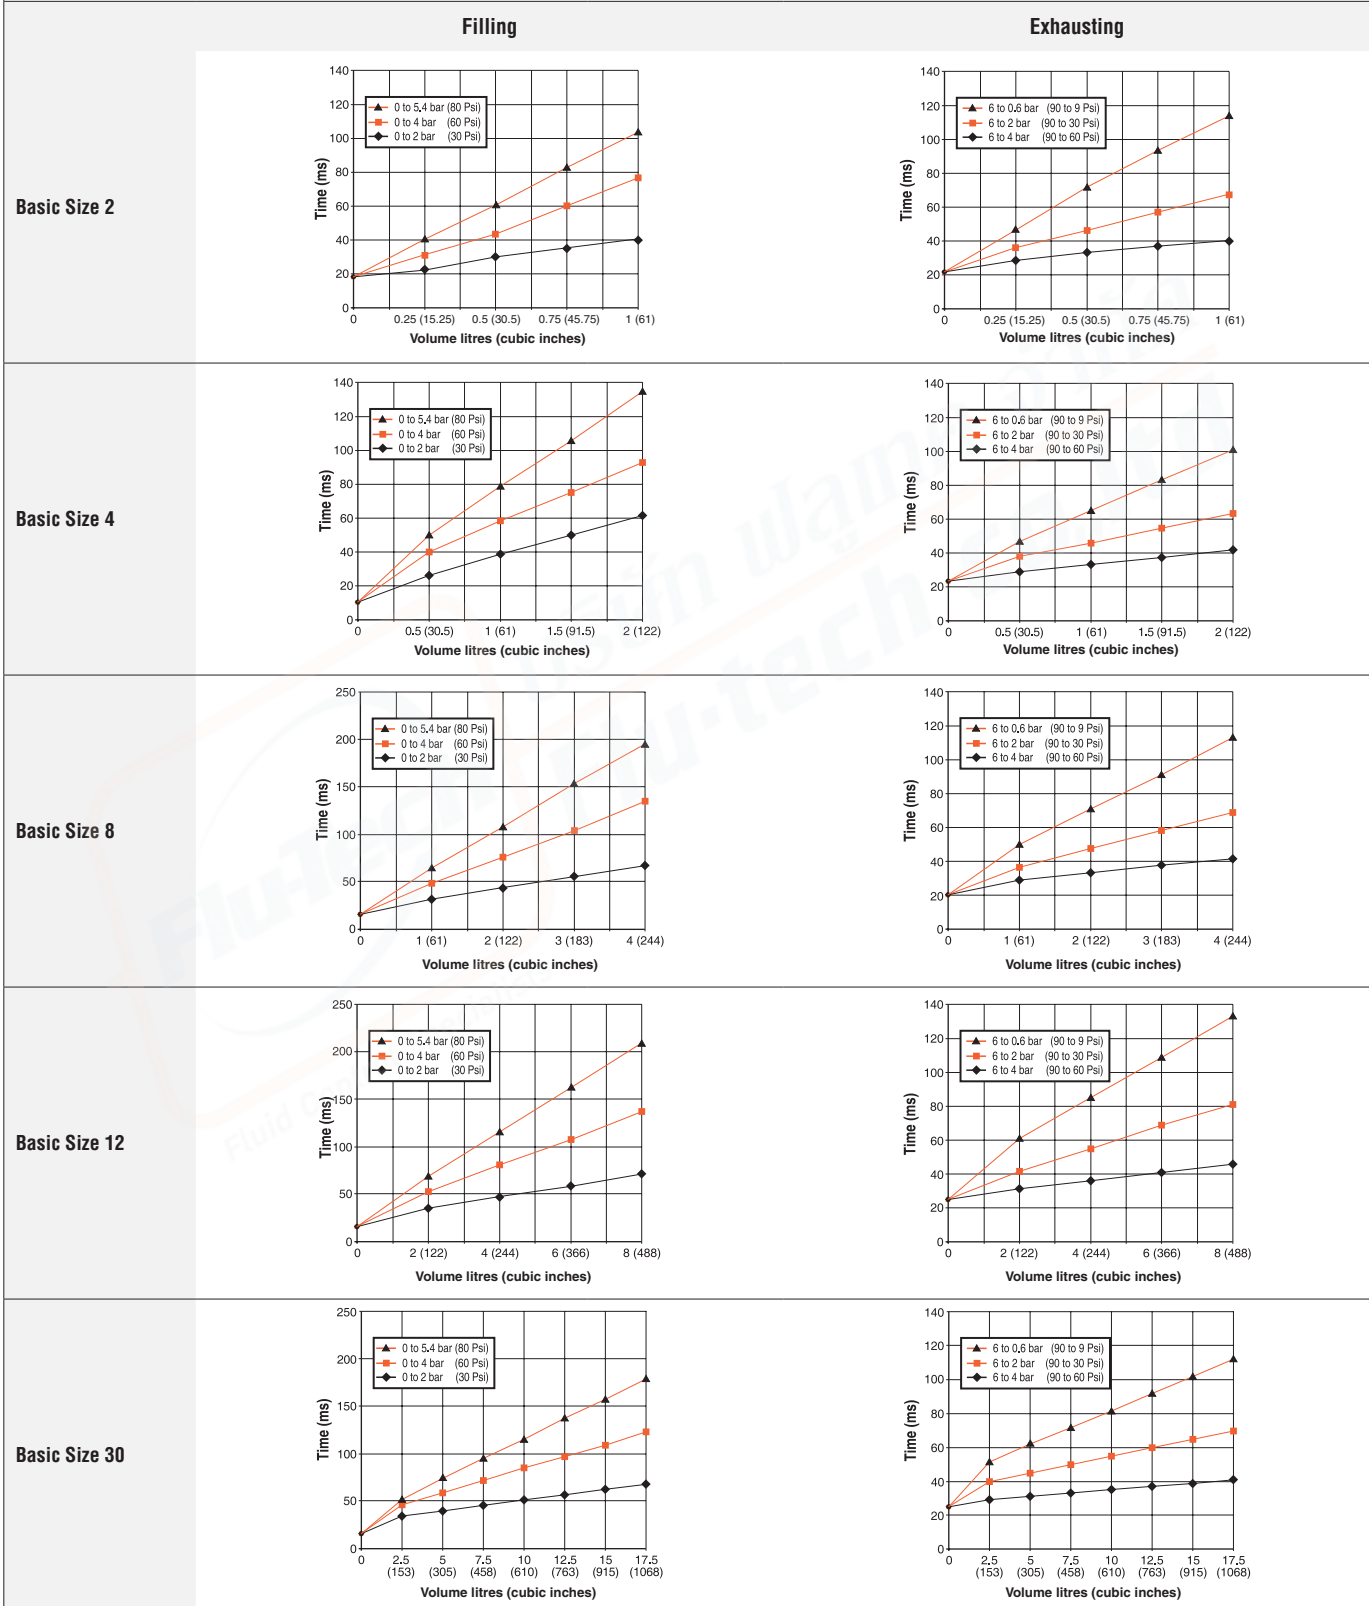

# Valve Technical Data

DIMENSIONS		Inches (mm)		
Basic Size	Port Size	View X (base mounting hole pattern)		
		2	1/4 3/8	<p>Side view dimensions: 4.79 (121.6), 1.19 (30.2), 0.82 (20.9), 1.37 (34.9)</p> <p>Front view dimensions: 4.50 (114.3), 10.89 (276.7), 7.90 (200.8), 10.32 (262.2), 2.99 (75.9), 2.04 (51.9), 4.00 (101.6), 0.25 (6.4)</p> <p>Mounting hole view: 0.022 (5.6) (4X), 4.00 (101.6), 2.99 (75.9), 4.00 (101.6), 2.04 (51.9), 0.25 (6.4), 0.57 (14.5) with Solenoid Reset</p>
		4	1/2	<p>Side view dimensions: 6.93 (176), 0.97 (24.6), 1.32 (33.5), 1.24 (31.5)</p> <p>Front view dimensions: 5.28 (134.1), 10.95 (278.1), 9.44 (239.8)</p> <p>Mounting hole view: 0.027 (6.75) (4X), 3.68 (93.47), 4.34 (110.2), 0.16 (4.06), 4.00 (101.6), 2.74 (69.6), 0.65 (16.6)</p>
8	3/4 1	<p>Side view dimensions: 8.73 (221.74), 1.15 (29.21), 1.97 (50.04), 1.83 (46.48)</p> <p>Front view dimensions: 5.94 (150.88), 12.73 (323.3), 11.16 (283.5)</p> <p>Mounting hole view: 4.60 (116.84), 0.16 (4.06), 6.23 (158.24), 4.28 (108.71), 0.86 (21.9), 0.034 (8.64) (4X), 2.68 (68.1)</p>		
<p>For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats, visit <a href="http://www.rosscontrols.com">www.rosscontrols.com</a>.</p>				



DIMENSIONS		Inches (mm)	
Basic Size	Port Size	View X (base mounting hole pattern)	
12	1		
30	2		
<p>For additional information, and to assist you with piping and connectivity designs, our products are available in downloadable 2D drawings and 3D CAD models in a wide range of options including native formats, visit <a href="http://www.rosscontrols.com">www.rosscontrols.com</a>.</p>			

# Accessories & Options

## ELECTRICAL STATUS INDICATION

Pressure Switches for Status Indicator	Indicator Type	Connector Type	Model Number	Port Thread	Factory Preset psi (bar)
	Mechanical Pressure Switch	DIN EN 175301-803 Form A	1104A30	M10x1	22 (1.5) falling
		M12	1153A30		
Solid State Pressure Sensor	M12	1335B30W	M10x1	17 (1.2) falling	

Status Indicator Assemblies	Indicator Type	Connector Type	Model Number	Factory Preset psi (bar)
	Mechanical Pressure Switch	DIN EN 175301-803 Form A	670B94	22 (1.5) falling
	Solid State Pressure Sensor	M12	766B94#	17 (1.2) falling

# Not compatible with Basic Size 4 valves manufactured before 3/2021, e.g., DM2DDA4\*\*\*or DM2DNA4\*\*\*. For Basic Size 4 valves manufactured before 3/2021, use part number 670B94.




## ENERGY RELEASE VERIFICATION

Pressure Switches	Verification Type	Installation Location	Connector Type	Model Number	Factory Preset psi (bar)	Port Thread
	Electrical	Downstream	DIN EN 175301-803 Form A	586A86	5 (0.3) falling	1/8 NPT

Redundant Pressure Switch Assembly	Verification Type	Installation Location	Connector Type	Model Number	Factory Preset psi (bar)	Port Size
	Electrical (Dual)	Downstream	DIN EN 175301-803 Form A	RC026-13	5 (0.3) falling	3/8 NPT

### Connectors Pinout

Mechanical Pressure Switch		Solid State Pressure Sensor	
DIN EN 175301-803 Form A	M12	M12	
 <ul style="list-style-type: none"> <li>1 - Common</li> <li>2 - Normally Closed</li> <li>3 - Normally Open</li> <li>G - Ground</li> </ul>	 <ul style="list-style-type: none"> <li>1 - Common</li> <li>2 - Normally Closed</li> <li>3 - Not Used</li> <li>4 - Normally Open</li> </ul>	 <ul style="list-style-type: none"> <li>1, 2, 3, 4 - Pin</li> <li>PNP - Switched Positive</li> <li>NO - Normally Open</li> <li>NC - Normally Closed</li> </ul>	



## ELECTRICAL CONNECTORS

Pre-wired Connector Kits	Connection Type	Connector Type	Cable		Quantity	Length meters (feet)	Cord Diameter mm	Kit Number			
			End 1	End 2				Without Light	Lighted Connector		
									24 V DC	120 V AC	230 V AC
Solenoid and Status Indicator	DIN EN 175301-803 Form A	Connector	Flying leads	4	5 (16.4)	6	2283H77	2532H77-W	2532H77-Z	2532H77-Y	
				4	10 (32.8)	6	2284H77	2533H77-W	2533H77-Z	2533H77-Y	
	M12 5-pin, Female	Connector	Flying leads	4	5 (16.4)	6	2288H77	-	-	-	
				4	10 (32.8)	6	2289H77	-	-	-	

Pre-wired Connectors	Connection Type	Connector Type	Cable		Length meters (feet)	Quantity	Cord Diameter mm	Model Number			
			End 1	End 2				Without Light	Lighted Connector		
									24 V DC	120 V AC	230 V AC
Solenoid	DIN EN 175301-803 Form A	Connector	Flying leads	2 (6.5)	1	6	721K77	720K77-W	720K77-Z	720K77-Y	
							1	10	371K77	383K77-W	383K77-Z
Status Indicator	M12 5-pin, Female	Connector	Flying leads	5 (16.4)	1	6	2666H77	-	-	-	
							1	6	2667H77	-	-

Connectors (no cable)	Connection Type	Connector Type	Fitting Connection	Quantity	Cord Diameter mm	Model Number			
						Without Light	Lighted Connector		
							24 V DC	120 V AC	230 V AC
Solenoid	DIN EN 175301-803 Form A		Cable grip	1	8 to 10	937K87	936K87-W	936K87-Z	936K87-Y
			1/2" NPT conduit	1	-	723K77	724K77-W	724K77-Z	724K77-Y

### Connectors Pinout

Solenoid		Status Indicator	
DIN EN 175301-803 Form A	M12	DIN EN 175301-803 Form A	M12
<p>1 - Black 2 - Black G - Green/Yellow (Ground)</p>	<p>3 - Blue 4 - Black</p>	<p>1 - Brown 2 - Grey 3 - Black 4 - Green/Yellow (Ground)</p>	<p>1, 2, 3, 4 - Pin PNP - Switched Positive NO - Normally Open NC - Normally Closed</p>

# Accessories & Options

## JUNCTION BOX OPTIONS



Wiring Kits with J-Box	J-Box			Cable Connector Type		Length meters (feet)	Cable Quantity	Kit Number
	Connection Type		J-Box Quantity	End 1	End 2			
	Control System	Solenoids / Status Indicator						
10-pin Mini	M12 (5-pin)	1	M12	DIN EN 175301-803 Form A	1.0 (3.3)	4	2249H77	
			M12	M12	1.0 (3.3)	4	2250H77	

10-Pin MINI Cables	Connection Type	Cable Connector Type			Length meters (feet)	Cable Quantity	Kit Number
		End 1	End 2	Cable Conductors			
J-Box to Control System	10-pin Mini	Flying leads	18-gauge wire	3.7 (12)	1	2253H77	
				6.1 (20)	1	2254H77	
				9.1 (30)	1	2255H77	
				15.2 (50)	1	2256H77	

Outlet Port Pressure Monitoring Wiring Kit	Port Splitter			Cable Connector Type		Length meters (feet)	Cable Quantity	Kit Number
	Port Connectors	Number of Ports	Splitter Quantity	End 1	End 2			
						M12	3	1


### Connectors Pinout and Wiring Diagram

#### J-Box Wiring


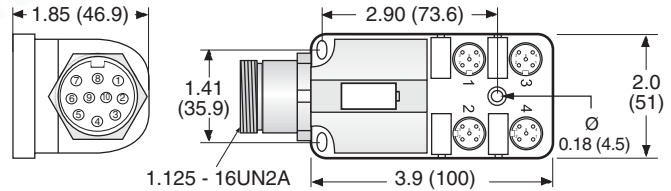
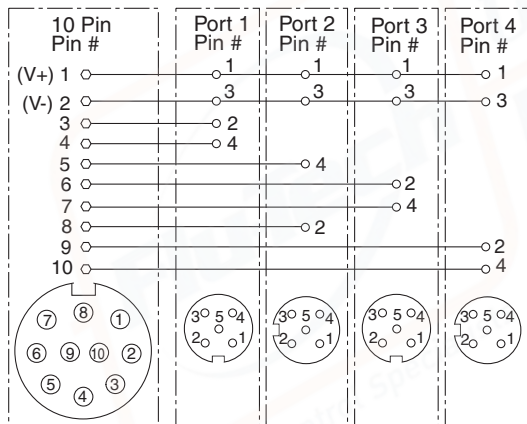


#### 10-Pin MINI Cable

PIN #	Wire Colors	PIN #	Wire Colors
1 +24 V DC	Orange	6 -	Orange w/Black
2 Common V DC	Blue	7 Remote Reset	Red
3 -	White w/Black	8 -	Green/Yellow
4 Solenoid A	Red w/Black	9 Remote Valve Fault Light	Black
5 Solenoid B	Green w/Black	10 Remote System OK Light	White




#### Outlet Port Pressure Monitoring – Port Splitter

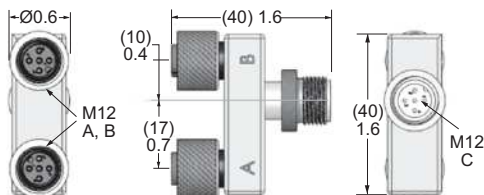

A & B Female  
C Male

## NOISE REDUCTION SILENCERS

High Flow Noise Reduction Silencer Kits	Valve Basic Size	Kit Number#*		
		R/Rp Thread	NPT Thread	
	4	2329H77	2324H77	
8	2329H77	2325H77		
12	2330H77	2326H77		
30	2331H77	2327H77		
<p># Exhaust Flange Kit required, see below ordering information.                      * Kits include all plumbing required for installation.                      ** Dimensions reflect valve with installed silencer.</p> <p>Reduces the Exponentially Perceived Noise (EPNdB), Impact noise reduction in the 35–40 dB range.                      Recommended for air exhaust applications for pressures up to 125 psig (8.6 bar).                      Pressure Range – 125 psig (8.6 bar) maximum.</p>				

Valve Basic Size	Flow scfm (L/s)	Dimensions** inches (mm)				Pressure Range psig (bar)
		Width	Height (R-RP)	Height (NPT)	Depth	
4	800 (378)	4.34 (110.2)	21.40 (543.6)	19.06 (484.1)	7.27 (184.7)	0-125 (0-8.6) maximum
8	800 (378)	5.41 (137.4)	23.52 (597.4)	21.18 (538.0)	8.41 (213.6)	
12	2080 (982)	6.74 (117.2)	28.20 (716.3)	25.85 (656.6)	10.66 (270.8)	
30	7200 (3398)	9.85 (250.2)	41.55 (1055.4)	41.55 (1055.4)	13.47 (342.1)	

Exhaust Flange Kits For Noise Reduction Silencers	Valve Basic Size	Valve Port Size	Kit Number	
			G Thread	NPT Thread
	4	1	D276B25	726B25
8	1	D617B25	617B25	
12	1-1/2	D619B25	619B25	
30	2-1/2	D621B25	621B25	

# Options

## RESET VALVES FOR DOUBLE VALVES WITH REMOTE RESET

Valves with the remote reset option require a small 3/2 reset valve and the installation of a 1/8 inch air line from the reset valve to the reset port of the double valve. ROSS offers 3/2 normally closed valves with either manual or electric control that are suitable for this purpose.

Compact Valves for Line Mounting	Miniature Valve for Base Mounting	Manual Palm Button Valves	Mushroom Valves
			

### Direct Solenoid Pilot Control – Compact Valves for Line Mounting

Valve Type	Port Size	Valve Model Number*						Flow C <sub>v</sub>	Average Response Constants**	
		G Thread			NPT Thread				M	F
		24 V DC	110-120 V AC 50/60 Hz	230 V AC 50/60 Hz	24 V DC	110-120 V AC 50/60 Hz	230 V AC 50/60 Hz			
Normally-Closed	1/8	D1613B1020W	D1613B1020Z	D1613B1020Y	1613B1020W	1613B1020Z	1613B1020Y	0.3	5	2.90

\* For other voltages, consult ROSS.

<b>**Valve Response Time</b>	The constants above, designated M and F, can be used to determine the amount of time required to fill or exhaust a volume of any size using the formula on the right:	<b>Vlv. Resp. Time (msec) = M + F *V</b> <b>M</b> = avg. time for parts movement <b>F</b> = msec. per cubic inch of volume <b>V</b> = volume in cubic inches
------------------------------	---	---

### Direct Solenoid Pilot Control – Miniature Valve for Base Mounting

Valve Type	Override Type	Valve Model Number*			Flow C <sub>v</sub>
		24 V DC	110-120 V AC 50/60 Hz	230 V AC 50/60 Hz	
Normally-Closed	Non-Locking	W1413A1409W	W1413A1409Z	W1413A1409Y	0.1

\* For other voltages, consult ROSS.

Sub-Base for Direct Solenoid Control Valves	Sub-Base Model Number	
	G Thread	NPT Thread
	D516B91	516B91

### Manual Palm Button Valves

Valve Operator Type	Port Size	Button Color	Valve Model Number		Flow C <sub>v</sub>
			G Thread	NPT Thread	
Heavy Duty Palm Button	1/4	Green	D1223B2001	1223B2001	0.8
		Red	D1223B2003	1223B2003	
Flush Pushbutton	1/4	Green	D1223B2FPG	1223B2FPG	0.9
		Red	D1223B2FPR	1223B2FPR	
Mushroom Button	1/4	Green	D1223B2MBG	1223B2MBG	
		Red	D1223B2MBR	1223B2MBR	



บริษัท ฟลูเทค จำกัด  
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถนนเทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270  
845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND  
Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th

## REPLACEMENT VALVES (VALVE ONLY NO BASE)

### MODEL NUMBER CONFIGURATOR

### 3-Way 2-Position Valves

**DM2D** | **X** | **B2X** | **A** | **1** | **X** | **005**

Series

Thread  
None

Basic Size	Port Size		
	Inlet	Outlet	
2	1/4	1/4	B2X
	3/8	3/8	
4	1/2	1/2	B4X
	1/2	3/4	
8	3/4	3/4	A5X
	1	1	
12	1	1	A6X
	1	1-1/2	
30	1-1/2	2	A8X

Reset Type	
Remote Air	1
Solenoid	2
Manual	4

Other Options*			
Connector	Description		
DIN EN 175301-803 Form A*	Solenoids	Connector not included	Leave Blank
	Solenoid Reset**		
M12 (24 V DC only)	Solenoids	Adapter DIN EN to M12 Connector included	005
	Solenoid Reset**		

\* See options for connectors or wiring kits.  
\*\* If solenoid reset type option is selected.

Status Indicator	
None	

Voltage*	
24 volts DC	A
110 volts AC, 50 Hz; 120 volts AC, 50/60 Hz	B
230 volts AC, 50/60 Hz	C**
12 volts DC	D
24 volts AC	E

\* For other voltages consult ROSS.  
\*\* 230 V AC not available in the U.S. (OSHA regulations limit press control voltage to no more than 120 volts AC).

## REPLACEMENT SUB-BASES

Valve Basic Size	Port Size		Status Indicator	Sub-Base Model Number		Weight lb (kg)
	Inlet	Outlet		G Thread	NPT Thread	
2	1/4	1/4	No	D1872C91	1872C91	1.7 (0.8)
			Yes	D1873C91	1873C91	2.1 (1.0)
	3/8	3/8	No	D1874C91	1874C91	1.7 (0.8)
			Yes	D1875C91	1875C91	2.1 (1.0)
4	1/2	1/2	No	D1697C91	1697C91	1.7 (0.8)
			Yes	D1698C91	1698C91	2.3 (1.1)
	1/2	3/4	No	D1699C91	1699C91	1.7 (0.8)
			Yes	D1700C91	1700C91	2.3 (1.1)
8	3/4	3/4	No	D1701C91	1701C91	3.6 (1.6)
			Yes	D1702C91	1702C91	4.2 (1.9)
	1	1	No	D1703C91	1703C91	3.6 (1.6)
			Yes	D1704C91	1704C91	4.2 (1.9)
12	1	1	No	D1705C91	1705C91	6.2 (2.8)
			Yes	D1706C91	1706C91	6.8 (3.1)
	1	1-1/2	No	D1707C91	1707C91	6.2 (2.8)
			Yes	D1708C91	1708C91	6.8 (3.1)
30	1-1/2	2	No	D1709C91	1709C91	12.0 (5.4)
			Yes	D1710C91	1710C91	12.6 (5.7)