

GENERAL


SMC inline mass Flowmeters are thermal dispersion type, utilizing the constant temperature difference method of measuring Gas Mass Flow Rate. It contains two reference grade platinum RTD sensors clad in a protective 316 SS sheath. Features include direct mass flow for gases, wide rangeability, low pressure drop, very low end sensitivity, and no moving parts. The SMC ATMF series is microprocessor based and does not have any potentiometers. Electronics can be Integral Style, or remote mount with rugged windowed dual compartment enclosure with local or remote display. Four models are available ranging from the low cost blind meters to the more advanced SP models. Calibration Self Check: Each meter has built in diagnostics - a display of the calibration mill watts (mw) can be used to check the sensor's operation by being compared to the original reported "zero flow" value noted on meter's Certificate of Conformance (last few lines) and metallic tag. This convenient field diagnostic procedure verifies that the original factory calibration hasn't drifted, shifted, or changed. This "Sensor Functionality and Zero Self Check" also verifies that the sensor is free from contamination, even without inspection.

FEATURES

- Direct mass flow measurement of any gas with actual gas calibration
- Opto-isolated outputs, with graphic display
- Tracking of overall gas consumption over a turndown ratio of at least 100:1
- Up to four independent, switchable flow curves
- High contrast photo-emissive OLED display with rate, total, temperature and graphic display
- User-selectable engineering units, dynamically converts the flow rate and total flow
- Can measure higher velocity than any other thermal mass meter - up to 203 m/s
- Display calibration mill watt (mw) for ongoing diagnostics
- Standard software available with multi-curve fit programs
- Low power dissipation; under 2W
- Flow conditioners included with all meters




SPECIFICATION

- | | | | |
|------------------------------|--|---|---|
| ● Process Connection : | Threaded, Flanged | ● Housing protection : | NEMA 4, Class 1, Div 1, Groups B, C, & D |
| ● Process temperature : | 149°C (300°F) | ● Ex-protection : | II 2 GD EEx d IIC T2 or T3 |
| ● Operating pressure : | 69 Barg (1000 PSIG) | |  |
| ● Mass Flow rate : | See model selection guide section | ● Cable (remote version) : | 300 meters |
| ● Flow units : | Kg/hr., Kg/mn, Kg/s Lb./hr., Lb./m Lb./s | ● Wetted materials : | 316 SSS (Hastelloy, etc..) |
| | NCMH, SCFM, NLPM, SLPM | ● weight (approximate) : | |
| | Mt/s, F/mn, BTU/Hr., BTU/min | ● Integral Type : | |
| ● Gas temperature effect : | 0.01% /° C | 1/4" to 1" | 1 to 4 Kg (2.2 - 8.8Lb) |
| ● Accuracy (and linearity) : | ±[1% of Reading + (.5% FS)] | 1 1/4" to 2 1/2" | 2-3 Kg (4.4 - 6.6Lb) |
| | ± 0.2% of Full Scale | 3" and 4" | 4-5 KG (8.81 - 22Lb) |
| ● Repeatability : | ± 0.25% of Full Scale | | |
| ● Turn down ratio : | Over 100:1 | ● Remote Type : | |
| ● Response time : | Less than one second | 1/4" to 1" | 3 to 6 Kg (6.6 - 13.2 Lb.) |
| ● Material : | 316SS as per DIN 1.4571 (AISI 316 Ti) | 1 1/4" to 2 1/2" | 6-8 Kg (13.2 - 17.6 Lb.) |
| ● Linear signal output : | 0-5 V _{DC} & 4-20 mA | 3" and 4" | 8-10 KG (17.6-22 Lb.) |
| ● Pulse output : | scalable | | |
| ● Relays : | Two 1-amp, SPDT | | |
| | User-selectable alarm functions | | |
| ● Display units : | Flow, Total flow, Switch settings | | |
| | Temperature, Elapsed time | | |
| ● RAM Back-up : | Lithium Battery | Notes:-weight +0.5 kg (1 Lb.) for 150# flanges + 1kg (2.2Lb) for 300# | |
| ● Data storage : | EPROM storage up to 10 years | ● Power requirements : | 115VAC @, 1/8 A 230VAC @ 1/16 A |
| ● | | | 24 VDC @ 1/4A |
| | | ● Power Consumption : | 2 Watts or less |
| ● Signal Interface : | RS232 & RS485, MODBUS, etc.. | ● NIST traceable : | Standard for all calibration |


ATMF8000IL "X" Dimensions

IN-LINE METER DIMENSIONS	
Pipe Size x Flow Body Length ³	Expl. Proof (B)
1/4" x 6"	7.33"
3/8" x 6"	7.39"
1/2" x 7"	7.45"
3/4" x 7"	7.58"
1" x 8"	7.70"
1-1/4" x 10"	7.83"
1-1/2" x 12"	7.95"
2" x 15"	8.20"
2-1/2" x 18"	8.45"
3" x 20"	8.70"
4" x 25"	9.20"


ATMF8000IL-SP-I (Integral)

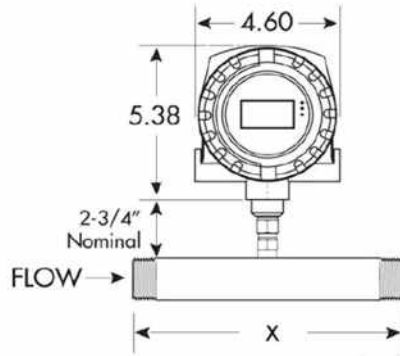


ATMF8000IL-SP-R (Remote)

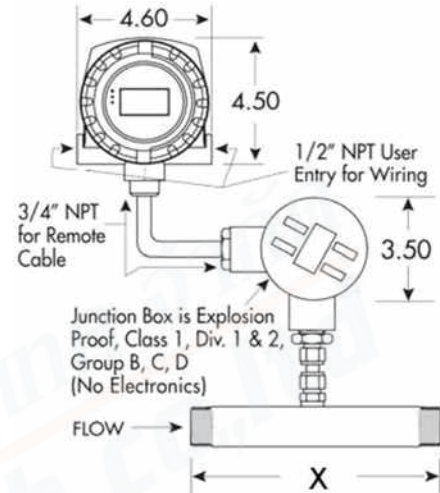


ATMF8000IL-SC-(Integral)



ATMF8000IL-SC (Remote)


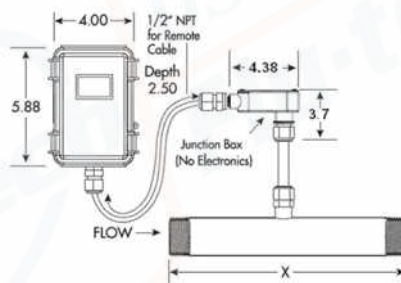


ATMF8000IL-SIX (Integral)


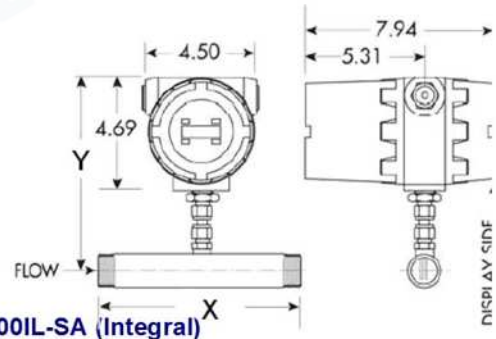


ATMF8000IL-SIX (Remote)


ATMF8000IL-SA (Integral)

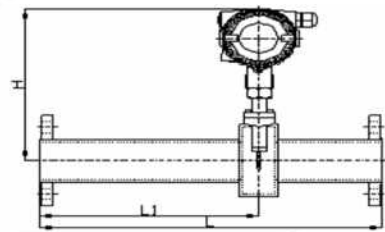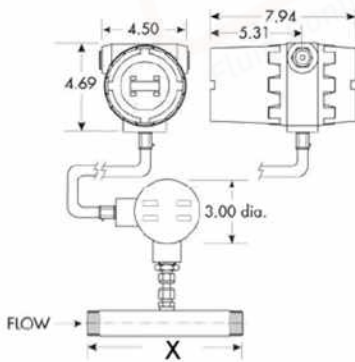

DN	40	50	80	100
H	220	230	250	260
L	445	445	405	405
L1	285	288	240	250

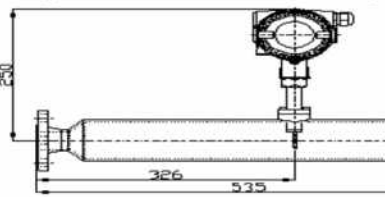

Flow Conditioning Screens FOR FLOW BODIES 1/2" AND UP¹



LENGTH "L" SAME AS NON-FLANGED METER (See table on page 31. For example, 1" flow body has an 8" length. The length will be the same whether an NPT flow body, or whether flanged. If a flanged flow body, the 8" dimension will be a Face-to-Face dimension.)




Screens shown with NPT fitting.

¹ Also, flow conditioning is also available for turbine flow applications.

Flanged Ends for In-Line Meter (OPTIONAL)



Flanges for 3/2" pipe sizes and up, have 8 bolt holes



Flanges for 3" pipe sizes and smaller have 4 bolt holes

ATMF8000IL-SIX



Heavy Industrial Windowed Explosion Proof Dual Compartment enclosure
Remote Explosion Proof Junction Box for remote mount option
ATEX Zone I, II 2 G Ex d IIB+H2 T6 Gb
Available in 12V_{DC}, 24V_{DC}, 115-230V_{AC} (under 6W)
Accuracy (and linearity) : $\pm 1\%$ of Reading + (.5% FS)
4-20 mA isolated output (optionally HART)
One dry contact relay (Pulsed Output, or Trip High or Trip Low)
RS232 communication and menuing software
Zero Calibration Self Check Diagnostics
Optional programmable USB dongle to adjust electronics
Displays rate, total, temperature and graphical flowrate,
Calibration mill watt (mw) displayed for ongoing diagnostics

ATMF8000IL-SP



Available in 12V_{DC}, 24V_{DC}, 115-230V_{AC} (2.5W)
Calibration self-check (built in diagnostics)
Available with MODBUS (IEEE 32 Bit floating point) and RS485
Remote Windowed Enclosure - Dual compartment
with separate terminal access, and explosion proof junction box
Accuracy (and linearity) : $\pm 1\%$ of Reading + (.5% FS)
CE, UL, CSA Ex proof Class1, Div1, Group B,C,D
Separate power and output terminals
Optional programmable USB dongle to adjust electronics
Displays rate, total, temperature and graphical flowrate,
Portable rechargeable barrier powered version available
Calibration mill watt (mw) displayed for ongoing diagnostics

ATMF8000IL-SC



Any Non-hazardous gases
Temperature -40° to 200°F (93°C), Optional to 300°F (149°C)
Accuracy (and linearity) : $\pm 1\%$ of Reading + (.5% FS)
Integral and remote styles
Digital system allows raw signal validation (milli-watts)
24 VDC or 115VAC/230 VAC
Photo-emissive OLED graphical display (Flow Rate, Totalizer, Temperature)
4 to 20 mA for Rate; 24VDC pulse for Totalized value
RS232 Communication
Modbus® compliant RS485 RTU communications (optional)
Field re-configurability via optional Addresser software

ATMF8000IL-SA



Low cost Air, O₂ and N₂ ONLY (0.3Nm/s~60Nm/s)
Temperature Range -40~+100°C (212°F)
Accuracy (and linearity) : $\pm 1\%$ of Reading + (.5% FS)
Integral windowed Nema 4X Enclosure
Remote Windowed Nema 4X with explosion proof junction box
AC85~265V or DC13.5~42V
2-Line Backlit Touch Screen Display & 4 Button Menuing Keypad
4~20mA@HART or RS-485
Maximum pressure 40 barg (580 PSIG)
Display - Mass , volumetric flow (normalized)
Total flow, Velocity and temperature

Gas Composition	NIST certified calibration is done with actual or equivalent gas - gas type or mixture MUST be given
Full Scale Flow	Maximum and minimum flow rates and unites MUST be provided
Line Size	Line size and connection MUST be provided (see selection guide below for options)
Gas Pressure and Temperature	Calibration is done at operating or maximum pressure and temperature
Electronics Temperature	Temperature of the environment surrounding the Flowmeters electronics.
Power Requirements	Specify requirements such as 12, 24 VDC or 115 VAC or 230 VAC
Configuration	See below transmitter styles

➤ Model Selection Guide

ATMF Series Inline meters												
Example ATMF-8000IL-SP-I-05-15"-TFC05-DC24-O2 (40 nmps, 40C and 12 Barg)												
AMF 8000 IL-		X	XXX	XXX	XXXXx	XXXXX"	XXXX	XXXXXXXXXX	XXX	XXXX	Description	
INTEGRAL INDUSTRIAL MASS FLOW METER (includes graphical display) (ATEX/CSA Exd)	SIX										Transmitter	
LOW COST MASS FLOW METER (Air, O2 and N2 ONLY (0.3Nm/s~60Nm/s)	SA											
Non-Hazardous MASS FLOW METER (includes graphical display)	SC											
INTEGRAL INDUSTRIAL MASS FLOW METER (includes graphical display) (CSA Exd)	SP											
Integral		I										Style
Remote		R										
¼" X 6"L IN-LINE FLOWBODY**			025								Connection	
¾" X 6"L IN-LINE FLOWBODY			030									
½" X 7"L IN-LINE FLOW BODY			050									
¾" X 7"L IN-LINE FLOW BODY w/ Flow Conditioners			075									
1" X 8"L IN-LINE FLOW BODY w/ Flow Conditioners			100									
1¼" X 10"L IN-LINE FLOWBODY w/ Flow			125									
1½" X 12"L IN-LINE FLOW BODY w/ Flow			150									
2" X 12"L IN-LINE FLOW BODY w/ Flow			200									
2½" X 12"L IN-LINE FLOWBODY w/ Flow			250									
3" X 12"L IN-LINE FLOW BODY w/ Flow Conditioners (Requires Flanges)			300									
4" X 12"L IN-LINE FLOW BODY w/ Flow Conditioners (Requires Flanges)			400									
TUBE VERSUS PIPE (Follows the Flow Body Product Code)			TUBE									
150LB ANSI RAISED FLANGED ENDS				S150FLG								
300LB ANSI RAISED FLANGED ENDS				S300FLG								
12 V _{DC}					12VDC						Power Supply	
24V _{DC}					24VDC							
110-115 V _{AC}					115VAC							
220-240V _{AC}					230VAC							
Put gas type and max velocity					Gas?						Gas	
OPTIONS (please contact SMC for others not included here)												
BASIC ADDRESSER SOFTWARE AND ULINX (RS485 TO USB) FOR SP models						ADDRESSER					Options	
ADVANCED RECONFIGURATION SOFTWARE FOR SP models (DOWNLOAD)						ADDRESSER PLU						
DONGLE ASSEMBLY W/ CABLE FOR SP model						DONGLEWCBL						
NON-STD CABLE LENGTH FOR REMOTE METERS -						CBL xxx						
AFTER-CAL DATA AND CERTIFICATE						CACERT						
HASTELLOY SENSOR						HSILS						
HIGH TEMP OPERATION (GAS FROM 200 - 350° F- 93°C to 177°C)						HTO1						
VERY HIGH TEMPERATURE OPERATION (GAS FROM 350 - 450°F 177°C to 232°C)						HTO2						
EXTREME HIGH TEMPERATURE OPERATION (GAS TO 750°F or 400 °C						HTO3						
Extra RANGES (up to four)only for SE and SG models						RG2						
OXYGEN FINAL CLEAN (with Certificate)						OFC						