



Series 1500 - Short stroke compact cylinders

General

Profiled tube has three "T" slots on the three sides hosting sensors 1500._, RS._, HS._ without adaptors and with adaptor code 1380.01F codes 1580._, MRS._, MHS._.

A complete range of clamps makes them easy to install under any conditions.

It is interesting to note that as these cylinders (from Ø 32 to Ø 100) have anchoring holes with the same lead and thread as those of series 1320 ISO 6431, they accept all mountings except for the intermediate trunnion.

Construction characteristics

Body	anodised aluminium
Rod	C43 chromed steel (stainless steel for magnetic cylinder Ø20 and Ø25)
Piston	aluminium
Rod bushing	anodised aluminium
End cap	anodised aluminium
Seals	Standard: NBR oil resistant rubber, PUR piston rod seals (HNBR or FPM seals available upon request)

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Max. pressure	10 bar
Working temperature	-5°C - +70°C with standard seals magnetic or non magnetic piston -5°C - +80°C with FPM seals magnetic piston -5°C - +80°C with HNBR seals magnetic piston -5°C - +120°C with HNBR seals non magnetic piston -5°C - +150°C with FPM seals non magnetic piston

Please follow the suggestions below to ensure a long life for these cylinders:

- use clean and lubricated air
- correct alignment during assembly with regard to the applied load so as to avoid radial components or bending the rod.
- avoid high speeds together with long strokes and heavy loads: this would produce kinetic energy which the cylinder cannot absorb, especially if used as a limit stop (in this case use mechanical stop device)
- evaluate the environmental characteristics of cylinder used (high temperature, hard atmosphere, dust, humidity etc.)

Please note: air must be dried for applications with lower temperature.

Use hydraulic oils H class (ISO VG32) for correct continued lubrication.

Our Technical Department will be glad to help.

Standard strokes

Double acting version

Series 1501, 1504, 1511, 1514, 1515, 1516, 1517 and 1518

for all bores from 5 to 50 mm every 5 mm.

On request are available strokes as follow:

Ø 20 and Ø 25 up to stroke 250 mm

Ø 32 e Ø 40 up to stroke 300 mm

Ø 50 e Ø 63 up to stroke 350 mm

Ø 80 e Ø 100 up to stroke 400 mm

Single acting version

Series 1502, 1503, 1512 and 1513:

For all bores from 5 to 10 mm.

On request are available strokes up to 50 mm

Type with non-rotating device:

Ø 20 and Ø 25 from 5 to 40 mm every 5 mm.

Ø 32 and Ø 40 from 5 to 50 mm every 5 mm.

Ø 50 and Ø 63 from 5 to 60 mm every 5 mm.


Ø 80 and Ø 100 from 5 to 80 mm every 5 mm.



Double acting version

Ordering code


1501.Ø.stroke standard seals
1501.Ø.stroke.V FPM seals
1501.Ø.stroke.T HNBR seals

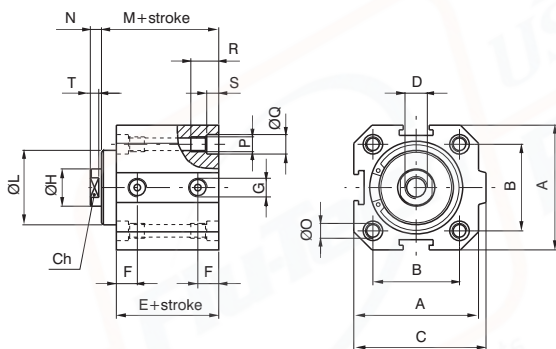

Double acting version with magnetic piston

Ordering code

1511.Ø.stroke standard seals
1511.Ø.stroke.V FPM seals
1511.Ø.stroke.T HNBR seals

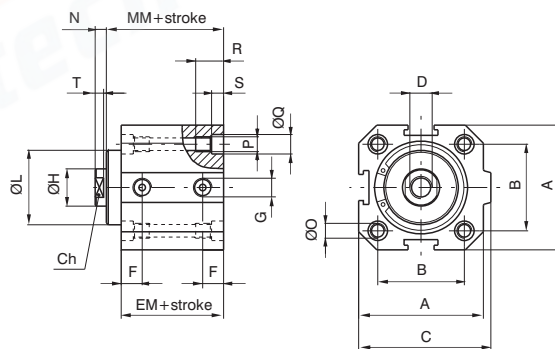

Bore	20	25	32	40	50	63	80	100
A	35	41	48	57	67	80	100	120
B	26	28	32,5	38	46,5	56,5	72	89
C	39,5	44,5	52	61	71	84	106	126
D	M4x8	M5x10	M6x12	M10x15	M12x18	M12x18	M16x20	M16x20
E	29	30,5	32	33,5	35	38	44	47
EM	34	35,5	37	38,5	40	43	49	52
F	9	9,15	9,75	10,5	11	11,25	13,75	15,25
G	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 3/8"	G 3/8"
Ø H	8	10	12	16	20	20	25	25
Ø L $\pm 0,05 \begin{pmatrix} 0 \\ -0,1 \text{ per } \varnothing 80 \text{ e } \varnothing 100 \end{pmatrix}$	17	20,5	26	31	39	40	55	55
M	32	33	35,5	39,5	43	46	51,5	54,5
MM	37	38	40,5	44,5	48	51	56,5	59,5
N	4	4	4	5	6	6	8	8
Ø O	4,3	5,3	5,3	5,3	7	7	9	9
P	M5	M6	M6	M6	M8	M8	M10	M10
Ø Q	7,5	8,5	8,5	8,5	10,5	10,5	13,5	13,5
R	15	18	18	18	22	22	30	30
S	4,5	5,5	5,5	5,5	6,5	6,5	8,5	8,5
T	3	3	3	4	4,5	4,5	5,5	5,5
Ch	6	8	10	13	17	17	22	22

Non magnetic

Weight g	stroke 0	75	110	170	260	400	600	800	1500
	every 10 mm.	20	30	40	60	80	100	120	145


Magnetic

Weight g	stroke 0	90	130	200	310	460	700	910	1620
	every 10 mm.	20	30	40	60	80	100	120	145

► Single acting version with front spring

Ordering code


1502.Ø.stroke standard seals
1502.Ø.stroke.V FPM seals
1502.Ø.stroke.T HNBR seals

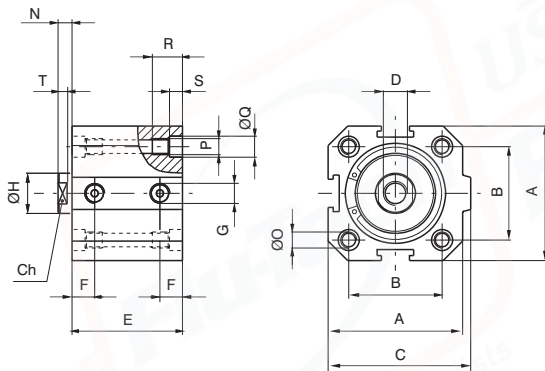

► Single acting version front spring with magnetic piston

Ordering code

1512.Ø.stroke standard seals
1512.Ø.stroke.V FPM seals
1512.Ø.stroke.T HNBR seals

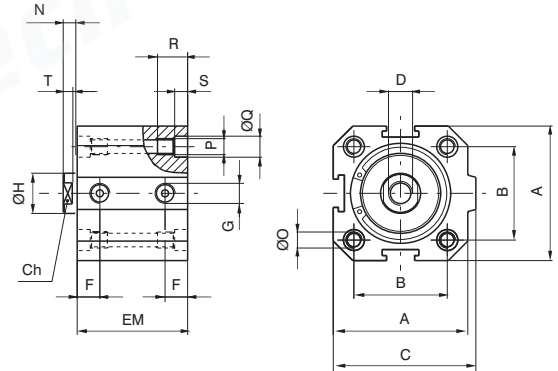

3

PNEUMATIC ACTUATION

Bore		20	25	32	40	50	63	80	100
A		35	41	48	57	67	80	100	120
B		26	28	32,5	38	46,5	56,5	72	89
C		39,5	44,5	52	61	71	84	106	126
D		M4X8	M5X10	M6X12	M10X15	M12X18	M12X18	M16X20	M16X20
E	stroke 5	29	30,5	32	33,5	35	38	44	47
	stroke 10	34	35,5	37	38,5	40	43	49	52
EM	stroke 5	34	35,5	37	38,5	40	43	49	52
	stroke 10	39	40,5	42	43,5	45	48	54	57
F		9	9,15	9,75	10,5	11	11,25	13,75	15,25
G		G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 3/8"	G 3/8"
Ø H		8	10	12	16	20	20	25	25
N		4	4	4	5	6	6	8	8
Ø O		4,3	5,3	5,3	5,3	7	7	9	9
P		M5	M6	M6	M6	M8	M8	M10	M10
Ø Q		7,5	8,5	8,5	8,5	10,5	10,5	13,5	13,5
R		15	18	18	18	22	22	30	30
S		4,5	5,5	5,5	5,5	6,5	6,5	8,5	8,5
T		3	3	3	4	4,5	4,5	5,5	5,5
Ch		6	8	10	13	17	17	22	22

Non magnetic

Weight g	stroke 5	70	105	160	250	370	550	750	1440
	stroke 10	80	120	180	280	410	600	810	1500

Magnetic

Weight g	stroke 5	85	125	190	300	430	650	860	1560
	stroke 10	95	140	210	330	470	700	920	1620




Compact cylinders Series 1500 - Short stroke cylinders

Single acting version with rear spring

Ordering code


1503.Ø.stroke standard seals
1503.Ø.stroke.V FPM seals
1503.Ø.stroke.T HNBR seals

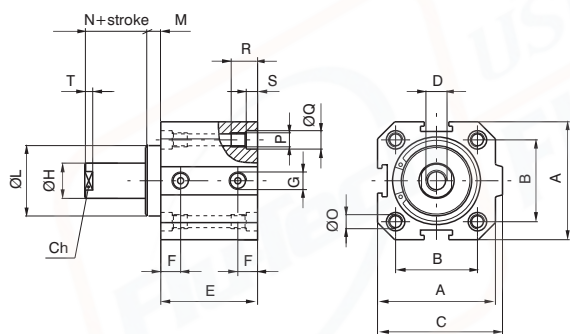

Single acting version rear spring with magnetic piston

Ordering code

1513.Ø.stroke standard seals
1513.Ø.stroke.V FPM seals
1513.Ø.stroke.T HNBR seals

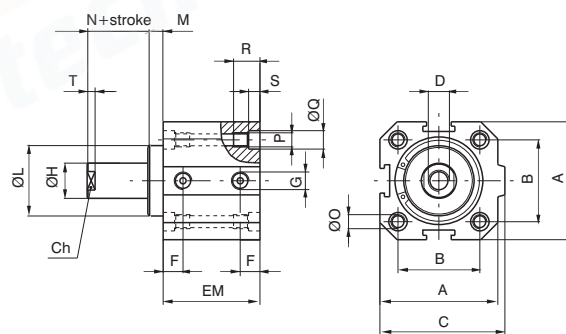

Bore		20	25	32	40	50	63	80	100
A		35	41	48	57	67	80	100	120
B		26	28	32,5	38	46,5	56,5	72	89
C		39,5	44,5	52	61	71	84	106	126
D		M4X8	M5X10	M6X12	M10X15	M12X18	M12X18	M16X20	M16X20
E	stroke 5	29	30,5	32	33,5	35	38	44	47
	stroke 10	34	35,5	37	38,5	40	43	49	52
EM	stroke 5	34	35,5	37	38,5	40	43	49	52
	stroke 10	39	40,5	42	43,5	45	48	54	57
F		9	9,15	9,75	10,5	11	11,25	13,75	15,25
G		G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 3/8"	G 3/8"
Ø H		8	10	12	16	20	20	25	25
Ø L ±0,05 (⁰ / _{-0,1} per Ø90 e Ø 100)		17	20,5	26	31	39	40	55	55
M		3	2,5	3,5	6	8	8	7,5	7,5
N		4	4	4	5	6	6	8	8
Ø O		4,3	5,3	5,3	5,3	7	7	9	9
P		M5	M6	M6	M6	M8	M8	M10	M10
Ø Q		7,5	8,5	8,5	8,5	10,5	10,5	13,5	13,5
R		15	18	18	18	22	22	30	30
S		4,5	5,5	5,5	5,5	6,5	6,5	8,5	8,5
T		3	3	3	4	4,5	4,5	5,5	5,5
Ch		6	8	10	13	17	17	22	22

Non magnetic

Weight g	stroke 5	70	105	160	250	370	550	750	1440
	stroke 10	80	120	180	280	410	600	810	1500


Magnetic

Weight g	stroke 5	85	125	190	300	430	650	860	1560
	stroke 10	95	140	210	330	470	700	920	1620

► Double acting through rod cylinder version

Ordering code


1504.Ø.stroke standard seals
1504.Ø.stroke.V FPM seals
1504.Ø.stroke.T HNBR seals

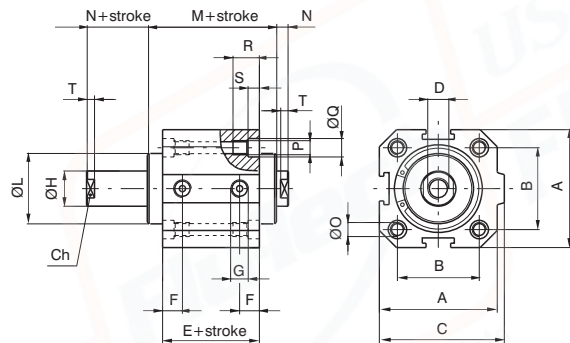

► Double acting through rod cylinder version with magnetic piston

Ordering code

1514.Ø.stroke standard seals
1514.Ø.stroke.V FPM seals
1514.Ø.stroke.T HNBR seals

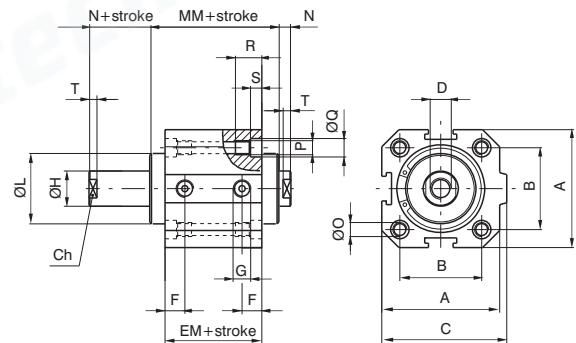

Bore	20	25	32	40	50	63	80	100
A	35	41	48	57	67	80	100	120
B	26	28	32,5	38	46,5	56,5	72	89
C	39,5	44,5	52	61	71	84	106	126
D	M4X8	M5X10	M6X12	M10X15	M12X18	M12X18	M16X20	M16X20
E	29	30,5	32	33,5	35	38	44	47
EM	34	35,5	37	38,5	40	43	49	52
F	9	9,15	9,75	10,5	11	11,25	13,75	15,25
G	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 3/8"	G 3/8"
Ø H	8	10	12	16	20	20	25	25
Ø L ±0,05 (0,1 per Ø80 e Ø 100)	17	20,5	26	31	39	40	55	55
M	35	35,5	39	45,5	51	54	59	62
MM	40	40,5	44	50,5	56	59	64	67
N	4	4	4	5	6	6	8	8
Ø O	4,3	5,3	5,3	5,3	7	7	9	9
P	M5	M6	M6	M6	M8	M8	M10	M10
Ø Q	7,5	8,5	8,5	8,5	10,5	10,5	13,5	13,5
R	15	18	18	18	22	22	30	30
S	4,5	5,5	5,5	5,5	6,5	6,5	8,5	8,5
T	3	3	3	4	4,5	4,5	5,5	5,5
Ch	6	8	10	13	17	17	22	22

Non magnetic

Weight	stroke 0	90	130	200	320	460	670	1100	1680
g	every 10 mm.	20	35	50	70	90	110	155	185


Magnetic

Weight	stroke 0	105	160	240	380	530	740	1210	1820
g	every 10 mm.	20	35	50	70	90	110	155	185

Tandem with opposed rods

Ordering code


1515.Ø.stroke.stroke 1 standard seals
1515.Ø.stroke.stroke 1.V FPM seals
1515.Ø.stroke.stroke 1.T HNBR seals
1515.Ø.stroke.stroke 1.M standard seals, magnetic piston
1515.Ø.stroke.stroke 1.MV FPM seals, magnetic piston
1515.Ø.stroke.stroke 1.MT HNBR seals, magnetic piston

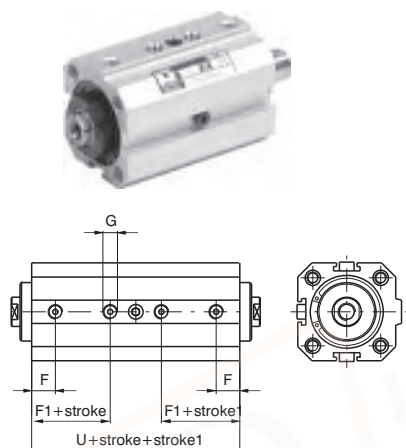

Tandem push with common rods

Ordering code


1516.Ø.stroke standard seals
1516.Ø.stroke.V FPM seals
1516.Ø.stroke.T HNBR seals
1516.Ø.stroke.M standard seals, magnetic piston
1516.Ø.stroke.MV FPM seals, magnetic piston
1516.Ø.stroke.MT HNBR seals, magnetic piston

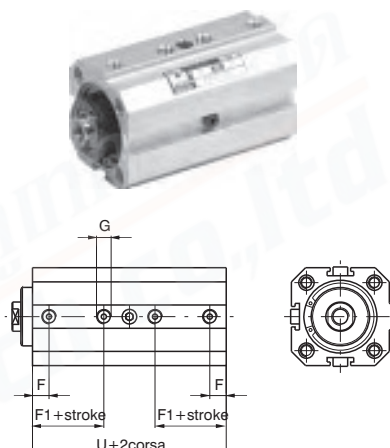

Tandem push with independent rods

Ordering code


1517.Ø.stroke.stroke 1 standard seals
1517.Ø.stroke.stroke 1.V FPM seals
1517.Ø.stroke.stroke 1.T HNBR seals
1517.Ø.stroke.stroke 1.M standard seals, magnetic piston
1517.Ø.stroke.stroke 1.MV FPM seals, magnetic piston
1517.Ø.stroke.stroke 1.MT HNBR seals, magnetic piston

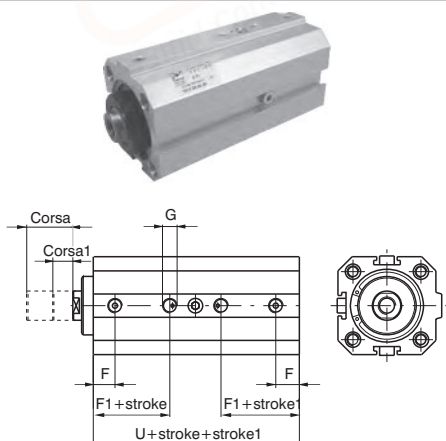

Opposed tandem with common rods

Ordering code

1518.Ø.stroke.stroke 1 standard seals
1518.Ø.stroke.stroke 1.V FPM seals
1518.Ø.stroke.stroke 1.T HNBR seals
1518.Ø.stroke.stroke 1.M standard seals, magnetic piston
1518.Ø.stroke.stroke 1.MV FPM seals, magnetic piston
1518.Ø.stroke.stroke 1.MT HNBR seals, magnetic piston

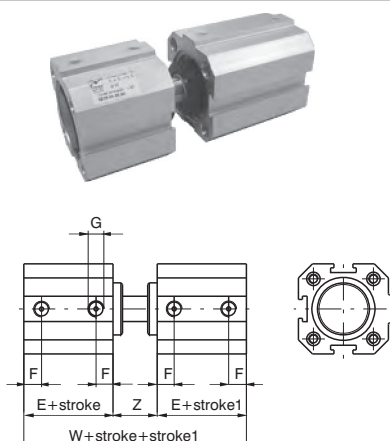

Bore	20	25	32	40	50	63	80	100
E	29	30,5	32	33,5	35	38	44	47
F	9	9,15	9,75	10,5	11	11,25	13,75	15,25
F1	17,5	18,35	19,75	20,5	21,5	24,25	24,75	26,25
G	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 1/8"	G 3/8"	G 3/8"
U	59	60,5	67	68,5	70	78	89	97
W	72	74	79	89	98	104	119	125
Z	14	13	15	22	28	28	31	31

Variations with magnetic piston

E	34	35,5	37	38,5	40	43	49	52
F1	22,5	23,35	24,75	25,5	26,5	29,25	29,75	31,25
U	69	70,5	77	78,5	80	88	99	107
W	82	84	89	99	108	114	129	135

► Double acting version

Ordering code



1501.Ø.stroke.AR standard seals
1501.Ø.stroke.AR.V FPM seals
1501.Ø.stroke.AR.T HNBR seals

► Double version with magnetic piston


Ordering code

1511.Ø.stroke.AR standard seals
1511.Ø.stroke.AR.V FPM seals
1511.Ø.stroke.AR.T HNBR seals

Cylinders with non-rotating device

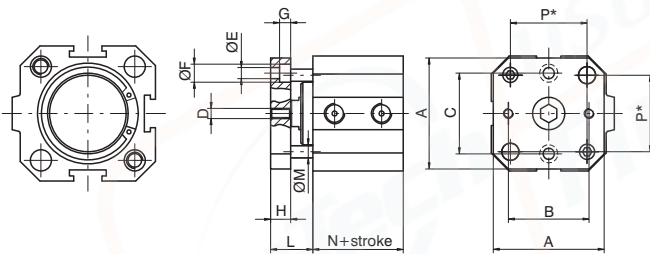

* = Distance between rods centres

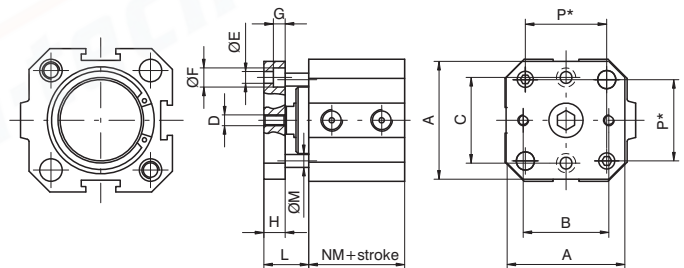

* = Distance between rods centres


It is possible, upon request to have four holes threaded and with counter bores in order to rear mount the cylinder as if it was standard.

Bore	20	25	32	40	50	63	80	100
A	35	40	45	55	65	80	100	120
B	22	26	32	40	50	62	82	103
C	22	28	34	40	50	62	82	103
D	M4	M5	M5	M5	M6	M6	M8	M8
Ø E	4,5	5,5	5,5	5,5	6,5	8,5	8,5	8,5
Ø F	7,5	9	9	9	10,5	13,5	13,5	13,5
G	4,5	5,5	5,5	5,5	6,5	8,5	8,5	8,5
H	8	8	10	10	12	12	15	15
L	15	14,5	17,5	21	26	26	30,5	30,5
Ø M	6	6	6	6	8	8	10	10
N	29	30,5	32	33,5	35	38	44	47
NM	34	35,5	37	38,5	40	43	49	52
P	26	28	32,5	38	46,5	56,5	72	89
Max. suggestion stroke	40	40	50	50	60	60	80	80
Weight	stroke 0	40	50	70	90	200	250	490
g		5	5	5	5	10	10	20

Rear clevis

Ordering code

1500.Ø.09F

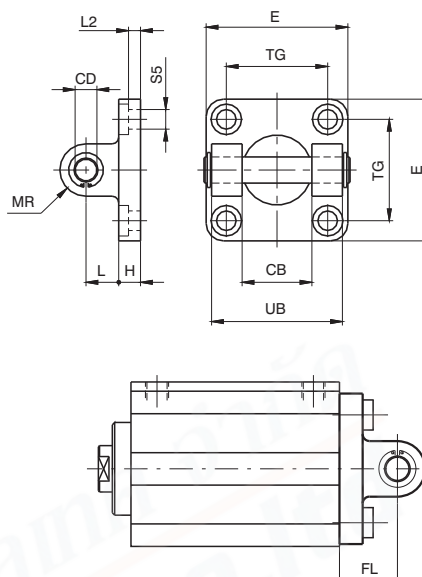


This allows anchorage of the cylinder both parallel and at a right angle to the plane; the cylinder rod can oscillate and self-align as necessary. It is made of aluminium alloy and painted black.

Bore	20	25	32	40	50	63	80	100
CB (h 9)	16	20	26	28	32	40	50	60
CD (H 9)	8	10	10	12	12	16	16	20
E	35	40	45	52	65	75	95	115
H	6	8	9	9	11	11	14	14
L	12	12	13	16	16	21	22	27
MR	8	9	10	12	12	16	16	20
TG	26	28	32,5	38	46,5	56,5	72	89
UB	35	40	45	52	60	70	90	110
FL	18	20	22	25	27	32	36	41
L2	/	/	5,5	5,5	6,5	6,5	10	10
S5 (H13)	5,5	6,6	6,6	6,6	9	9	11	11
Weight g	45	75	80	130	185	310	530	910

Rear clevis male

Ordering code

1500.Ø.09/1F

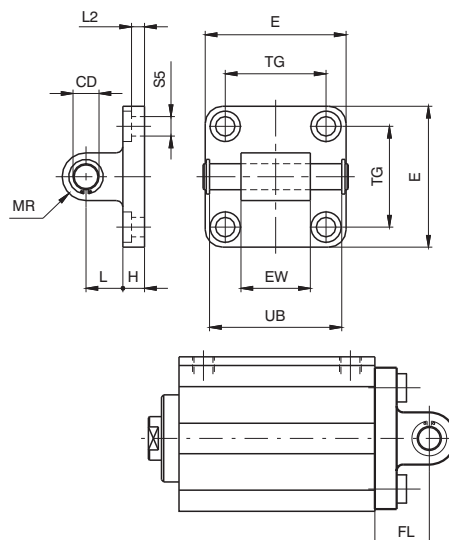

This allows anchorage of the cylinder both parallel and at a right angle to the plane; the cylinder rod can oscillate and self-align as necessary. It is made of aluminium alloy and painted black.



Bore	20	25	32	40	50	63	80	100
CD (h 9)	8	10	10	12	12	16	16	20
E	35	40	45	52	65	75	95	115
EW	16	20	26	28	32	40	50	60
H	6	8	9	9	11	11	14	14
L	12	12	13	16	16	21	22	27
MR	8	9	10	12	12	16	16	20
TG	26	28	32,5	38	46,5	56,5	72	89
UB	35	40	46	53	61	71	91	111
FL	18	20	22	25	27	32	36	41
L2	/	/	5,5	5,5	6,5	6,5	10	10
S5 (H 13)	5,5	6,6	6,6	6,6	9	9	11	11
Weight g	53	85	90	130	190	340	580	960

every 10 mm

Slot fixing screws

Ordering code

1500.15F (from Ø20 to Ø32)
1500.16F (from Ø40 to Ø63)
1500.18F (Ø80 and Ø100)

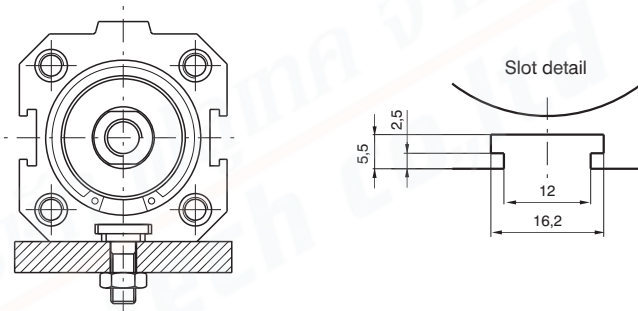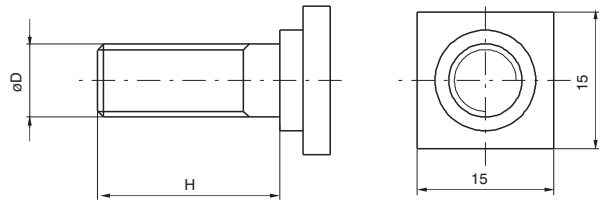

Example mounted with square headed screws on the plane.

Bore	20	25	32	40	50	63	80	100
ØD	M6	M6	M6	M8	M8	M8	M10	M10
H	15	15	15	20	20	20	25	25
Weight g	10			18			25	


Nipple with ISO standard thread

Ordering code

1500.Ø.17F



Fitted on the female thread of the compact cylinders, restore the ISO configurations rod (ISO 6432 for cylinders Ø 20 and Ø 25; ISO 6431 for cylinders from Ø 32 to Ø 100).

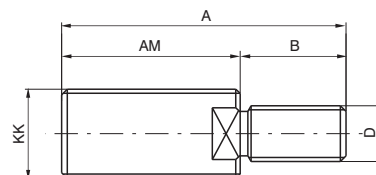

Bore	20	25	32	40	50	63	80	100
KK	M8x1,25	M10x1,25	M10x1,25	M12x1,25	M16x1,5	M16x1,5	M20x1,5	M20x1,5
AM	20	22	22	24	32	32	40	40
A	26	30	32	36	47	47	58	58
B	6	8	10	12	15	15	18	18
D	M4	M5	M6	M10	M12	M12	M16	M16
Weight g	8	15	16	27	65	65	110	110