


Technical details


Connection	Namur
Nominal size	5 mm
Flow rate	KN-063: 210 NI/min, KN-065: 290 NI/min
Weight	0.170 kg
Temperature range	-25°C ... +70°C
Medium	Filtered, oil-free and dried compressed air according to ISO 8573-1:2010, Class 7:2:4, instrument air, free of aggressive additives. Differing the pressure dew point must be at least 10°C below lowest occurring ambient temperature.
Materials	Body: Al (anodized) seals: NBR inner parts: brass
	Valves in accordance with 2014/34/EU (ATEX) available. (Chapter 13)




Flow control valves for speed regulation of pneumatically operated actuators. Mounting between NAMUR valve and actuator. Adjustable with screwdriver or manually. The location pin, screws and seals are included.

3/2-way



KN-063-DRS
 for 3/2-way-valves,
 adjustable with screwdriver



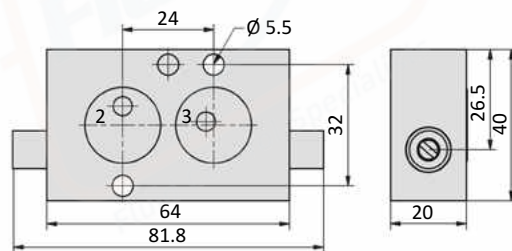
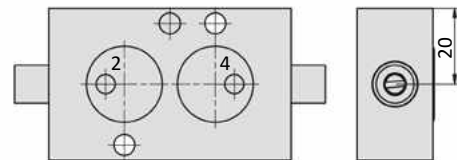
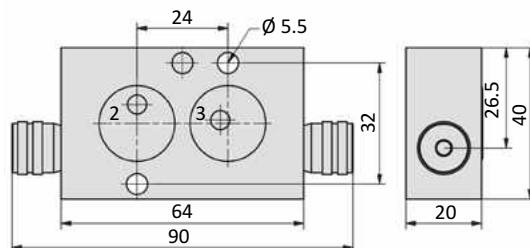
KN-063-DRH
 for 3/2-way-valves,
 manually adjustable

5/2- and 5/3-way


KN-065-DRS
 for 5/2-way- and 5/3-way-valves,
 adjustable with screwdriver



KN-065-DRH
 for 5/2-way- and 5/3-way-valves,
 manually adjustable

Dimensions
KN-063-DRS

KN-065-DRS

KN-063-DRH

KN-065-DRH
