



Vibrating level switch

- For universal applications such as limit level detection or dry run protection system
- Installation without adjustment
- Smallest installation dimensions
- Available in IO-Link version

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 2030 Pneumatically operated 2/2 way diaphragm valve CLASSIC with plastic body	▶
	Type 8644 Remote Process Actuation Control System AirLINE	▶
	Type 2301 Pneumatically operated 2 way Globe Control Valve	▶
	Type 8619 multiCELL - Multi-channel and multi-function transmitter/controller	▶

Type description

The Type 8110 is a filling level switch for liquids, using a tuning fork as the sensor element.

It is designed for industrial use in all areas of process technology and can be used in liquids. Typical applications are overflow or dry run protection.

The small tuning fork (40 mm in length) can be used in vessels, tanks and tubes.

Due to the simple and rugged measuring system, the 8110 is virtually unaffected by the chemical and physical features of the liquid. It works even under unfavourable measurement conditions such as turbulence, air bubbles, foam generation (not suitable for measuring the foam thickness itself), adhesions, strong external vibrations or varying filling materials.

The digital interface IO-Link allows bidirectional data transfer with any IO-Link Master. Data access is done by using the available standardized IODD. IO-Link is in accordance to the specification version 1.0.

Table of contents

1. General Technical Data	3
2. Product versions	4
2.1. Vibrating level switch with PNP transistor output.....	4
2.2. Vibrating level switch with contactless electronic switch output.....	4
2.3. Vibrating level switch with IO-Link output	5
3. Materials	5
3.1. Chemical Resistance Chart – Bürkert resistApp.....	5
3.2. Material specifications	6
4. Dimensions	6
4.1. G ½" or NPT ½" connection	6
4.2. G ¾" or NPT ¾" connection	7
4.3. G 1" or NPT 1" connection	7
4.4. Clamp 2" connection	8
5. Performance specifications	8
5.1. Temperature derating diagram	8
G or NPT connection	8
Clamp connection.....	8
6. Product installation	9
6.1. Installation notes.....	9
7. Product operation	9
7.1. Measuring principle	9
8. Ordering information	10
8.1. Bürkert eShop – Easy ordering and quick delivery.....	10
8.2. Bürkert product filter	10
8.3. Ordering chart.....	10
8.4. Ordering chart accessories.....	11

1. General Technical Data

Note:

The vibrating level switch is available with transistor (PNP) output or with contactless electronic output. The technical data depends on the vibrating level switch version. The common technical data are described in this chapter and detailed information on the specifics can be found in chapter "2. Product versions" on page 4.

Product properties

Material

Please make sure the device materials are compatible with the fluid you are using.

Detailed information can be found in chapter "3.1. Chemical Resistance Chart – Bürkert resistApp" on page 5.

Detailed information about material specifications can be found in chapter "3.2. Material specifications" on page 6

Dimensions Detailed information can be found in chapter "4. Dimensions" on page 6.

Surface quality Ra < 3.2 µm (thread) / Ra < 0.8 µm (clamp)

Measured variable Limit level of liquids.

Operating mode

- Min./max: changeover by electrical connection
 - Max.: max. detection or overflow protection
 - Min.: min. detection or dry run protection
- LED indication:
 - Green (voltage supply on)
 - Yellow (vibrating element covered)
 - Red (fault)

Weight Approx. 250 g

Performance data

Dynamic viscosity η 0.1...10000 mPa.s

Density Standard sensitivity: 0.7...2.5 g/cm³ (High sensitivity: 0.5...2.5 g/cm³ on request)

Flow velocity Max. 6 m/s (with a viscosity of 10000 mPa.s)

Hysteresis Approx. 2 mm with vertical installation

Switching delay Approx. 500 ms (On/Off)

Electrical data

Operating voltage Depending on the device version
Detailed information can be found in chapter "2. Product versions" on page 4.

Power Source (not supplied) Limited power source according to UL/EN 60950-1 standards or limited energy circuit according to UL/EN 61010-1 §9.4

Power consumption Max. 0.5 W

Current consumption Depending on the device version
Detailed information can be found in chapter "2. Product versions" on page 4.

Resonance frequency Approx. 1100 Hz

Output

- Transistor output PNP
- Contactless electronic switch
- Digital output in IO-Link operation

Media data

Process temperature -40...+100 °C (-40...+212 °F) (+150 °C (+302 °F) for clamp process connection)

Process pressure -1...64 bar/-100...6400 kPa (-14.51...+928.64 PSI)

Process/Port connection & communication

Process connection Thread G or NPT, ½", ¾" or 1"; clamp 2"

Electrical connection Depending on the device version
Detailed information can be found in chapter "2. Product versions" on page 4.

Approvals and certificates

Standards

Degree of protection according to IEC/EN 60529 Depending on the device version
Detailed information can be found in chapter "2. Product versions" on page 4.

Overvoltage category according to IEC 61010-1 Category III

Protection class according to IEC 61010-1 Depending on the device version
Detailed information can be found in chapter "2. Product versions" on page 4.

Directives

CE directives

The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable).

Environment and installation

Ambient temperature

- Operating on the housing: -40...+70 °C (-40...+158 °F)
- Storage and transport: -40...+80 °C (-40...+176 °F)

Temperature derating

Detailed information can be found in chapter **"6.1. Installation notes"** on page 9.

Relative air humidity

20...85 %, without condensation

2. Product versions**2.1. Vibrating level switch with PNP transistor output****Electrical data**

Operating voltage

9.6...35 V DC

Load current

Max. 250 mA (output, permanently short-circuit proof)

Voltage loss

Max. 3 V DC

Switching voltage

Max. 34 V DC

Blocking current

< 10 µA

Process/Port connection & communication

Electrical connection

Cable plug acc. to EN 175301-803 or M12 × 1 male fixed connector

Approvals and certificates**Standards**

Degree of protection according to IEC/ EN 60529

- IP65 with cable plug EN 175301-803 mounted and tightened
- IP66/IP67 with M12 × 1 plug mounted

Protection class according to IEC 61010-1

II

2.2. Vibrating level switch with contactless electronic switch output**Electrical data**

Operating voltage

- 20...253 V AC, 50/60 Hz
- 20...253 V DC

Load current

- Min. 10 mA
- Max. 250 mA

Process/Port connection & communication

Electrical connection

M12 × 1 male fixed connector

Approvals and certificates**Standards**

Degree of protection according to IEC/ EN 60529

IP66/IP67 with M12 × 1 plug mounted

Protection class according to IEC 61010-1


I

2.3. Vibrating level switch with IO-Link output

Electrical data	
Operating voltage (V+)	9.6...35 V DC
Max. resistive load	$R_A \leq 0.5 \text{ k}\Omega$
Switching current	<ul style="list-style-type: none"> • With IO-Link: communication (C)-Switching output 1 (Q1) noted C/Q1: 100 mA • Switching output 2 (Q2): 250 mA
Switching voltage	\geq operating voltage (V+) - 2.7 V CC
Power consumption	Max. 0.5 W
Cable	3-wire unshielded cable, max. 20 m
Process/Port connection & communication	
Electrical connection	M12 × 1 male connector
Digital communication: IO-Link	
Communication interface	IO-Link device V1.1, downward compatible to V1.0
Baud rate (data transfer rate)	COM 3 (230.4 kBaud)
Cycle time	Min. 2 ms
IO device description (IODD)	Depending on the ordered measurement range See "Device Description Files" on the website in the Software chapter Type 8110 ► or available at https://ioddfinder.io-link.com
Approvals and certificates	
Standards	
Degree of protection according to IEC/ EN 60529	IP66/IP67 with M12 × 1 plug mounted
Protection class according to IEC 61010-1	II

3. Materials

3.1. Chemical Resistance Chart – Bürkert resistApp

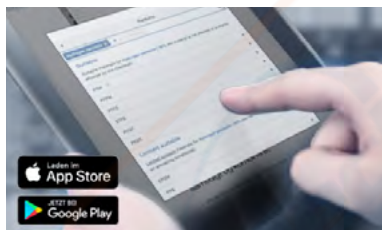


Bürkert resistApp – Chemical Resistance Chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start Chemical Resistance Check](#)

3.2. Material specifications

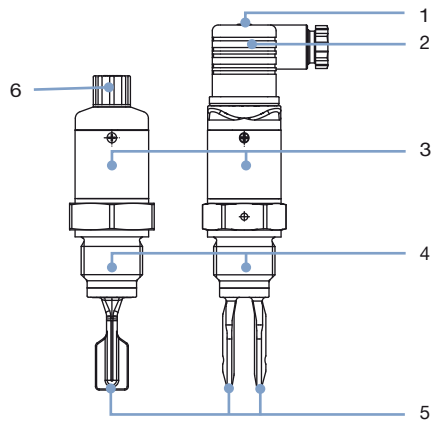


No.	Element	Material
1	Screw	Stainless steel
2	Cable plug EN175301-803	<ul style="list-style-type: none"> Contact support, housing plug in PA Contact surface in Sn Plug seal in silicone
3	Housing	Plastic PEI (Polyetherimide) and stainless steel 316L (1.4404)
4	Process connection	Stainless steel 316L (1.4435)
5	Tuning fork	Stainless steel 316L (1.4435)
6	Multipin M12 × 1 cable plug with cap	<ul style="list-style-type: none"> Contact support in PA Contacts in CuZn, nickel layer and 0.8 µm gold-plated Plug seal in FKM
–	Process seal (not shown)	NBR with aramid fibres

4. Dimensions

4.1. G ½" or NPT ½" connection

Note:


Dimensions in mm

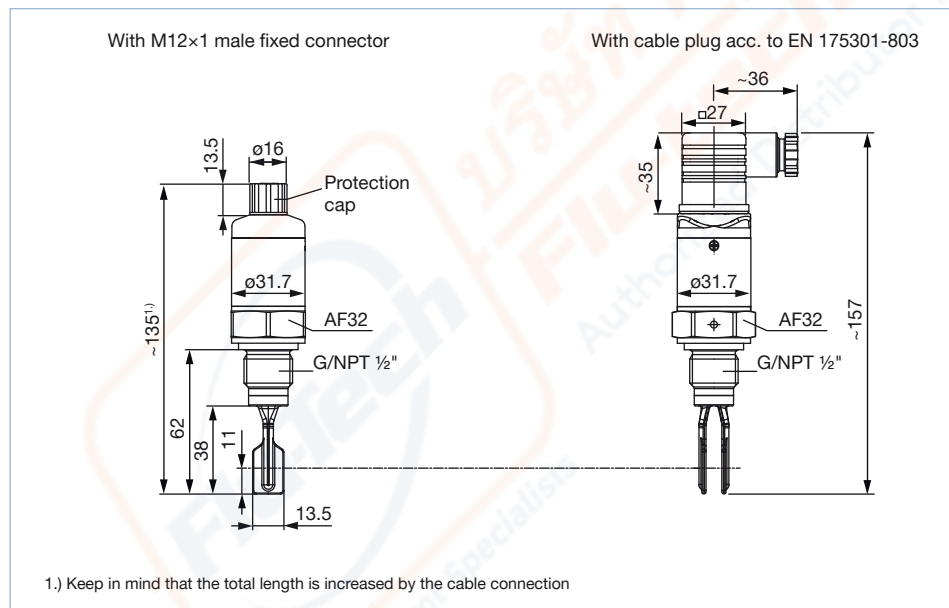

4.2. G 3/4" or NPT 3/4" connection

Note:


Dimensions in mm

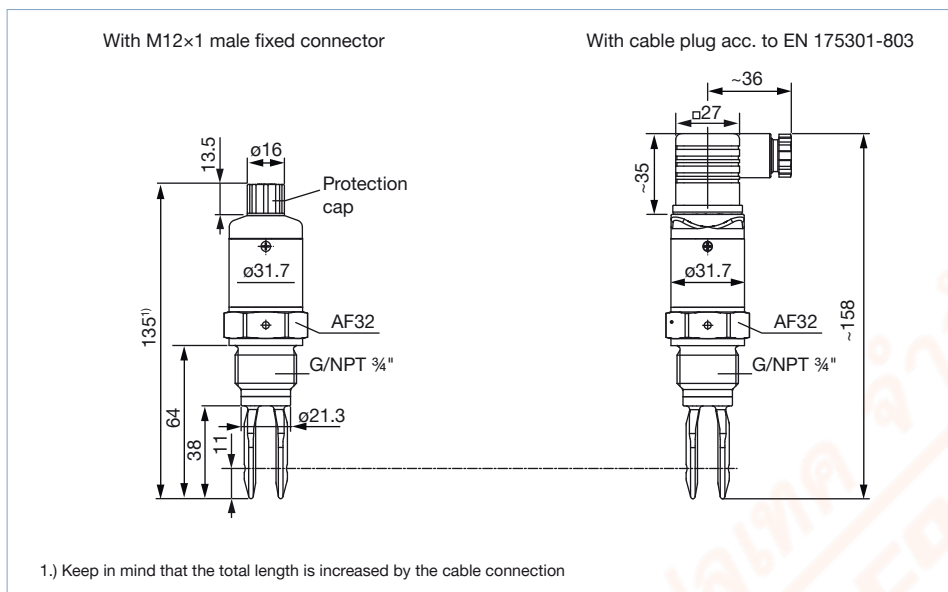

4.3. G 1" or NPT 1" connection

Note:


Dimensions in mm

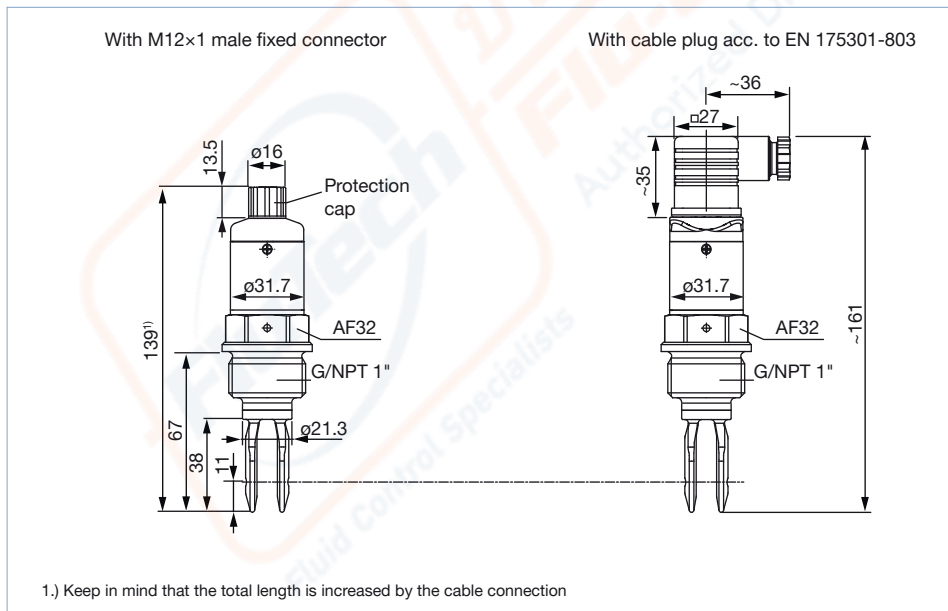

4.4. Clamp 2" connection

Note:


Dimensions in mm

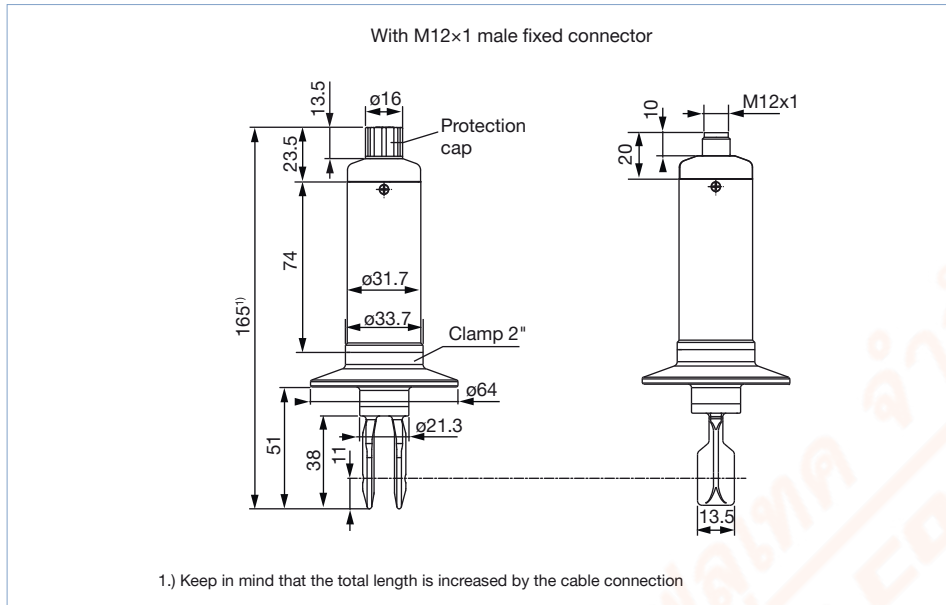


5. Performance specifications

5.1. Temperature derating diagram

G or NPT connection

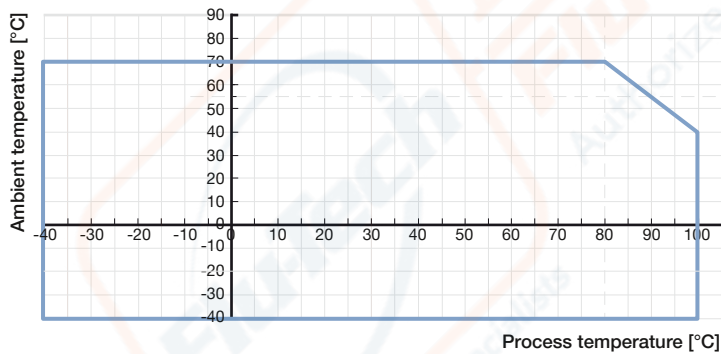

Clamp connection

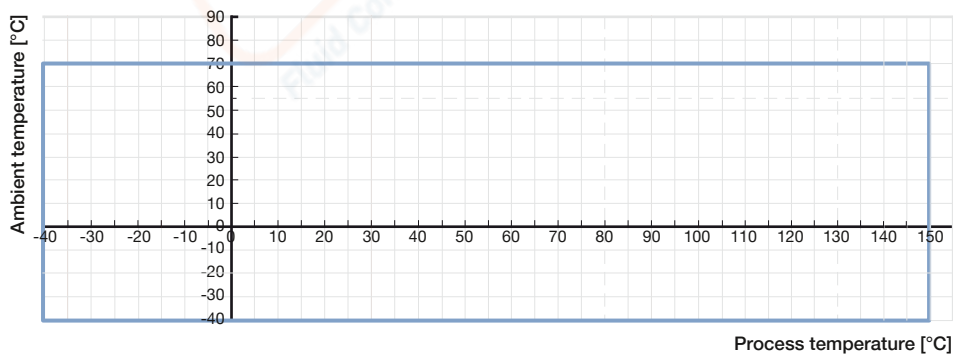

Visit product website ►

8 | 12

6. Product installation

6.1. Installation notes

Note:

- **Inflowing material:**


If the Type 8110 vibrating level switch is mounted in the filling stream, unwanted switching signals can be generated. Mount the switch at a location in the vessel where no disturbing influence from e.g. filling openings, agitators, etc. can occur.

- **Flow:**

If there is movement within the product, the tuning fork of the switch should be mounted in such a way that the surfaces of the fork are parallel to the product movement

The 8110 vibrating level switch can be installed in any position. The instrument only has to be mounted in such a way that the tuning fork is at the height of the desired switching point.

The switching point refers to the medium water ($1 \text{ g/cm}^3/0.036 \text{ lbs/in}^3$). Please keep in mind that the switching point of the instrument shifts when the medium has a different density than water.

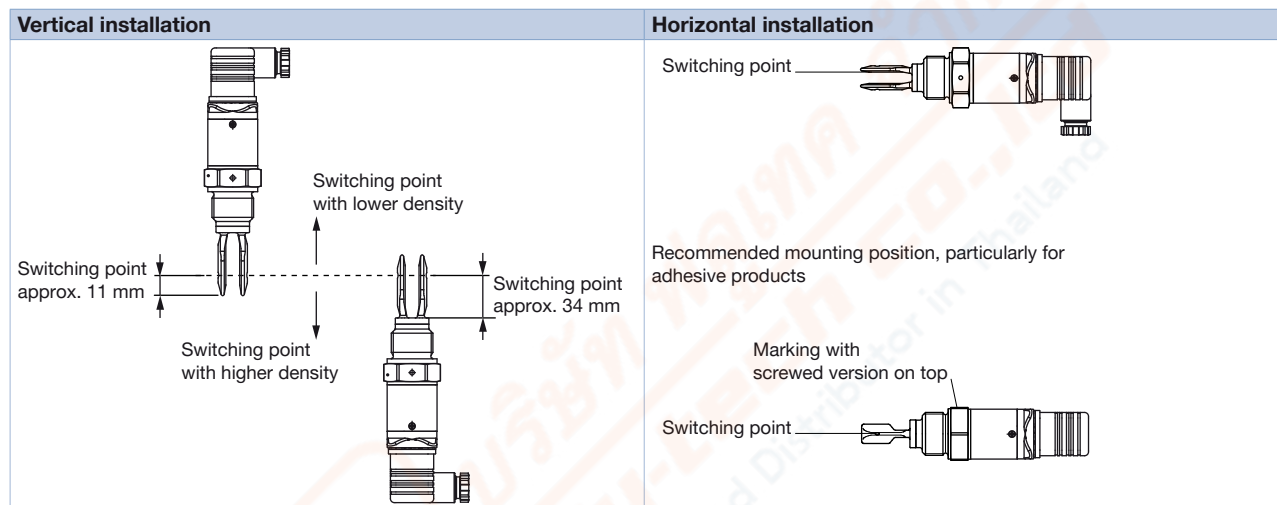

7. Product operation

7.1. Measuring principle

The tuning fork is piezoelectrically energised and vibrates at a mechanical resonance frequency of approx. 1100 Hz. When the tuning fork is submerged in the product, the frequency changes. This change is detected by the integrated oscillator and converted into a switching command.

The integrated fault monitor detects the following faults:

- Interruption of the connection cable to the piezoelectric elements
- Extreme material wear on the tuning fork
- Breakage of the tuning fork
- Absence of vibration.

If one of these faults is detected or in case the power supply fails, the electronic system switches to a defined switching state, e.g. the relay de-energises (safe state).

8. Ordering information

8.1. Bürkert eShop – Easy ordering and quick delivery



Bürkert eShop – Easy ordering and fast delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

8.2. Bürkert product filter






Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.


[Try out our product filter](#)

8.3. Ordering chart

Output	Operating voltage	Process connection	Electrical connection	Article no.
Transistor PNP	9.6...35 V DC	G ½"	Cable plug EN 175301-803	563554
			Multipin M12 × 1	563474
		NPT ½"	Cable plug EN 175301-803	563556
			Multipin M12 × 1	563555
		G ¾"	Cable plug EN 175301-803	555291
			Multipin M12 × 1	555290
		NPT ¾"	Cable plug EN 175301-803	560986
			Multipin M12 × 1	557154
		G 1"	Cable plug EN 175301-803	555293
			Multipin M12 × 1	555292
		NPT 1"	Multipin M12 × 1	557155
		Clamp 2"	Multipin M12 × 1	555294
Contactless electronic switching output (not with PLC)	20...253 V AC, 50/60 Hz or 20...253 V DC	G ¾"	Connecteur multibroche M12 × 1	555296
		G 1"		555298
IO-Link	9.6...35 V DC	G ¾"		572025
		NPT ¾"		572026
		Clamp 1"		572027
		Clamp 2"		572028

Further versions on request	
 Process connection <ul style="list-style-type: none"> Clamp 1"; 1½" DIN 11851 SMS 	 Hygienic Ra < 0.8 µm for G or NPT threaded connection
 Electrical connection Quick on connection (IP65)	

8.4. Ordering chart accessories

Description	Article no.
5 pin M12 female connector moulded on cable (2 m, shielded)	438680 
5 pin M12 female cable connector with plastic threaded locking ring	917116 