


# Digital 4 digit LCD display TIMER




## ■ Specification

Item		FPC-XY-3801H	FPC-XY-3801L
Input	Voltage	110~240V AC/DC	7~36V AC/DC
	Power consumption	10mA MAX	20mA MAX
Output	Output type	Relay output	
	Output mode	On-Off(re-cycle) , Off-On(re-cycle) , On-Off (one time)	
	Output current	2A MAX	
Display	Basic description	4-digit LCD display	
	Status display	Green numbers=ON , Red mumbes=OFF	
	Adjustment mode	LCD flashes	
Time setting	ON	1 sec. to 99Hrs-59min-59sec	
	OFF	1 sec. to 99Hrs-59min-59sec	
IP class		IP65	
Electrical connection		Input / Output : DIN43650A	
Insulation voltage		100V AC 1 minute	
Insulation resistance		50MΩ (500VDC)	
Shock proof		Maximum 100m/S <sup>2</sup> , 3 times each in 3 axes and 6 directions	
Ambient temperatruce		Ambient temperature of application: -10~70°C, storage : -20~80°C	
Environment humidity		Environment humidity of application: 35~90%RH	

## ■ Panel introduction

NO.	Description
1	Mode Button
2	ADD Button
3	Enter Button
4	Reset Button
5	Green numbers=ON Red numbers=OFF

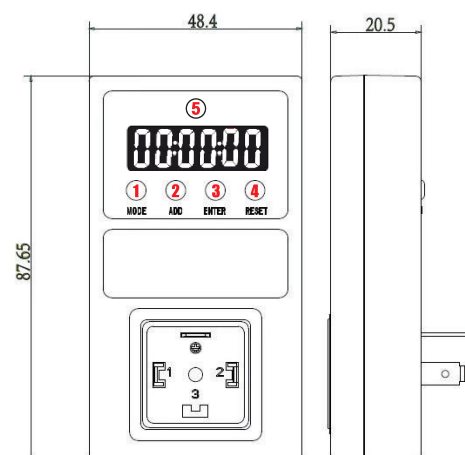

บริษัท ฟลูเทค จำกัด  
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270

845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND  
Tel. 0 2384 6060, Fax 0 2384 5701, Email : pneumatic@flutech.co.th, www.flutech.co.th