

MINIATURE Lubricators

L50, L50-Y Models Port Sizes: 1/8, 1/4



Model Shown: L50-2

SPECIFICATIONS

Ambient/Media Temperature:

Plastic bowl: 40° to 125°F (4° to 52°C).
Metal bowl: 40° to 150°F (4° to 66°C).

Body: Aluminum.

Bowl: 2-Ounce (60-ml) capacity polycarbonate plastic; optional aluminum bowl.

Fluid Media: Compressed air.

Inlet Pressure:



Plastic bowl: 150 psig (10 bar) maximum.
Metal bowl: 200 psig (14 bar) maximum.

Oil Adjustment: Internal, tamper-proof.

Seals: Nitrile.

- ◆ Inline mounting.
- ◆ High-strength polycarbonate plastic bowl; optional aluminum bowl.
- ◆ Low-flow models (L50Y) are designed to deliver oil in extremely low-flow (less than 1 scfm) situations.
- ◆ Wick-feed design in both standard-flow and low-flow lubricators.
- ◆ Internal tamper-proof adjustment.
- ◆ **NPTF** port threads; optional **BSPP** threads.

FLOW CHARTS

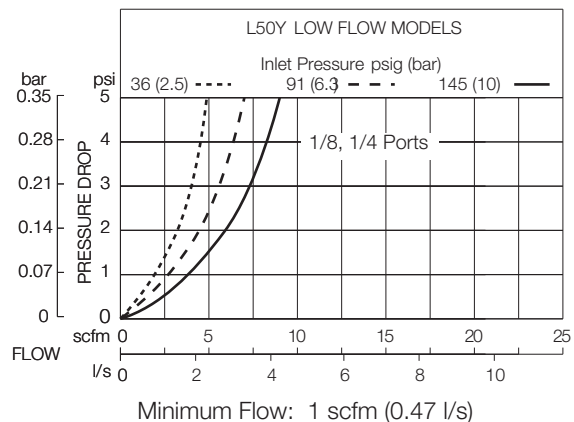
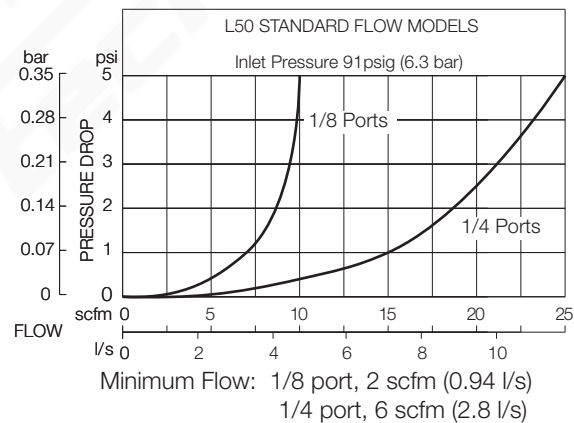


AUTHORIZED DISTRIBUTOR



DIMENSIONS inches (mm)

Bowl	A	B	C	Depth	Weight
					lb (kg)
Plastic	1.6 (41)	3.6 (91)	0.7 (17)	1.6 (41)	0.21 (0.10)
Metal	1.6 (41)	3.8 (97)	0.7 (17)	1.6 (41)	0.21 (0.10)

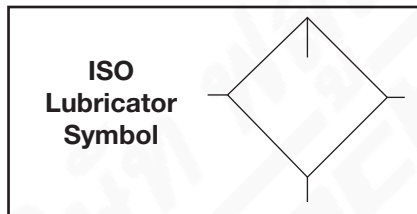

ORDERING INFORMATION

Change the letters in the sample model number below to specify the lubricator you want.

L50 - 2 X W

BOWL TYPE

Plastic (standard flow)..... L50
 Plastic (low flow)L50-Y
 Metal (standard flow) BL50
 Metal (low flow)..... BL50-Y

PORT SIZE

1/8 NPTF..... 1
 1/4 NPTF..... 2

PORT TYPE

NPTF threads Leave Blank
 BSPP threads W

OPTIONS: (More than one option can be chosen. Add in alphabetical order)

None Leave Blank
 Quick-fill Q-cap..... Q
 Tapped modified head to T
 to allow 50-01 bracket assy.

MINIATURE Lubricator, L50 and L50-Y Series

AUTHORIZED DISTRIBUTOR



LINE flutech.co.th

0 2384 6060

www.flutech.co.th

sales@flutech.co.th