

# Full-Size VANGUARD Modular Lubricators

# L28W Models Port Sizes: 1/4, 3/8, 1/2, 3/4



Model Shown: L28W-4

- ◆ Modular or inline mounting.
- ◆ High-strength polycarbonate plastic bowl with steel shatterguard. Optional zinc bowl.
- ◆ Wick-feed design.
- ◆ External adjusting knob.
- ◆ NPTF port threads; optional BSPP threads.

## SPECIFICATIONS

### Ambient/Media Temperature:

Plastic bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 175°F (4° to 79°C).

### Adjusting Knob: Acetal.

### Body: Zinc.

**Bowl:** 8-Ounce (240-ml) capacity polycarbonate plastic with steel shatterguard. Optional zinc bowl.

**Bowl Ring:** Aluminum.

**Fluid Media:** Compressed air.

### Inlet Pressure:

Plastic bowl: 150 psig (10 bar) maximum.


Metal bowl: 200 psig (14 bar) maximum.

**Oil Adjustment:** External.

**Seals:** Nitrile.

## FLOW CHART

Inlet Pressure: 100 psig (7 bar)

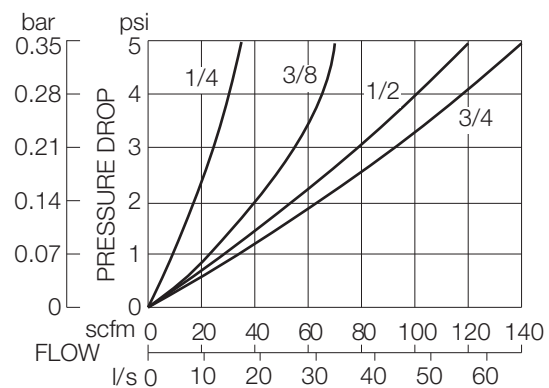

Minimum Flow: 6 scfm (2.8 l/s)

AUTHORIZED DISTRIBUTOR



LINE [flutech.co.th](http://flutech.co.th)



0 2384 6060

[www.flutech.co.th](http://www.flutech.co.th)

[sales@flutech.co.th](mailto:sales@flutech.co.th)

## DIMENSIONS inches (mm)

Bowl	A	B	C	Depth	Weight lb (kg)
Plastic	3.5 (89)	5.2 (132)	0.7 (17)	3.5 (89)	2.25 (1.02)
Metal	3.5 (89)	5.3 (135)	0.7 (17)	3.5 (89)	2.85 (1.30)

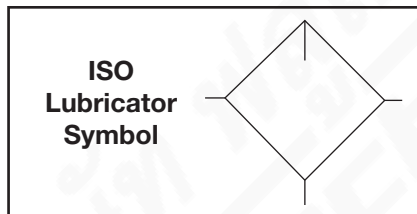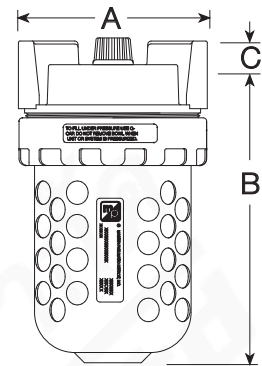

## ORDERING INFORMATION

Change the letters in the sample model number below to specify the lubricator you want.

**L28W - 2 Y W**

### BOWL TYPE

8-Ounce plastic .....L28W  
8-Ounce metal .....BL28W

### PORT SIZE

1/4 NPTF..... 2  
3/8 NPTF..... 3  
1/2 NPTF..... 4  
3/4 NPTF..... 6

### PORT TYPE

NPTF threads ..... Leave Blank  
BSPP threads ..... W

### OPTIONS

None ..... Leave Blank  
Quick-fill Q-cap..... Q

AUTHORIZED DISTRIBUTOR

