



## 5/2-way solenoid valve for pneumatic applications

- Compact design
- Second connection for shut-off function
- Low power consumption
- Fast switching times

Product variants described in the data sheet may differ from the product presentation and description.

### Can be combined with



**Type 8640** ▶  
Modular valve island for pneumatics



**Type 8644** ▶  
Remote Process Actuation Control System AirLINE



**Type MKRS** ▶  
Redundancy valve block for safety related shut-off function



**Type 8647** ▶  
AirLINE SP – electro-pneumatic automation system



**Type 2505** ▶  
10 mm socket for Bürkert small solenoid valves

### Type description

Type 6525 consists of a pilot flipper solenoid valve Type 6144 and a pneumatic seat valve. The flipper action system allows the switching of high pressures combined with low power consumption and short switching times. All the valves are equipped with manual override as standard.



## Table of contents

<b>1. General technical data</b>	<b>3</b>
<b>2. Circuit functions</b>	<b>3</b>
<b>3. Dimensions</b>	<b>4</b>
3.1. Standard version 5/2 way .....	4
3.2. Second connection shut-off function 5/2 way.....	4
<b>4. Product design and assembly</b>	<b>5</b>
4.1. Product assembly .....	5
Standard version 5/2 way .....	5
4.2. Distinguishing features valve revisions .....	6
<b>5. Ordering information</b>	<b>7</b>
5.1. Bürkert eShop – Easy ordering and quick delivery.....	7
5.2. Bürkert product filter .....	7
5.3. Ordering chart standard version .....	7
5.4. Ordering chart second connection for shut-off function .....	8
5.5. Ordering chart for accessories .....	8

## 1. General technical data

Product properties	
Dimensions	Detailed information can be found in chapter "3. Dimensions" on page 4.
Material	
Seal	FKM, NBR and PUR
Body	PPS, PA
Weight	21 g
Manual override	Standard
Orifice	DN 4.0
Pneumatic module	With plug-in coupling, Ø 6 mm, Ø ¼"
Circuit function	H Detailed information can be found in chapter "2. Circuit functions" on page 3.
Performance data	
Nominal operating mode	Continuous operation (100 % ED)
Switching frequency	Approx. 1000 c.p.m.
Switching time <sup>1)</sup>	Opening: < 10 ms Closing: < 10 ms
Electrical data	
Operating voltage	24 V DC <sup>2)</sup>
Nominal power	0.8 W
Voltage tolerance	± 10 %
Medium data	
Operating medium	Lubricated, oil-free, dry compressed air, neutral gases (5 µm filter recommended)
Medium temperature	- 10 °C...+ 50 °C
Process/Port connection & communication	
Electrical connection	Rectangular plug with raster 5.08 mm
Approvals and certificates	
Degree of protection	IP40 with rectangular cable plug
Protection class	3 acc. to VDE 0580
Environment and installation	
Installation position	As required, preferably with actuator upright
Mounting	With 2 screws M2 x 20
Ambient temperature	- 10 °C...+ 55 °C

1.) Measurement acc. to ISO 12238

2.) 10 % residual ripple allowed

## 2. Circuit functions

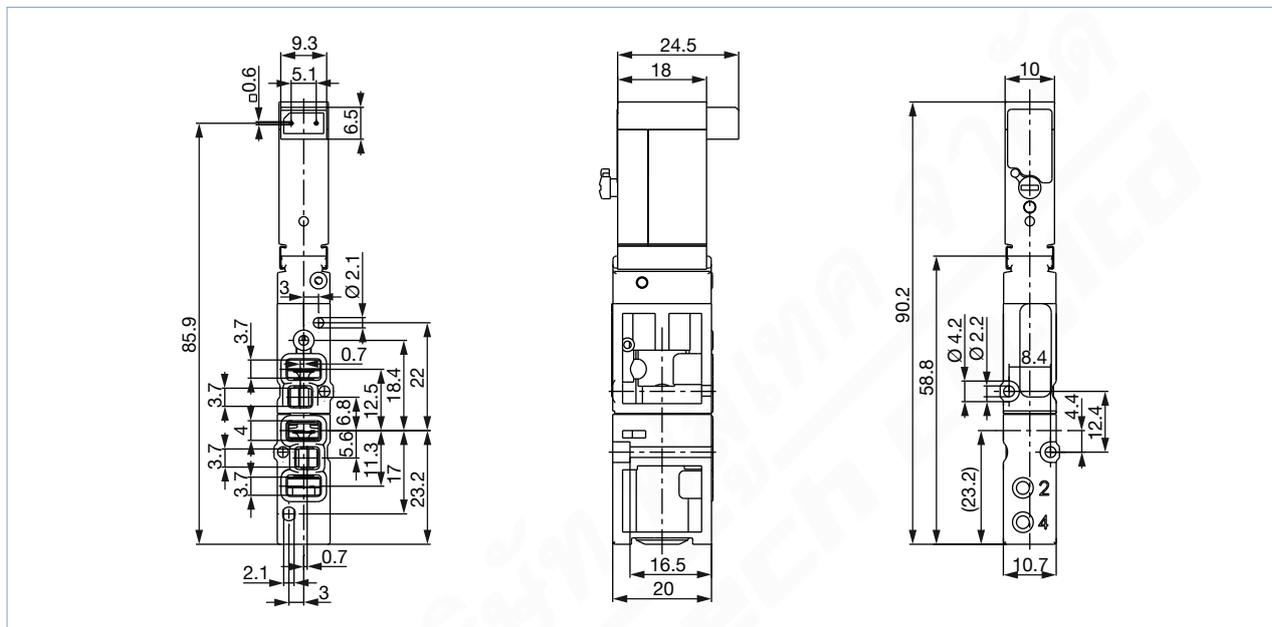
Circuit function	Description
	<b>Type: H, solenoid valve</b> 5/2 way Servo-controlled, pilot air and manual mode Pressure applied via port (1), therefore one of the two ports (2) or (4) is under pressure.
	<b>Type: H, solenoid valve</b> 5/2 way Servo-controlled There is always one of the two outlet ports (2) or (4) pressurized when coil is activated.

### 3. Dimensions

#### 3.1. Standard version 5/2 way

**Note:**

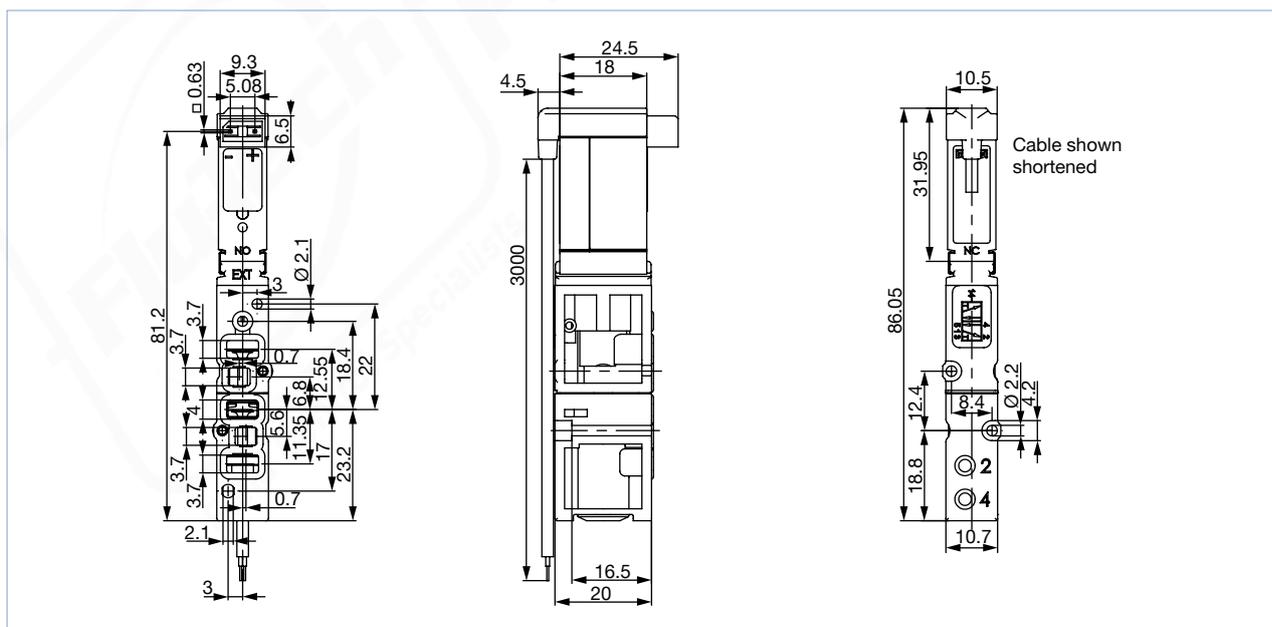
- For Type 6525 a standardisation of the pneumatic flange pattern has been made.
- There is a difference in the versions of the flange patterns. The external dimensions remain identical.
- Dimensions in mm



#### 3.2. Second connection shut-off function 5/2 way

**Note:**

Dimensions in mm

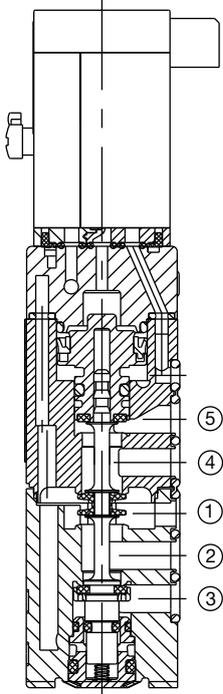



DTS 1000021455 EN Version: O Status: RL (released | freigegeben | valide) printed: 16.05.2022

## 4. Product design and assembly

### 4.1. Product assembly

#### Standard version 5/2 way

Sectional drawing	Connection overview	Circuit function
		<p><b>H</b></p> 

DTS 1000021455 EN Version: O Status: RL (released | freigegeben | validé) printed: 16.05.2022

#### 4.2. Distinguishing features valve revisions

**Note:**

- For type 6525, 3/2-way, the pneumatic flange pattern has been standardised.
- There is a difference in the versions of the flange patterns (Rev. 1/Rev. 2). The external dimensions remain identical.
- Before the pneumatic installation, the compatibility with the present valve terminal must be checked (see operating instructions of the corresponding valve terminal).

The valve revisions can be distinguished by the following features:

Valves 6525	Valve REV. 1	Valve REV. 2
Article no.	Distinguishing by Article no. see <b>"5. Ordering information"</b> on page 7	
Visual distinction		
Information label	There is a corresponding information label on the relevant valve which indicates that the valve has been overhauled. This information label must be removed before assembly.	
Compatibility with the pneumatic modules of the island by means of the working ports	 black parallel	 blue wavy

DTS 1000021455 EN Version: O Status: RL (released | freigegeben | validé) printed: 16.05.2022

## 5. Ordering information

### 5.1. Bürkert eShop – Easy ordering and quick delivery



**Bürkert eShop – Easy ordering and fast delivery**

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

### 5.2. Bürkert product filter




**Bürkert product filter – Get quickly to the right product**

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.


[Try out our product filter](#)

### 5.3. Ordering chart standard version

Circuit function	Orifice [mm]	Q <sub>Nn</sub> value air [l/min] <sup>1.)</sup>	Pressure range [bar] <sup>2.)</sup>	Switching times		Voltage/ Frequency [V/Hz]	Article no.	
				Opening [ms]	Closing [ms]		Valves REV. 1	Valves REV. 2
<b>5/2 way</b>								
<b>H, solenoid valve</b> 5/2 way Servo-controlled, pilot air and manual mode Pressure applied via port (1), therefore one of the two ports (2) or (4) is under pressure 	4	300	1...10 <sup>3.)</sup>	<10	<10	24 V DC <sup>4.)</sup>	20029914 (186271) <sup>5.)</sup>	20029922 (20013117) <sup>5.)</sup>
			2.5...10	<10	<10	24 V DC <sup>4.)</sup>	20029912 (179938) <sup>5.)</sup>	20029920 (365610) <sup>5.)</sup>

- 1.) Measured at +20 °C, 6 bar pressure at valve inlet and 1 bar pressure difference
- 2.) Measured as overpressure to the atmospheric pressure
- 3.) Version with auxiliary pilot air
- 4.) 10 % residual ripple allowed
- 5.) The valve article number can no longer be ordered. Please order superior set.

## 5.4. Ordering chart second connection for shut-off function

Circuit function	Orifice [mm]	Q <sub>Nn</sub> value air [l/min] <sup>1.)</sup>	Pressure range [bar] <sup>2.)</sup>	Switching times		Voltage/ Frequency [V/Hz]	Article no.	
				Opening [ms]	Closing [ms]		Valves REV. 1	Valves REV. 2
<b>5/2 way, without manual override</b>								
<b>H, solenoid valve</b> 5/2 way Servo-controlled There is always one of the two outlet ports (2) or (4) pressurized when coil is activated	4	300	1...10 <sup>3.)</sup>	<10	<10	24 V DC <sup>4.)</sup>	on request	on request
			2.5...10	<10	<10	24 V DC <sup>4.)</sup>	20029917 𠄎 (285544) <sup>5.)</sup>	20029925 𠄎 (20013137) <sup>5.)</sup>
								

1.) Measured at +20 °C, 6 bar pressure at valve inlet and 1 bar pressure difference

2.) Measured as overpressure to the atmospheric pressure

3.) Version with auxiliary pilot air

4.) 10 % residual ripple allowed

5.) The valve article number can no longer be ordered. Please order superior set.

## 5.5. Ordering chart for accessories

Accessories	Version	Features	Article no.
Rectangular cable plug for 6524 single valve	Grid 5.08 mm	With 3 m cable, 2-pins	133486 𠄎
		With 300 mm flying leads, 2-pins	644068 𠄎
		With 2 single contacts	644067 𠄎
Covering plate for 5/2 way valve position	Complete	For 1 unused valve position	650373 𠄎
Set profile seal pilot valve	For REV. 1	12 seals	20024334 𠄎
Set profile seal pilot valve	For REV. 2	12 seals	20016305 𠄎