



Pressure transmitter for general applications, 0...25 bar

- Available with hygienic flush-mounted diaphragm
- Housing and wetted parts in corrosion-resistant stainless steel
- Standard signal 4...20 mA for connection to automation systems
- Plug for quick installation and service
- Many pressure ranges available

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 8611 eCONTROL - Universal controller
	Type 8802 ELEMENT continuous control valve systems - overview
	Type 8619 multiCELL - Multi-channel and multi-function transmitter/controller

Type description

This pressure transmitter is designed to cover the majority of industrial applications in the field of pressure measurement technology. High accuracy, compact design, robust construction and flexibility make the transmitter suitable for various measurement tasks. All wetted parts are made of stainless steel and completely welded. Internal seal elements, which restrict the choice of measuring materials, are excluded.

Many other pressure ranges available, 0.125 % accuracy, other output signals, other electrical connections, other process connections, on request.



Table of contents

1. General technical data	3
2. Approvals	6
2.1. Pressure equipment directive	6
Device used on a pipe	6
Device used on a vessel	6
3. Materials	6
3.1. Chemical Resistance Chart – Burkert resistApp.....	6
4. Dimensions	7
4.1. Standard variant <0.4 bar with process connection G ½" B.....	7
4.2. Standard variant ≥0.4 bar with process connection G ½" B.....	7
4.3. Standard variant ≥0.4 bar with process connection NPT ½" B	8
4.4. Standard flush diaphragm variant with process connection G ½" B.....	8
4.5. Standard flush diaphragm variant with process connection G 1" B.....	9
4.6. Hygienic flush diaphragm variant with process connection G 1" B	9
5. Product accessories	10
6. Networking and combination with other Burkert products	10
7. Ordering information	11
7.1. Burkert eShop – Easy ordering and quick delivery.....	11
7.2. Burkert product filter.....	11
7.3. Ordering chart.....	11
Standard variant with process connection G ½" B	11
Standard variant with process connection NPT ½" B	11
Flush diaphragm variant (standard or hygienic) with process connection G ½" B or G 1" B.....	12
7.4. Ordering chart accessories.....	12
Weld-on socket	12
Seals	12

1. General technical data

Product properties

Material

Please make sure the device materials are compatible with the fluid you are using.

Detailed information can be found in chapter “[3.1. Chemical Resistance Chart – Burkert resistApp](#)” on page 6.

Non wetted parts

Housing

- Standard variant <0.4 bar: stainless steel 1.4301 (304)
- Standard variant ≥0.4 bar or with flush diaphragm variant: stainless steel 1.4571 (316Ti)

Female cable plug/male fixed plug

PBT/PET GF30

Wetted parts

Process connection

- Standard variant <0.4 bar: stainless steel 1.4571 (316Ti)
- Standard variant ≥0.4 bar:
 - stainless steel 1.4404 (316L) (for ≤10 bar (150 PSI))
 - stainless steel 1.4534 (13-8 PH) (for >10 bar (150 PSI))

Measuring element

- Standard flush diaphragm variant: stainless steel 1.4571 (316Ti), FKM seal
- Hygienic flush diaphragm variant: stainless steel 1.4404 (316L), EPDM seal
- Standard variant <0.4 bar: stainless steel 1.4571 (316Ti)
- Standard variant ≥0.4 bar:
 - stainless steel 1.4404 (316L) (for ≤10 bar (150 PSI))
 - stainless steel 1.4534 (13-8 PH) (for >10 bar (150 PSI))

Seal

- Standard flush diaphragm variant: stainless steel 1.4571 (316Ti), FKM seal
- Hygienic flush diaphragm variant: stainless steel 1.4404 (316L), EPDM seal
- Standard flush diaphragm variant: FKM
- Hygienic flush diaphragm variant: EPDM

Internal transmitting liquid

Synthetic Oil (for standard variants with pressure range <10 bar (150 PSI) and for all flush diaphragm units)

Compatibility

Any pipe with sensor connection

- for standard variant: G ½" A according to DIN16288
- for flush diaphragm variant:
 - G 1" B with O-ring (range up to 1.6 bar)
 - G ½" B with O-ring (range >1.6 bar)
 - G 1" B hygienic variant (all ranges)

Dimensions

Detailed information can be found in chapter “[4. Dimensions](#)” on page 7.

Measured quantity

Relative pressure

Measuring range

Pressure reference = relative pressure [atmospheric]

- 0...0.1; 0.16; 0.25; 0.4; 0.6; 1.0; 1.6; 2.5; 4.0; 6.0; 10.0; 16.0 or 25.0 bar
- 0...10; 15; 25; 60; 100; 150; 250; 400 PSI

Detailed information can be found in chapter “[7.3. Ordering chart](#)” on page 11 .

Product accessory

Welding socket for pressure transmitter

- Standard flush diaphragm variant: G ½" B or G 1" B
- Hygienic flush diaphragm variant: G 1" B (hygienic)

Detailed information can be found in chapter “[5. Product accessories](#)” on page 10.



Performance data

Compensated ambient temperature range (Tamb)	0...+80 °C (+32...+176 °F)
Temperature coefficient (Tc)	In compensated T° range
Average Tc of zero	<ul style="list-style-type: none"> Standard variant <0.4 bar: $\leq \pm 0.4\%$ of measuring span /10K Standard variant ≥ 0.4 bar: $\leq \pm 0.2\%$ of measuring span /10K Flush diaphragm variant (standard + hygienic): <ul style="list-style-type: none"> $\leq \pm 0.2\%$ of measuring span /10K (measuring range > 0.25 bar) $< \pm 0.4\%$ of measuring span /10K (measuring range ≤ 0.25 bar)
Average Tc of measuring span	<ul style="list-style-type: none"> Standard variant <0.4 bar: $\leq \pm 0.2\%$ of measuring span /10K Standard variant ≥ 0.4 bar: $\leq \pm 0.2\%$ of measuring span /10K Flush diaphragm variant (standard + hygienic): $\leq \pm 0.2\%$ of measuring span /10K
Adjustability: Zero / span	$\pm 5\%$
Measurement deviation	<ul style="list-style-type: none"> $\leq 0.5\%$ of measuring span (2-point calibration)^{1.)} $\leq 0.25\%$ of measuring span (Best Fit Straight Line, BFSL)^{1.)}
Hysteresis	$\leq 0.1\%$ of measuring span
Repeatability	$\leq 0.1\%$ of measuring span
Response time	<ul style="list-style-type: none"> Standard variant <0.4 bar: ≤ 1 ms Standard variant ≥ 0.4 bar: ≤ 3 ms Flush diaphragm variant (standard + hygienic): ≤ 2 ms
Stability	Over 1 year <ul style="list-style-type: none"> Standard variant <0.4 bar: $\leq \pm 0.2\%$ of measuring span (at reference conditions) Standard variant ≥ 0.4 bar: <ul style="list-style-type: none"> $\leq \pm 0.1\%$ of measuring span $\leq \pm 0.2\%$ of measuring span (with special measuring ranges and measuring ranges < 1 bar (15 psi)) Flush diaphragm variant (standard + hygienic): $\leq \pm 0.2\%$ of measuring span (at reference conditions)

Electrical data

Operating voltage [U]	<ul style="list-style-type: none"> Standard variant <0.4 bar: 10...30 V DC Standard variant ≥ 0.4 bar: 8...36 V DC Flush diaphragm variant (standard + hygienic): 10...30 V DC Filtered and regulated Connection to main supply: permanent (through external SELV (Safety Extra Low Voltage) and LPS (Limited Power Source) power supply)
Power source (not supplied)	Limited power source according to UL/EN 60950-1 standards or limited energy circuit according to UL/EN 61010-1 §9.4
DC reverse polarity protection	Yes
Oversupply protection	Yes
Short circuit protection	Yes
Load	<ul style="list-style-type: none"> Standard variant <0.4 bar: $\leq (U [V] - 10 [V]) / 0.02 [A]$ (in Ω) Standard variant ≥ 0.4 bar: $\leq (U [V] - 7.5 [V]) / 0.023 [A]$ (in Ω) Flush diaphragm variant (standard + hygienic): $\leq (U [V] - 10 [V]) / 0.02 [A]$ (in Ω)
Output	Standard 4...20 mA, 2 wires

Media data

Fluid temperature	<ul style="list-style-type: none"> Standard variant: -30...+100 °C (-22...+212 °F) Standard flush diaphragm variant: -30...+100 °C (-22...+212 °F) Hygienic flush diaphragm variant: -20...+150 °C (-4...+302 °F)
-------------------	--



Process/Pipe connection & communication

Process connection

- Standard variant
 - G ½" B (according to EN837)
 - NPT ½" B (according to ANSI/ASME B1.20.1)
- Flush diaphragm variant
 - G 1" B standard with O-ring (range up to 1.6 bar)
 - G ½" B standard with O-ring (range up to > 1.6 bar)
 - G 1" B hygienic variant (all ranges)

Electrical connection

4 pin cable plug according to EN 175301-803 form A

Approvals and certificates
Directives

CE directive

The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable)

Pressure equipment directive

Complying with article 4, paragraph 1 of 2014/68/EU directive

Detailed information on the pressure equipment directive can be found in chapter "[2.1. Pressure equipment directive](#)" on page 6.

Environment and installation
Ambient temperature

Operation

- Standard variant <0.4 bar: -20...+80 °C (-4...+176 °F)
- Standard variant ≥0.4 bar: -30...+100 °C (-4...+212 °F)
- Flush diaphragm variant (standard + hygienic): -20...+80 °C (-4...+176 °F)
- Standard variant <0.4 bar: -40...+100 °C (-40...+212 °F)
- Standard variant ≥0.4 bar: -40...+70 °C (-40...+158 °F)
- Flush diaphragm variant (standard + hygienic): -40...+100 °C (-4...+212 °F)

Storage

Degree of protection according to IEC/EN 60529

IP65 with device wired and with cable plug mounted and tightened

1.) Calibrated in vertical mounting position with pressure connection bottom.



2. Approvals

2.1. Pressure equipment directive

The device conforms to article 4, paragraph 1 of the pressure equipment directive 2014/68/EU under the following conditions:

Device used on a pipe

Note:

- The data in the table is independent of the chemical compatibility of the material and the fluid.
- PS = maximum admissible pressure, DN = nominal diameter of the pipe

Type of fluid	Conditions
Fluid group 1, article 4, paragraph 1.c.i	DN ≤ 25
Fluid group 2, article 4, paragraph 1.c.i	DN ≤ 32 or PS*DN ≤ 1000
Fluid group 1, article 4, paragraph 1.c.ii	DN ≤ 25 or PS*DN ≤ 2000
Fluid group 2, article 4, paragraph 1.c.ii	DN ≤ 200 or PS ≤ 10 or PS*DN ≤ 5000

Device used on a vessel

Note:

- The data in the table is independent of the chemical compatibility of the material and the fluid.
- PS = maximum admissible pressure, V = vessel volume

Type of fluid	Conditions
Fluid group 1, article 4, paragraph 1.a.i	V > 1 L and PS*V ≤ 25 bar.L or PS ≤ 200 bar
Fluid group 2, article 4, paragraph 1.a.i	V > 1 L and PS*V ≤ 50 bar.L or PS ≤ 1000 bar
Fluid group 1, article 4, paragraph 1.a.ii	V > 1 L and PS*V ≤ 200 bar.L or PS ≤ 500 bar
Fluid group 2, article 4, paragraph 1.a.ii	PS > 10 bar and PS*V ≤ 10000 bar.L or PS ≤ 1000 bar

3. Materials

3.1. Chemical Resistance Chart – Burkert resistApp



Burkert resistApp – Chemical Resistance Chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.


[Start Chemical Resistance Check](#)

4. Dimensions

4.1. Standard variant <0.4 bar with process connection G 1/2" B

Note:


Dimensions in mm, unless otherwise stated

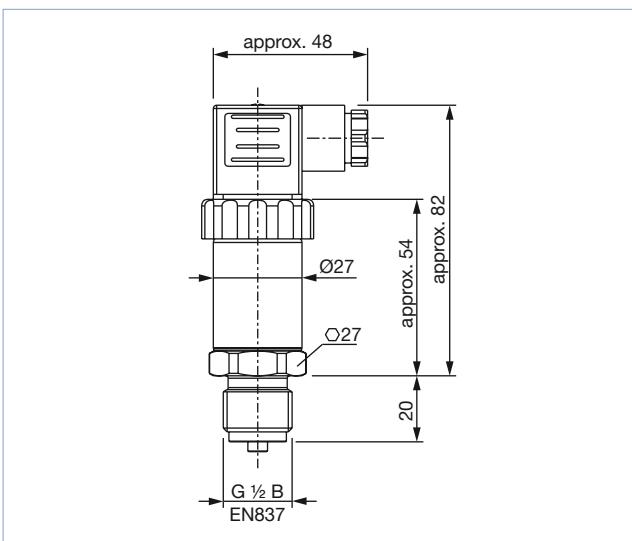

4.2. Standard variant ≥0.4 bar with process connection G 1/2" B

Note:


Dimensions in mm, unless otherwise stated

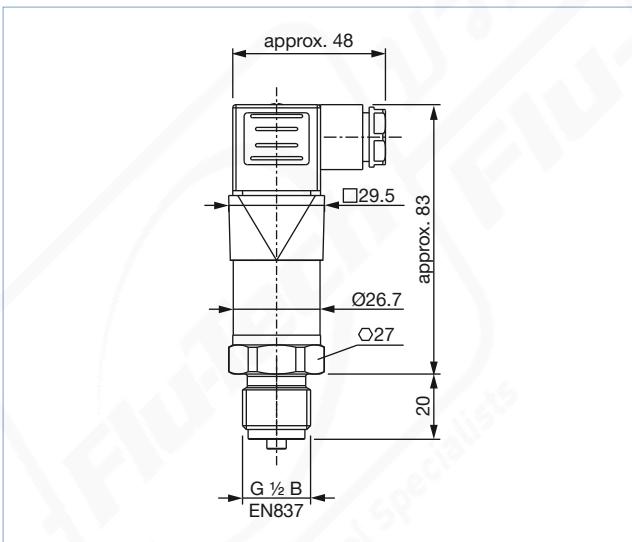

4.3. Standard variant ≥ 0.4 bar with process connection NPT $\frac{1}{2}$ " B

Note:


Dimensions in mm, unless otherwise stated

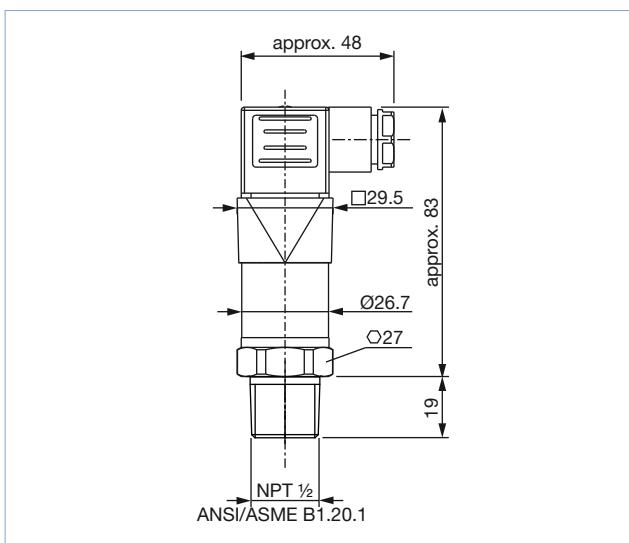

4.4. Standard flush diaphragm variant with process connection G $\frac{1}{2}$ " B

Note:


Dimensions in mm, unless otherwise stated

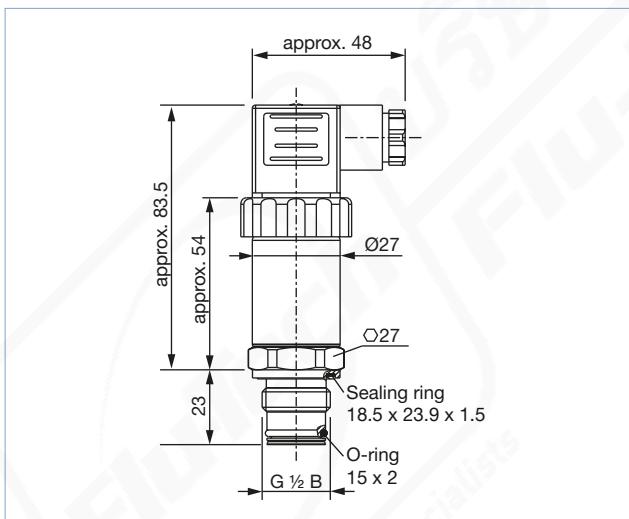

4.5. Standard flush diaphragm variant with process connection G 1" B

Note:


Dimensions in mm, unless otherwise stated

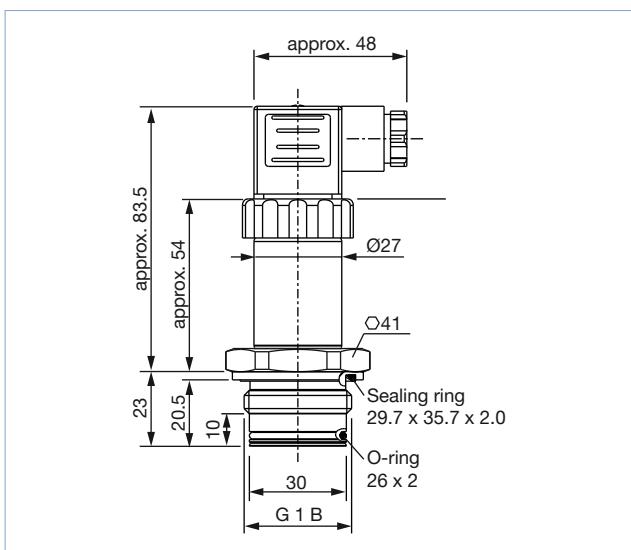

4.6. Hygienic flush diaphragm variant with process connection G 1" B

Note:

Dimensions in mm, unless otherwise stated

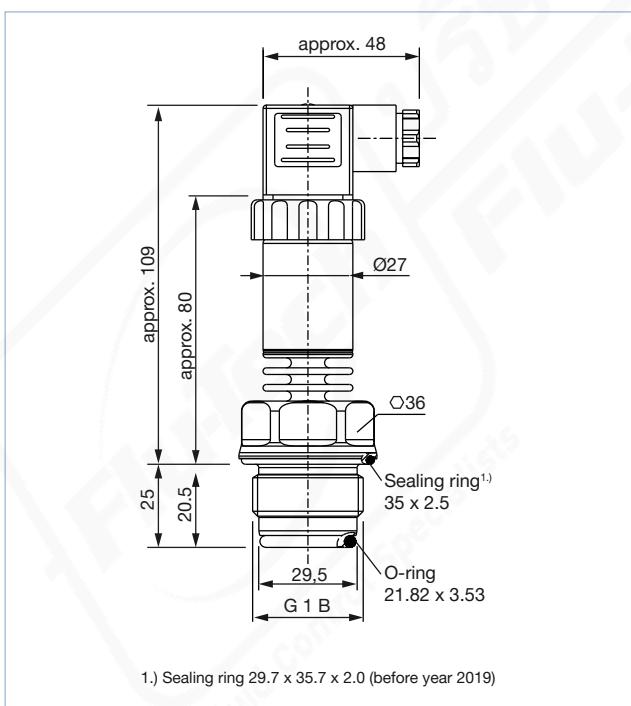

1.) Sealing ring 29.7 x 35.7 x 2.0 (before year 2019)

5. Product accessories

Pressure transmitter with flush diaphragm can be installed via a process adapter with welding connection (e.g. for welding to tanks). Measuring instrument and process adapter can be easily fastened or loosened with a wrench.

Accessory	Description
	Welding socket for pressure transmitter with flush diaphragm: Standard variant with process connection G 1/2" B Material: stainless steel 1.4435 (316L); UNS S31603 Surface roughness of wetted parts Ra <0.4 µm Nominal pressure PN 40
	Welding socket for pressure transmitter with flush diaphragm: Standard variant with process connection G 1" B Material: stainless steel 1.4435 (316L); UNS S31603 Surface roughness of wetted parts Ra <0.4 µm Nominal pressure PN 40
	Welding socket for pressure transmitter with flush diaphragm: Hygienic variant with process connection G 1" B Material: stainless steel 1.4435 (316L); UNS S31603 Surface roughness of wetted parts Ra <0.4 µm Nominal pressure PN 40

6. Networking and combination with other Burkert products

Example:



7. Ordering information

7.1. Burkert eShop – Easy ordering and quick delivery




Burkert eShop – Easy ordering and fast delivery

You want to find your desired Burkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

7.2. Burkert product filter

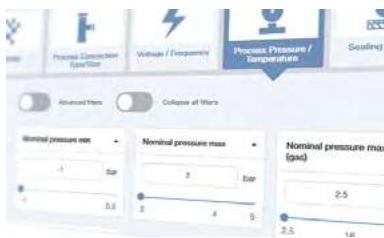

Burkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Burkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

7.3. Ordering chart

Standard variant with process connection G 1/2" B

Pressure range [bar]	Pressure max [bar]	Power supply [V DC]	Output signal [mA]	Article no.
0...0.10	1	10...30	4...20	569494 ☰
0...0.16	1.5	10...30	4...20	569495 ☰
0...0.25	2	10...30	4...20	570141 ☰
0...0.40	1.2	8...36	4...20	569090 ☰
0...0.60	1.8	8...36	4...20	569091 ☰
0...1.00	3	8...36	4...20	569092 ☰
0...1.60	4.8	8...36	4...20	569093 ☰
0...2.50	7.5	8...36	4...20	569094 ☰
0...4.00	12	8...36	4...20	569095 ☰
0...6.00	18	8...36	4...20	569096 ☰
0...10.0	20	8...36	4...20	569097 ☰
0...16.0	32	8...36	4...20	569098 ☰
0...25.0	50	8...36	4...20	569099 ☰

Standard variant with process connection NPT 1/2" B

Pressure range [PSI]	Pressure max [PSI]	Power supply [V DC]	Output signal [mA]	Article no.
0...10	30	8...36	4...20	569100 ☰
0...15	45	8...36	4...20	569101 ☰
0...25	45	8...36	4...20	569102 ☰
0...60	180	8...36	4...20	569103 ☰
0...100	300	8...36	4...20	569104 ☰
0...150	300	8...36	4...20	569176 ☰
0...250	500	8...36	4...20	569177 ☰
0...400	800	8...36	4...20	569178 ☰

[Visit product website ▶](#)

11 | 13



@flutech.co.th



0 2384 6060



www.flutech.co.th



sales@flutech.co.th

Flush diaphragm variant (standard or hygienic) with process connection G ½" B or G 1" B

Pressure range [bar]	Pressure max [bar]	Power supply [V DC]	Output signal [mA]	Standard G ½" B	Standard G 1" B	Hygienic G 1" B
0...0.10	1	10...30	4...20	–	569485 Ⓜ	569478 Ⓜ
0...0.16	1.5	10...30	4...20	–	569486 Ⓜ	–
0...0.25	2	10...30	4...20	–	–	–
0...0.40	2	10...30	4...20	–	569487 Ⓜ	569479 Ⓜ
0...0.60	4	10...30	4...20	–	–	569480 Ⓜ
0...1.00	5	10...30	4...20	–	569488 Ⓜ	569481 Ⓜ
0...1.60	10	10...30	4...20	–	–	569482 Ⓜ
0...2.50	10	10...30	4...20	569489 Ⓜ	–	569483 Ⓜ
0...4.00	17	10...30	4...20	–	–	–
0...6.00	35	10...30	4...20	569490 Ⓜ	–	–
0...10.0	35	10...30	4...20	569491 Ⓜ	–	569484 Ⓜ
0...16.0	80	10...30	4...20	569492 Ⓜ	–	–
0...25.0	50	10...30	4...20	569493 Ⓜ	–	–

Further versions on request

	Process connection <ul style="list-style-type: none"> EN837 G ¼" B DIN 3852-E G ½" A or G ¼" A ASME NPT ½", NPT ¼", etc.^{1.)} 		Pressure <ul style="list-style-type: none"> Relative pressure: up to 1000 bar or 10000 PSI Absolute pressure: up to 40 bar or 500 PSI
	Electrical connection M12 connector, EN 175301-803 form C, cable connection, etc. ^{1.)}		Additional <ul style="list-style-type: none"> Output signal 0...10 V DC, 0...5 V DC, etc.^{1.)} Measurement deviation at 0.125 % BFSL (Best Fit Straight Line)

1.) For other process, electrical connections or other output signal, please contact your local Burkert office.

7.4. Ordering chart accessories

Weld-on socket

Note:

The following accessories are intended for flush diaphragm variant (standard or hygienic) with process connection G ½" B or G 1" B.

Description	Article no.
Weld-on socket for standard flush diaphragm variant with process connection G ½"	443295 Ⓜ
Weld-on socket for standard flush diaphragm variant with process connection G 1"	444137 Ⓜ
Weld-on socket for hygienic flush diaphragm variant with process connection G 1"	443296 Ⓜ

Seals

Note:

The following accessories are intended for flush diaphragm variant (hygienic) with process connection G 1" B.

Description	Article no.
O-ring, 21.82 x 3.53 in EPDM	562769
Sealing ring 29.7 x 35.7 x 2.0 in EPDM ^{1,2.)}	566539
Sealing ring 35 x 2.5 in EPDM ^{2,3.)}	573044

1.) For devices delivered before year 2019

2.) For devices purchased in the year 2019, please contact your Burkert office or the E&C department in France in Triembach-au-Val 67220, to determine the appropriate seal dimension to be ordered.

3.) For devices delivered after year 2019

