



## Digital electropneumatic positioner SideControl

- Compact and robust design
- Easy to start up using Tune function
- Integrated diagnostic functions for valve monitoring
- Dynamic actuating system with no air consumption in controlled state
- EtherNet/IP, PROFINET, Modbus TCP, PROFIBUS DP-V1 or Burkert system bus (büS)

Product variants described in the data sheet may differ from the product presentation and description.

### Can be combined with

	<b>Type 8805</b>	Ball valve / Butterfly valve with pneumatic rotary actuator
	<b>Type 2051</b>	Pneumatic rotary actuator
	<b>Type 8798</b>	Remote sensor for pneumatically actuated process valves
	<b>Type 2301</b>	Pneumatically operated 2-way Globe Control Valve
	<b>Type 2300</b>	Pneumatically operated 2-way angle seat control valve ELEMENT
	<b>Type 2103</b>	2/2-way diaphragm valve with pneumatic stainless steel actuator (Type ELEMENT) for decentralised automation

### Type description

The robust and compact positioner is designed with standardisation acc. to IEC 60534-6-1 or VDI/VDE 3845 (IEC 60534-6-2) for assembly onto linear and rotary actuators. In addition, the variant with remote position sensor can be combined with Burkert process control valves for closed-loop control. The digital electropneumatic positioner, SideControl, can be operated with all standard current and voltage standard signals and can also optionally be equipped with the fieldbus interface. The positioner is equipped with additional diagnostic functions to monitor the valve. Valve diagnostic messages via status signals are issued in accordance with NE107 (NAMUR) and recorded as historical entries. The diagnostics can be used to monitor the operating conditions of the control valve which makes maintenance decisions predictable and optimises the availability of the plants as required. Operation occurs via the external operating and display module consisting of a graphic display with backlight. For the user, this results in very simple and clear operation, which is identical to the Burkert ELEMENT 8692/8693 positioners and process controllers. The pneumatic actuating system can be used equally for single-acting and double-acting actuators. It features a defined safety response in the event of failure of the electrical or pneumatic power supply and has an enormous air capacity range with pressure supply up to 7 bar.

## Table of contents

<b>1. General technical data</b>	<b>4</b>
1.1. Positioner SideControl Type 8792.....	4
1.2. Linear remote position sensor (ELEMENT Type 8798).....	6
1.3. Rotative remote position sensor (NAMUR).....	6
1.4. Position feedback with proximity switches (accessories for retrofitting) .....	7
<b>2. Approvals and conformities</b>	<b>8</b>
2.1. General notes.....	8
2.2. Conformity .....	8
2.3. Standards.....	8
2.4. Explosion protection .....	8
Positioner SideControl Type 8792.....	8
2.5. North America (USA/Canada) .....	8
Positioner SideControl Type 8792.....	8
Linear position sensor, remote (ELEMENT Type 8798).....	8
Rotative position sensor, remote (NAMUR Type 8798).....	8
2.6. Others .....	9
China Compulsory Certification (CCC) .....	9
<b>3. Dimensions</b>	<b>10</b>
3.1. NAMUR version .....	10
3.2. Remote version.....	11
3.3. Mounting specification of NAMUR/Remote Version.....	12
NAMUR version .....	12
Remote version.....	12
3.4. ATEX/IECEx version .....	13
3.5. Remote position sensor version .....	13
3.6. Mounting on control valve according to NAMUR .....	14
<b>4. Device/Process connections</b>	<b>15</b>
4.1. Electrical connections.....	15
Multipole connection.....	15
PROFIBUS DP connection.....	17
EtherNet/IP, PROFINET, Modbus TCP connection.....	18
Bürkert system bus (büss) connection.....	19
<b>5. Performance specifications</b>	<b>21</b>
5.1. Signal flow diagram.....	21
Position control loop .....	21
Additional software options of positioner SideControl Type 8792 (extract).....	21
5.2. Interface diagram .....	22
Version without fieldbus communication .....	22
Version with fieldbus communication .....	22
<b>6. Product installation</b>	<b>23</b>
6.1. Mounting options.....	23
NAMUR version .....	23
Remote version .....	24
Position feedback with proximity switches.....	25
6.2. Combination possibilities with pneumatic process valves .....	26

**7. Ordering information****27**

7.1.	Bürkert eShop.....	27
7.2.	Bürkert product filter.....	27
7.3.	Ordering chart.....	28
	Positioner SideControl Type 8792 NAMUR version.....	28
	Positioner SideControl Type 8792 remote version.....	29
	Remote position sensor for remote version of SideControl Type 8792 .....	29
7.4.	Ordering chart accessories.....	30
	Standard accessories .....	30
	Accessories SideControl NAMUR.....	30
	Accessories SideControl Remote .....	30



## 1. General technical data

### 1.1. Positioner SideControl Type 8792

#### Product properties

Dimensions	Further information can be found in chapter “ <a href="#">3. Dimensions</a> ” on page 10.
<b>Material</b>	
Housing	Aluminium, plastic-coated
Seal	EPDM, NBR, FKM
<b>Operation</b>	
Display	Graphic display with backlight and intuitive menu navigation
Operating keys	Membrane keypad with 4 keys
Service interface	Connected to PC via USB connection
Configuration tool	Bürkert Communicator PACTware (only for device versions with PROFIBUS)
<b>Commissioning</b>	
Initialisation positioner	Automatic by X.TUNE function (automatic adjustment of the positioner)
<b>Status display</b>	
Optical position indicator (mechanical)	Integrated (for NAMUR Version)
<b>Communication</b>	
Fieldbus	EtherNet/IP, PROFINET, Modbus TCP, PROFIBUS DP-V1
Digital	Bürkert system bus (büS) (based on CANopen)
<b>Performance data</b>	
<b>Position sensor</b>	
Integrated position sensor (NAMUR)	Conductive plastic rotary potentiometer
External remote position sensor	Linear or rotative
<b>Measuring range for rotary actuator</b>	
PROFIBUS	Rotation angle: 30°...150°
EtherNet/IP, PROFINET, Modbus TCP and büS	Rotation angle: 30°...180°
Stroke range for linear actuator	3...130 mm, depending on the lever of the attachment kit
<b>Electrical data</b>	
Operating voltage	24 V DC ± 10 %
Residual ripple	Max. 10 %
Power consumption	<5 W
Protection class	III according to DIN EN 61140
<b>Input /Output</b>	
Digital input	1 digital input, galvanically isolated, 0...5 V = log “0”, 10...30 V = log “1”
Digital output	2 digital output (optional), galvanically isolated
Current limitation pro digital output	100 mA, output will be synchronised when overloaded
Analogue output	1 output (optional) 0/4...20 mA, 0...5/10 V
<b>Input data setpoint and actual value</b>	
<b>Setpoint signal</b>	
Setpoint setting	0/4...20 mA 0...5/10 V
Input resistance	0/4...20 mA: 70 Ω 0...5/10 V: 20 kΩ
<b>Electrical connection</b>	
Multipole version	Screw terminals: M8, M12 according to device version (see connection description)
Cable gland version	2x M20 × 1.5 (cable Ø 6...12 mm) on screw terminals (0.14...1.5 mm²)
Remote version	1x M12 × 1.5 (cable Ø 3...6.5 mm)

<b>Pneumatic data</b>	
<b>Control medium</b>	<b>Neutral gases, air, quality class according to ISO 8573 - 1</b>
Dust content	Class 7 (<40 µm particle size)
Particle density	Class 5 (<10 mg/m³)
Pressure dew point	Class 3 (<-20 °C)
Oil content	Class X (<25 mg/ m³)
<b>Air supply filter</b>	<b>Exchangeable</b>
Mesh size	~0.1 mm
Supply pressure	1.4...7 bar <sup>1,2)</sup>
Pilot air port	Threaded port G 1/4
<b>Positioning system</b>	
<b>Universal air capacity</b>	
Single and double acting	50 l <sub>N</sub> /min (at 1.4 bar <sup>2,3)</sup> for aeration and ventilation 150 l <sub>N</sub> /min (at 6 bar <sup>2,3)</sup> for aeration and ventilation $Q_{Nn} = 100 \text{ l}_N/\text{min}$
<b>Low air capacity</b>	
Single acting	$Q_{Nn} = 7 \text{ l}_N/\text{min}$ ( $Q_{Nn}$ according to definition at pressure drop from 7 to 6 bar abs)
<b>Approvals and conformities</b>	
<b>Explosion protection</b>	
Ignition protection class	II 3D Ex tc IIIC T135 °C Dc II 3G Ex ec IIC T4 Gc
ATEX	BVS 16 ATEX E 118 X II 3G Ex ec ic IIC T4 Gc II 3D Ex tc IIIC T135 °C Dc
IECEx	IECEx BVS 16.0091 X Ex ec ic IIC T4 Gc Ex tc IIIC T135 °C Dc
Further information can be found in chapter " <a href="#">2.4. Explosion protection</a> " on page 8.	
<b>North America (USA/Canada)</b>	
CSA for Canada and the USA	UL 429 (Electrically operated valves) CSA C22.2 No. 139 (Electrically operated valves) Further information can be found in chapter " <a href="#">2.5. North America (USA/Canada)</a> " on page 8.
<b>Others</b>	
China Compulsory Certification (CCC)	The products with Ex approval are suitable for import and use for hazardous applications in China. Further information can be found in chapter " <a href="#">2.6. Others</a> " on page 9.
Further information can be found in chapter " <a href="#">2. Approvals and conformities</a> " on page 8.	
<b>Environment and installation</b>	
<b>Operating conditions</b>	
<b>Ambient temperature</b>	
With ATEX-/IECEx approval	0...+60 °C
Without Ex approval	-10...+60 °C
Degree of protection	IP65/IP67 according to EN 60529, 4X according to NEMA 250 Standard
Operating altitude	Up to 2000 m above sea level
<b>Installation and mechanical data</b>	
Mounting variant	NAMUR according to IEC 60534 - 6 - 1 resp. VDI/VDE 3845 (IEC 60534 - 6 - 2), remote
Installation position	As required, display above or laterally
Valve actuator (type, size)	Rotary and linear actuators according to NAMUR, ELEMENT Type 2301, 2300 (actuator size Ø 70/90/130/225 mm) and CLASSIC (actuator size Ø175/225 mm) in combination with remote version
Adapter kit	Further information can be found in chapter " <a href="#">7.4. Ordering chart accessories</a> " on page 30

1.) Supply pressure has to be 0.5...1 bar above the minimum required pilot pressure for the valve actuator.

2.) Pressure data: overpressure to atmospheric pressure

## 1.2. Linear remote position sensor (ELEMENT Type 8798)

### Note:

When mounting the remote positioner away from the actuator, the length of the pneumatic control lines influences the dynamics and accuracy of the position control loop. The length of the control air lines should therefore be as short as possible.

### Product properties

Actual position signal	Digital (RS485)
Detection range of the sensor	3...45 mm (stroke range of valve spindle)

### Electrical data

Operating voltage	24 V DC ± 10 %
Protection class	III according to DIN EN 61140
Power consumption	<0.3 W

### Electrical connection

Cable gland (cable length)	1x M16 × 1.5 (cable Ø 5...10 mm) on screw terminals (0.14...1.5 mm <sup>2</sup> )
Connection cable	10 m

### Approvals and conformities

Protection class	IP65 and IP67 according to EN 60529, 4X according to NEMA 250 standard
------------------	--

### Explosion protection

Ignition protection class	II 3G Ex ec IIC T4 Gc II 3D Ex tc IIIC T135 °C Dc
---------------------------	--

Further information can be found in chapter "[2. Approvals and conformities](#)" on page 8.

### North America (USA/Canada)

UL Recognized for the USA and Canada	cULus certificate: 238179 Further information can be found in chapter " <a href="#">2.5. North America (USA/Canada)</a> " on page 8.
--------------------------------------	---

### Others

China Compulsory Certification (CCC)	The products with Ex approval are suitable for import and use for hazardous applications in China. Further information can be found in chapter " <a href="#">2.6. Others</a> " on page 9.
--------------------------------------	---

Further information can be found in chapter "[2. Approvals and conformities](#)" on page 8.

### Environment and installation

Ambient temperature	-25...+80 °C
---------------------	--------------

## 1.3. Rotative remote position sensor (NAMUR)

### Note:

When mounting the remote positioner away from the actuator, the length of the pneumatic control lines influences the dynamics and accuracy of the position control loop. The length of the control air lines should therefore be as short as possible.

### Product properties

Stroke range when mounted to linear actuator	3...130 mm, depending on the lever of the attachment kit
Actual position signal	Digital (RS485)
Measuring range	Rotation angle 30°...180°

### Electrical data

Operating voltage	10...30 V DC
Protection class	III according to DIN EN 61140
Power consumption	<0.8 W
Electrical connection	2 m round cable (shielded)
Approvals and conformities	

Protection class	IP65 according to EN 60529
------------------	----------------------------

### North America (USA/Canada)

UL Recognized for the USA and Canada	cULus certificate: E226909 Further information can be found in chapter " <a href="#">2.5. North America (USA/Canada)</a> " on page 8.
--------------------------------------	--

Further information can be found in chapter "[2. Approvals and conformities](#)" on page 8.

### Environment and installation

Ambient temperature	-25...+80 °C
---------------------	--------------

#### 1.4. Position feedback with proximity switches (accessories for retrofitting)

**Note:**

The feedback unit possesses 2 proximity switches that can be adjusted independently of each other via switch flags.

**Product properties**

Output function 3-wire, normally open contact, PNP

**Electrical data**

Electrical connection M12, 4-pin

Operating voltage 10...30 V DC

Protection class III according to DIN EN 61140

DC-rated current  $\leq 100$  mA

Residual ripple  $\leq 10\%$   $U_{ss}$

**Approvals and conformities**

Degree of protection IP65 and IP67

Further information can be found in chapter “[2. Approvals and conformities](#)” on page 8.

## 2. Approvals and conformities

### 2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available versions can be supplied with the below mentioned approvals or conformities.

### 2.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

### 2.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

### 2.4. Explosion protection

Positioner SideControl Type 8792

Approval	Description
	<b>Optional: Explosion protection</b> <b>ATEX:</b> BVS 16 ATEX E 118 X II 3G Ex ec ic IIC T4 Gc II 3D Ex tc IIIC T135 °C Dc <b>IECEx:</b> IECEx BVS 16.0091 X Ex ec ic IIC T4 Gc Ex tc IIIC T135 °C Dc

### 2.5. North America (USA/Canada)

Positioner SideControl Type 8792

Approval	Description
	<b>Optional: CSA for Canada and the USA</b> The products are CSA approved for Canada and the USA according to: <ul style="list-style-type: none"> <li>UL 429 (Electrically operated valves)</li> <li>CSA C22.2 No. 139 (Electrically operated valves)</li> </ul>

Linear position sensor, remote (ELEMENT Type 8798)

Approval	Description
	<b>Optional: UL Listed for the USA and Canada</b> The products are UL Listed for the USA and Canada according to: <ul style="list-style-type: none"> <li>UL 61010-1 (ELECTRICAL EQUIPMENT FOR MEASUREMENT, CONTROL, AND LABORATORY USE – Part 1: General Requirements)</li> <li>CAN/CSA-C22.2 No. 61010-1</li> </ul>

Rotative position sensor, remote (NAMUR Type 8798)

Approval	Description
	<b>Optional: UL Listed for the USA and Canada</b> The products are UL Listed for the USA and Canada according to: Certificate no.: E226909

## 2.6. Others

### China Compulsory Certification (CCC)

Positioner SideControl Type 8792 and Linear Position Transducer Remote (ELEMENT Type 8798)

Conformity	Description
	<b>Optional: China Compulsory Certification (CCC)</b> The products with Ex approval are suitable for import and use for hazardous applications in China.




### 3. Dimensions

#### 3.1. NAMUR version

**Note:**

Dimensions in mm

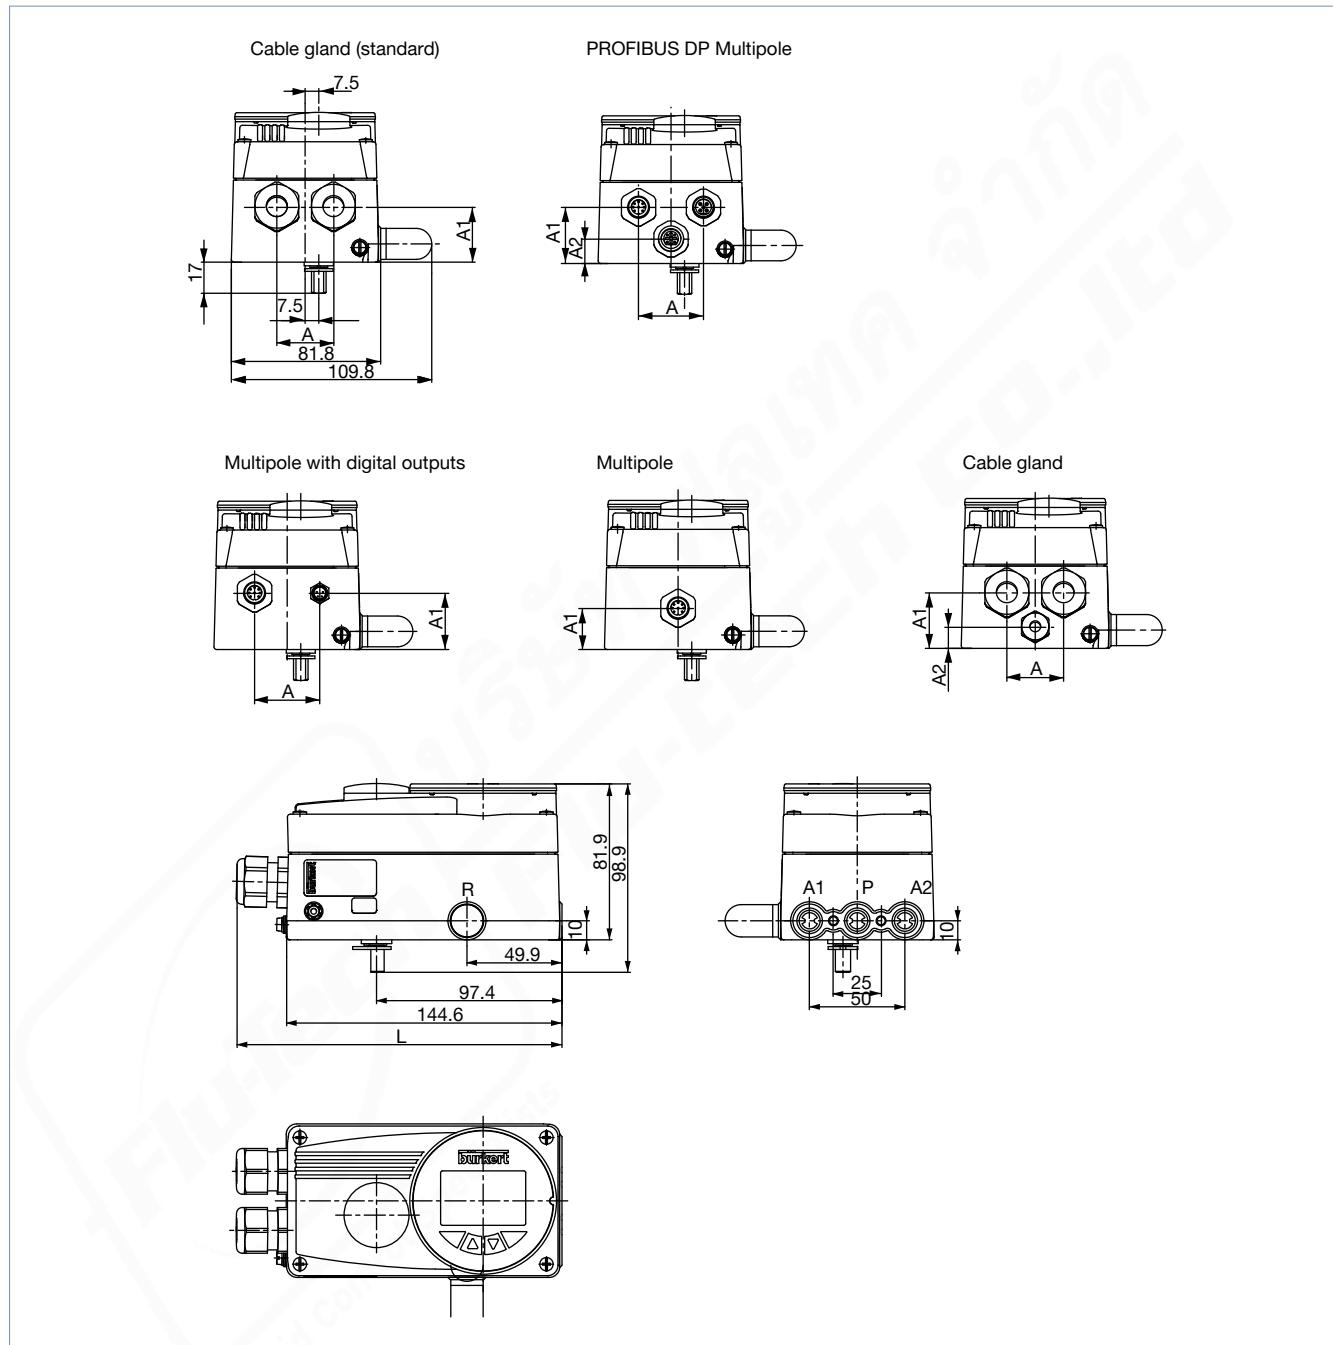


Description	L	A	A1	A2
Standard	171.1	31	30	-
PROFIBUS DP	157.8	36	31	13.5
Multipole digital outputs	157.6	36	31	-
Multipole	157.4	-	22.5	-
Remote	171.1	31	30	11.5

### 3.2. Remote version

**Note:**

Dimensions in mm

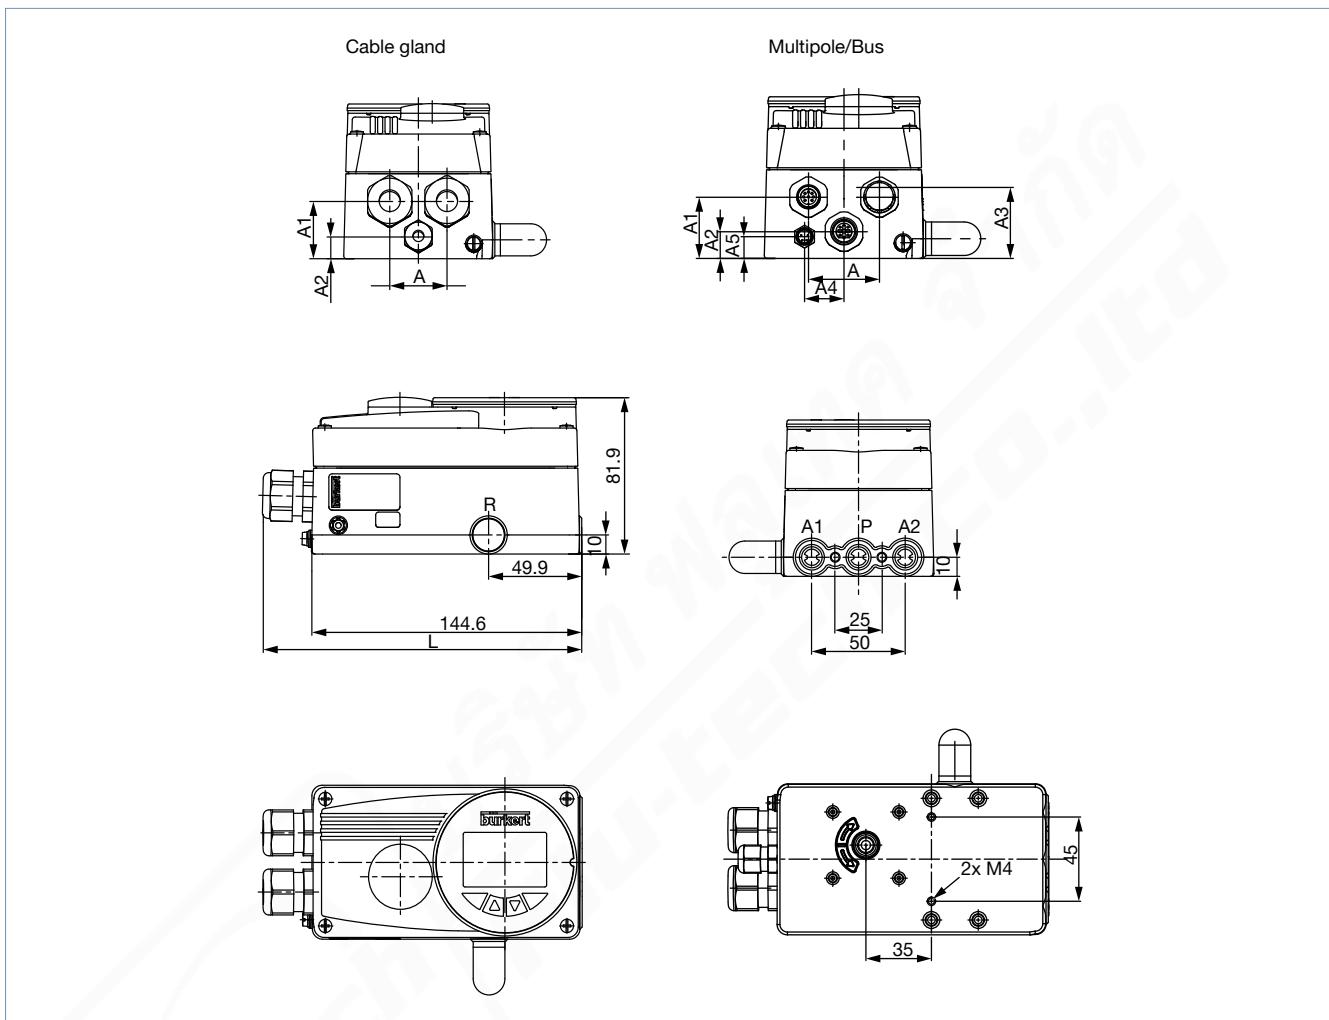


Description	L	A	A1	A2	A3	A4	A5
Remote cable gland	171.1	31	30	11.5	—	—	—
Remote multipole/bus	157.8	36	31	13.5	36	20	11

### 3.3. Mounting specification of NAMUR/Remote Version

**Note:**


- Dimensions in mm
- The rotary motion of the sensor shaft must be within a range of max. 180°.<sup>1)</sup>
- The sensor shaft must be in this position at approx. 50 % valve opening.

**NAMUR version**

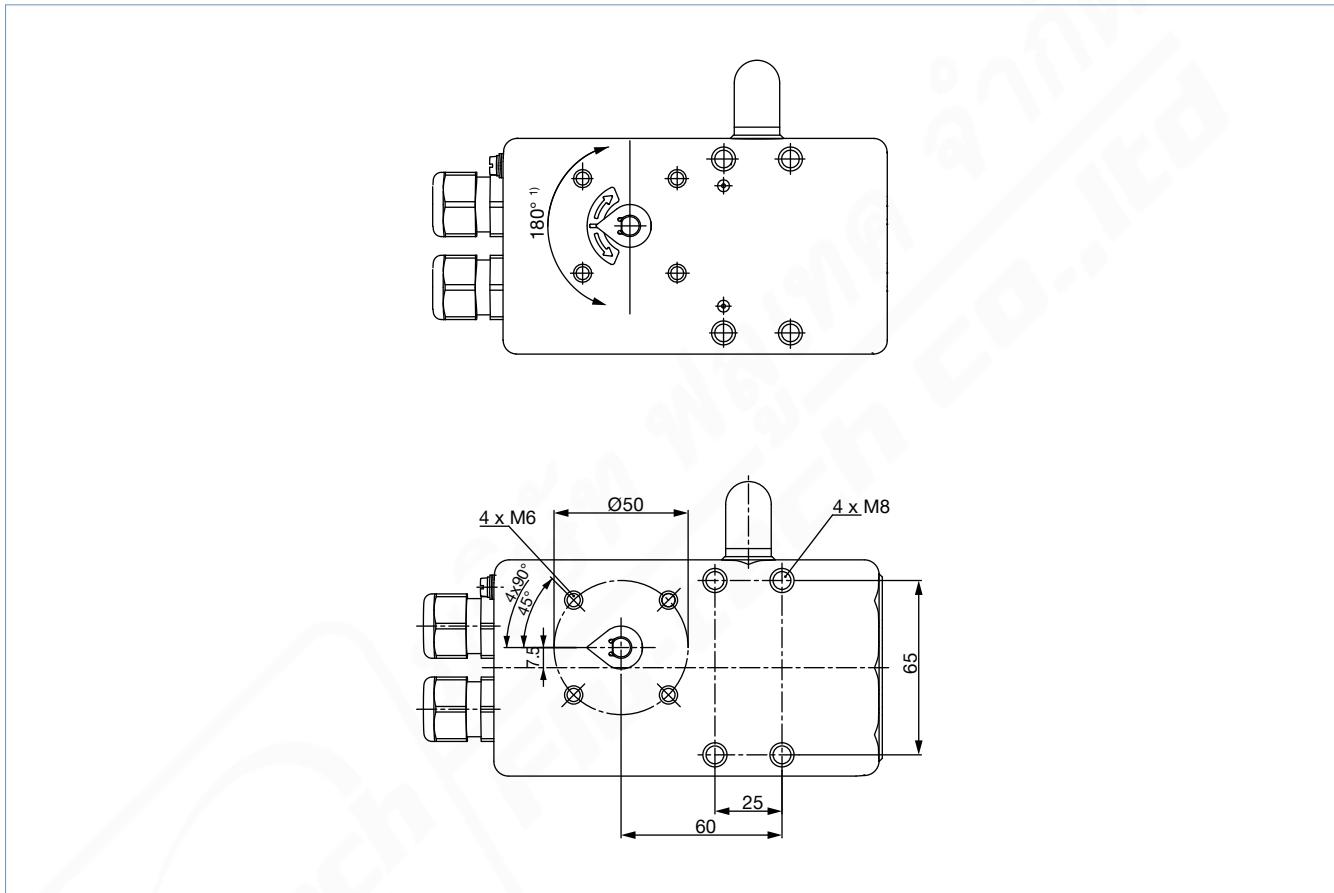

1.) Max. 180° are possible for the EtherNet/IP, PROFINET, Modbus TCP and büS variants, max. 150° for the other variants.


**Remote version**

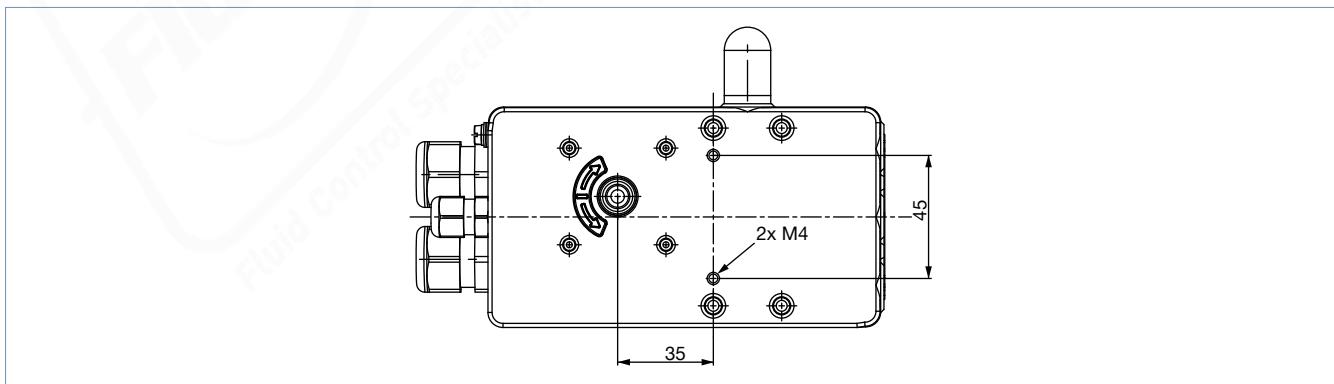

### 3.4. ATEX/IECEx version

**Note:**

Dimensions in mm

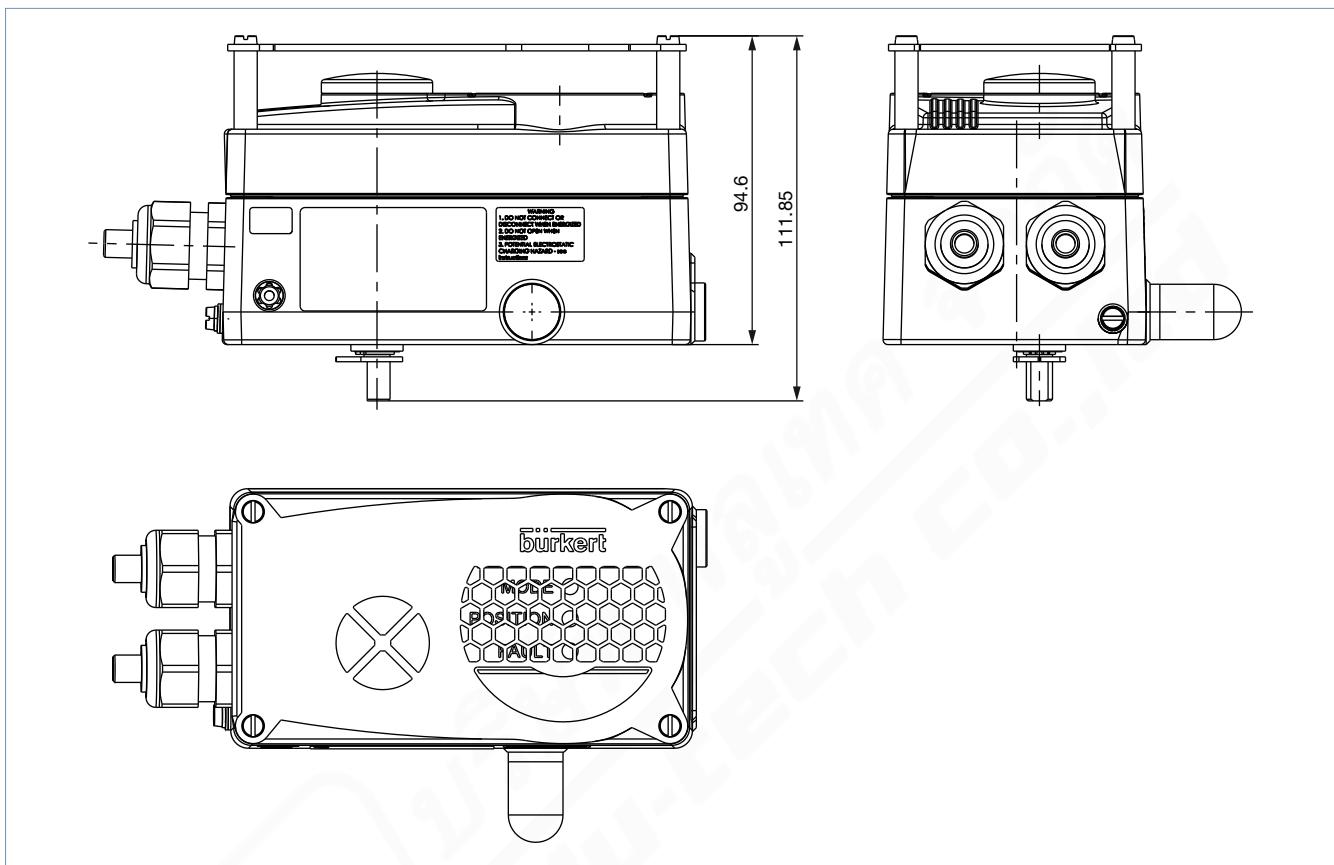


### 3.5. Remote position sensor version

**Note:**

Dimensions in mm

Linear position sensor **Type 8798** ► for valve position detection of Burkert ELEMENT valves and hygienic process valves for the remote SideControl positioner.

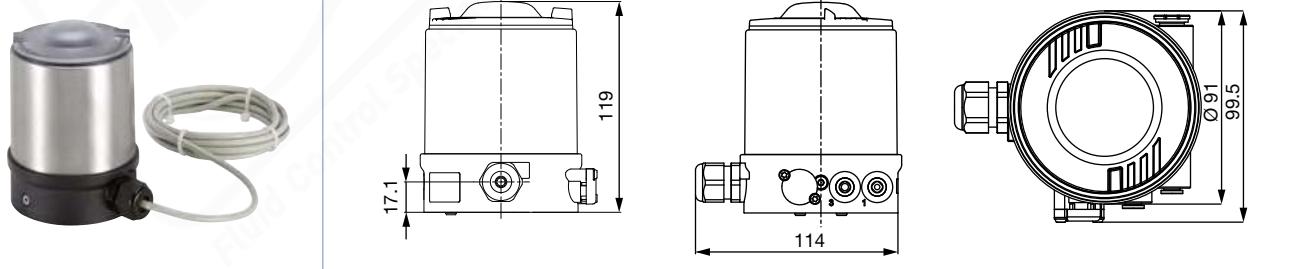


### 3.6. Mounting on control valve according to NAMUR

**Note:**

Dimensions in mm


Rotative position sensor to detect rotary motion of rotary actuators according to NAMUR/IEC 60534-6-1 and VDI/VDE 3845 (IEC 60534-6-2) for the remote SideControl positioner.

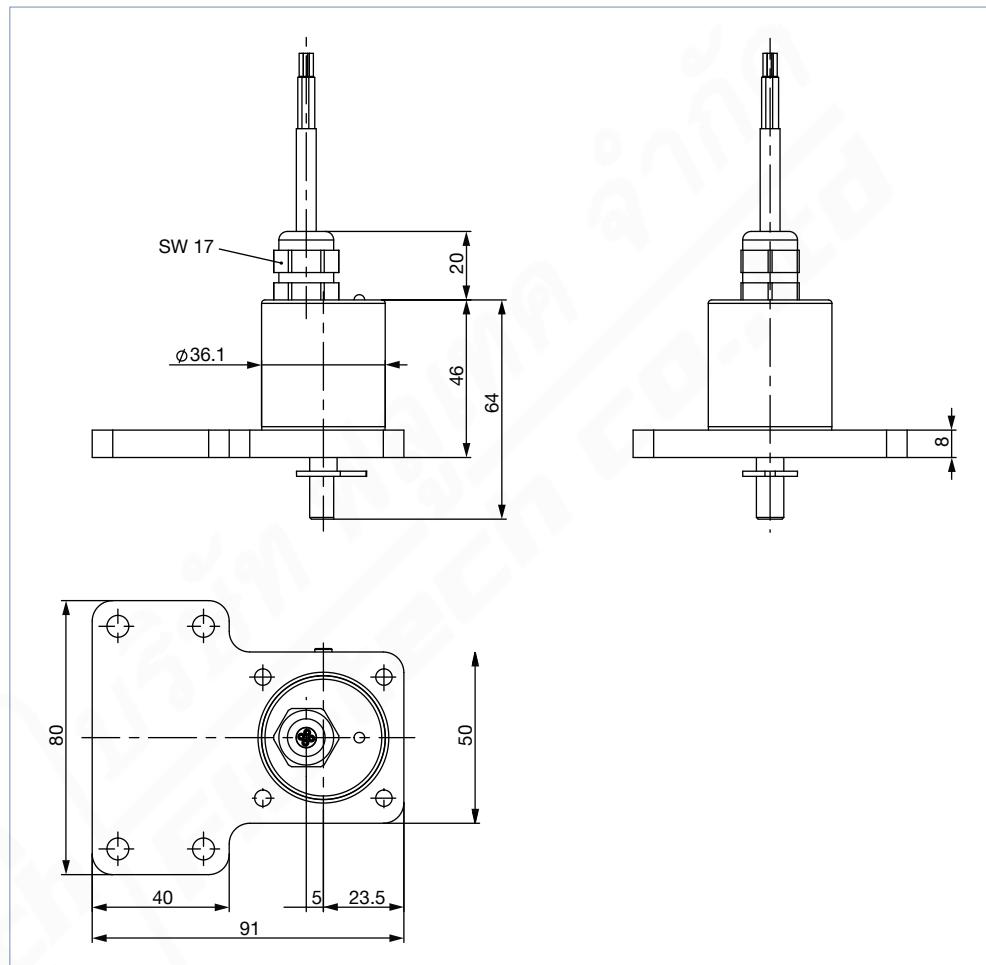

## 4. Device/Process connections

### 4.1. Electrical connections

#### Multipole connection

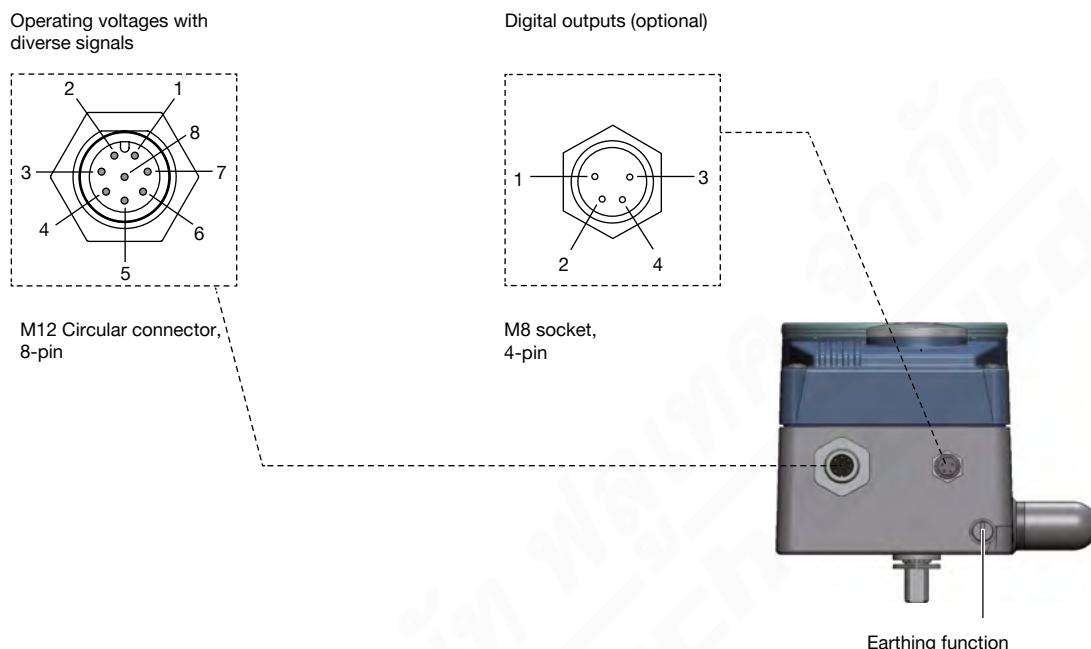

#### M12 circular plug, 8-pin (setpoint)

Pin	Pin assignment	Outer circuitry/Signal level		
1	Setpoint + (0/4...20 mA or 0...5/10 V)	1	○ —	+ (0/4...20 mA or 0...5/10 V) Completely galvanically isolated
2	Setpoint GND	2	○ —	GND
3	GND	3	○ —	24 V DC ± 10 %
4	+24 V	4	○ —	Max. residual ripple 10 %
5	Digital input +	5	○ —	+ < 0...5 V (log "0") 10...30 V (log "1")
6	Digital input GND	6	○ —	GND
Option analogue feedback				
8	Analogue feedback +	8	○ —	+ (0/4...20 mA or 0...5/10 V) Completely galvanically isolated
7	Analogue feedback GND	7	○ —	GND


#### M8 socket, 4-pin (only for digital outputs options)

Pin	Pin assignment	Outer circuitry/Signal level		
1	Digital output 1	1	○ →	24 V/0 V, NC/NO Relative to operating voltage GND (terminal GND)
2	Digital output 2	2	○ →	24 V/0 V, NC/NO Relative to operating voltage GND (terminal GND)
3	Digital output GND	3	○ →	GND

### Position feedback with proximity switches


**Note:**

Accessories for upgrading

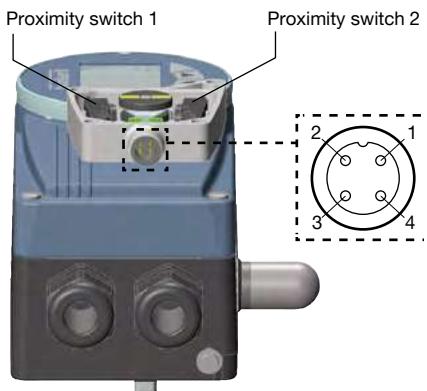

No.	Pin assignment	Outer circuitry/Signal level	
1	Supply 10...30 V	+10...30 V	—● 10...30 V
2	Switching output (NO) proximity switches 1	+10...30 V	—● Open/10...30 V
3	GND	GND	—● GND
4	Switching output (NO) proximity switches 2	+10...30 V	—● Open/10...30 V

### Screw terminal connection

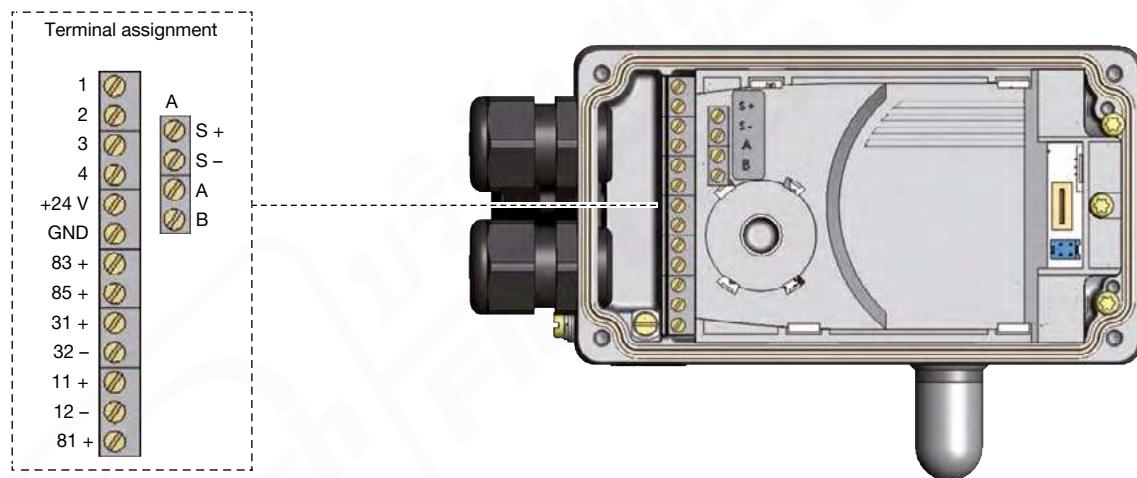

Terminal	Pin assignment	External circuitry/signal level		
11 +	Setpoint +	11 +	○	+ (0/4...20 mA or 0...5/10 V) Completely galvanically isolated
12 -	Setpoint GND	12 -	○	GND
81 +	Digital input +	81 +	○	+ 0...5 V (log. "0") 10...30 V (log. "1") Relative to operating voltage GND (terminal GND)
+24 V	Operating voltage +	+24 V	○	24 V DC ± 10 %
GND	Operating voltage GND	GND	○	Maximum residual ripple 10 %

## Analogue feedback option/digital output

Terminal	Pin assignment	Outer circuitry/Signal level		
83 +	Digital output 1	83 +	○	24 V/0 V, NC/NO Relative to operating voltage GND (terminal GND)
85 +	Digital output 2	85 +	○	24 V/0 V, NC/NO Relative to operating voltage GND (terminal GND)
31 +	Analogue feedback +	31 +	○ →	+ (0/4...20 mA or 0...5/10 V) Completely galvanically isolated
32 -	Analogue feedback GND	32 -	○ →	GND

## Remote version option in conjunction with remote position sensor Type 8798

## Note:

For variants without remote version: Terminals A, B, S+ and S- not connected


Terminal	Pin assignment		Outer circuitry/Signal level		
Remote position sensor	A	Serial interface, A-line	A	○	A-line
	B	Serial interface, B-line	B	○	B-line
	S +	Sensor supply +	S +	○	+
	S -	Sensor supply -	S -	○	-

Remote sensor Type 8798

## Remote position sensor Type 8798

Terminal	Wire colour for cable type		Pin assignment	Outer circuitry		
	1	2		1	2	3
1	White	Black	Sensor supply -	1	○	8791 or
2	Brown		Sensor supply +	2	○	8792/8793
3	Yellow	Orange	Serial interface, B-line	3	○ →	8791 or
4	Green	Red	Serial interface, A-line	4	○ →	8792/8793

## PROFIBUS DP connection

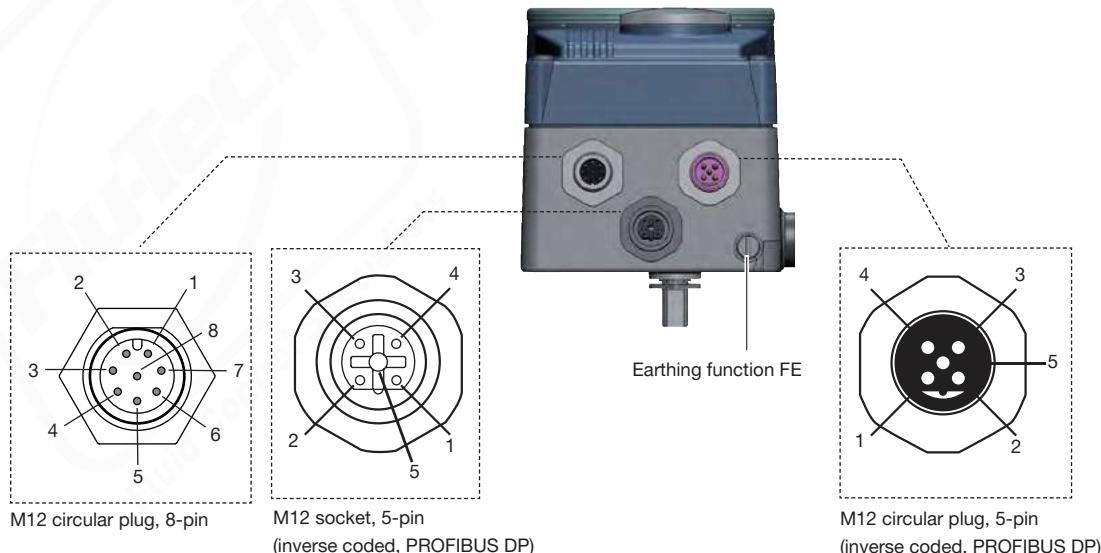

## Operating voltage, M12 circular plug, 8-pin

Pin	Pin assignment	Outer circuitry/Signal level		
1	Not assigned			
2	Not assigned			
3	GND	3		24 V DC ± 10 %
4	+24 V	4		Maximum residual ripple 10 %
5	Digital input +			
6	Digital input -			
7	Digital output 1 (relative to pin 3)			
8	Digital output 2 (relative to pin 3)			

## Fieldbus connection, M12 socket/circular plug, 5-pin

Pin	Pin assignment	Outer circuitry/Signal level
1	VP+5	Load resistance supply
2	RxD/TxD-N	Receive/transmit data -N, A-line
3	DGND	Information transfer potential (measured to 5 V)
4	RxD/TxD-P	Receive/transmit data -P, B-line
5	Shield	Shielding/protective earth

## EtherNet/IP, PROFINET, Modbus TCP connection



## M12 fieldbus connection, D-coded

Connection for EtherNet/IP takes place via an M12 screw terminals, 4-pin, D-coded


Pin	Description
1	Transmit +
2	Receive +
3	Transmit -
4	Receive -

## Operating voltage, M12 circular plug, 8-pin


Pin	Pin assignment	Device side	Outer circuitry/Signal level
1	Not assigned		
2	Not assigned		
<b>Operating voltage</b>			
3	GND	3	24 V DC $\pm 10\%$
4	+24 V	4	Maximum residual ripple 10 %
<b>Input signal of the control centre (e. g. SPS)</b>			
5	Digital input +	5	0...5 V (log. "0") 10...30 V (log. "1")
6	Digital input -	6	GND (identical to pin 3)
<b>Output signal of the control centre (e. g. SPS) - (only used with digital output option)</b>			
7	Digital output 1 (relative to pin 3)	7	0...24 V
8	Digital output 2 (relative to pin 3)	8	0...24 V

## Connection of digital remote position sensor Type 8798, M8 socket, 4-pin (optional)

Pin	Pin assignment	Device side	Outer circuitry
1	Sensor supply +	S +	+
2	Sensor supply -	S -	-
3	Serial interface, A-line	A	A-line
4	Serial interface, B-line	B	B-line


  
**Remote sensor Type 8798**

## Bürkert system bus (büs) connection

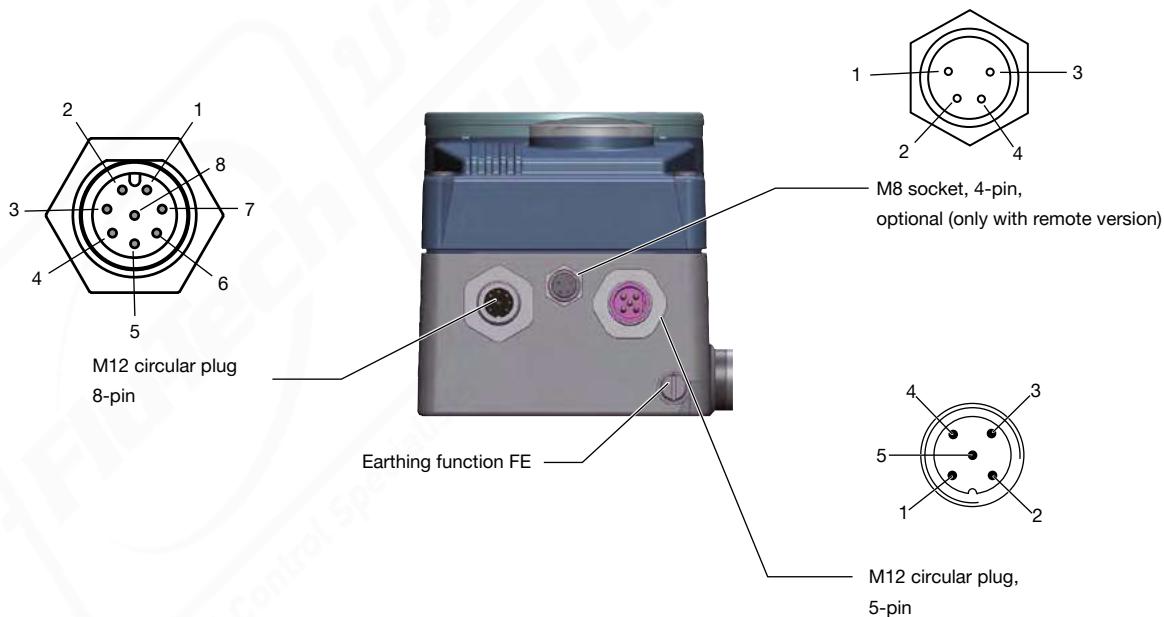

## Fieldbus connection screw terminals M12 x 1, 5-pin

Pin	Cable colour	Description
1	CAN Shielding	CAN Shielding
2	Not assigned	
3	Black	GND/CAN_GND
4	White	CAN_H
5	Blue	CAN_L

**Operating voltage, circular plug M12, 8-pin**

Pin	Pin assignment	Device side	Outer circuitry/Signal level
1	Not assigned		
2	Not assigned		
<b>Operating voltage</b>			
3	GND	3	24 V DC $\pm 10\%$
4	+24 V	4	Maximum residual ripple 10 %
<b>Input signal of the control centre (e. g. SPS)</b>			
5	Digital input +	5	0...5 V (log "0") 10...30 V (log "1")
6	Digital input -	6	GND (identical to pin 3)
<b>Output signal of the control centre (e. g. SPS) (only used with digital output option)</b>			
7	Digital output 1 (relative to pin 3)	7	0...24 V
8	Digital output 2 (relative to pin 3)	8	0...24 V

**Connection of digital remote position sensor Type 8798, M8 socket, 4-pin (optional)**

Pin	Pin assignment	Device side	Outer circuitry
1	Sensor supply +	S +	+
2	Sensor supply -	S -	-
3	Serial interface, A-line	A	A-line
4	Serial interface, B-line	B	B-line


**Connection of analogue remote position sensor, M8 socket, 4-pin (optional)**

Pin	Pin assignment	Device side	Outer circuitry
1	Potentiometer 1		
2	Wiper 2		
3	Potentiometer 3		
4	Not assigned		

## 5. Performance specifications

### 5.1. Signal flow diagram

Position control loop

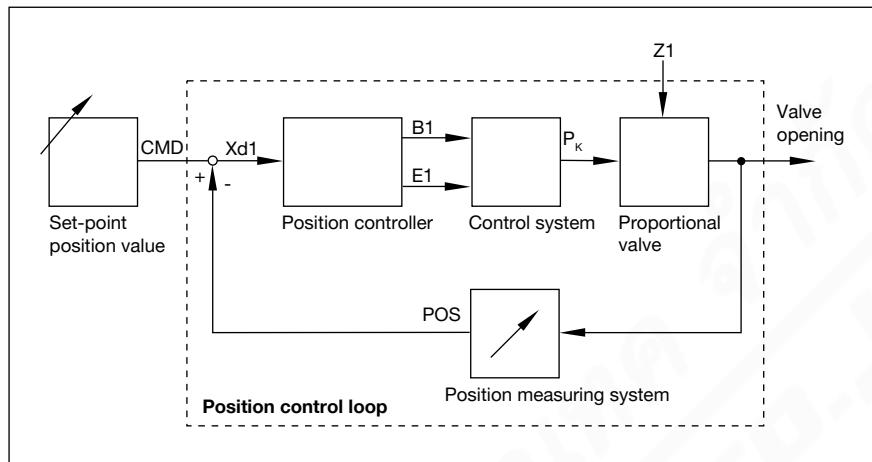


#### Additional software options of positioner SideControl Type 8792 (extract)

- Automatic commissioning of control system
- Automatic or manual characteristics curves selection
- Setting of seal and maximum stroke threshold respectively
- Parameterisation of positioner
- Limitation of stroke range
- Limitation of manipulating speed
- Setting of moving direction
- Configuration of digital input
- Signal range splitting on several controllers
- Configuration of analogue or 2 digital outputs
- Signal fault detection
- Safety position
- Code protection
- Contrast inversion of display
- Parameterizable diagnostic functions<sup>1)</sup>/digital output (option)
  - Operating-hours counter
  - Path accumulator
  - Position monitoring
  - Graphical display of dwell time density and movement range
  - Monitoring of mechanical end positions in armature

1.) Further diagnostic functions with detailed description can be found in the [operating Instructions Type 8792](#).


## 5.2. Interface diagram

### Version without fieldbus communication

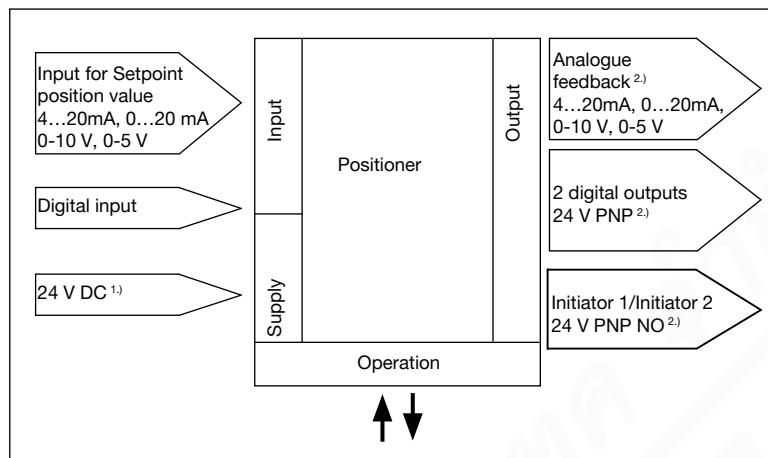

### Version with fieldbus communication

PROFIBUS DP, EtherNet/IP, PROFINET, Modbus TCP and Bürkert system bus (büS)

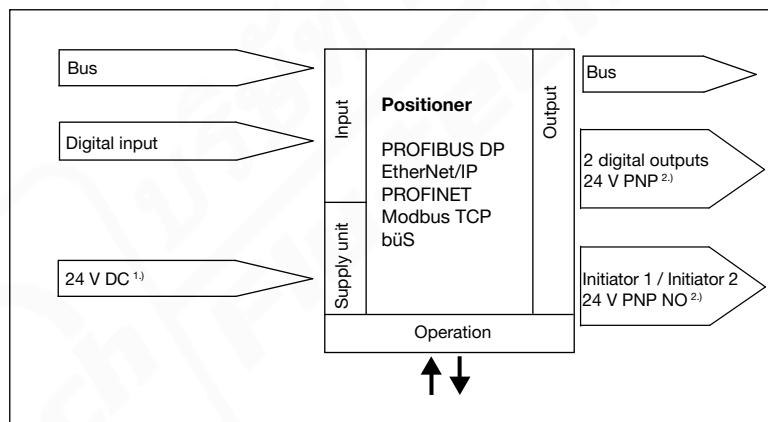

1.) Operating voltage is supplied with a 3-wire unit independent from the setpoint signal.

2.) Alternative options

## 6. Product installation

### 6.1. Mounting options

#### NAMUR version

**Note:**

Positioner with integrated position sensor, installation according to NAMUR/IEC 60534-6-1 and VDI/VDE 3845 (IEC 60534-6-2)

The NAMUR version of the SideControl positioner is equipped with an integrated position sensor (linear or rotary). It has a standardised interface for direct attachment to linear actuators according to NAMUR/IEC 60534-6-1 and VDI/VDE 3845 (IEC 60534-6-2).

Linear actuators	Rotary actuators
See <a href="#">operating manual Type 8792</a> ▶	See <a href="#">operating manual Type 8792</a> ▶



Description	Article no.	Description	Article no.
Mounting kit	787215	Adapter kit	787338
		Mounting bracket	770294

Adapter kit for rotary actuators (Article no. 787338)	Mounting bracket for rotary actuator (Article no. 770294)

Actuator shaft height [mm]	A [mm]	B [mm]	C [mm]
20	46.5	80	-
30	56.5	80	130
50	76.5	-	130

### Remote version

#### Note:

- Dimensions in mm
- 2 mounting options

The SideControl positioner remote version is used to control process control valves in combination with a remote position sensor. The remote position sensor is mounted directly on the valve to detect the valve position. The remote positioner can be mounted on the wall or on a standard rail in a control cabinet.

#### Wall mounting with accessory bracket

<table border="1"> <thead> <tr> <th>Description</th><th>Article no.</th></tr> </thead> <tbody> <tr> <td>Bracket for wall mounting</td><td>675715 </td></tr> </tbody> </table>		Description	Article no.	Bracket for wall mounting	675715		
Description	Article no.						
Bracket for wall mounting	675715						

#### Mounting on Standard rail


#### Note:

- Dimensions in mm
- Adapter can be turned by 90° the standard rail.

<table border="1"> <thead> <tr> <th>Description</th><th>Article no.</th></tr> </thead> <tbody> <tr> <td>Holder for standard rail mounting</td><td>675702 </td></tr> </tbody> </table>		Description	Article no.	Holder for standard rail mounting	675702
Description	Article no.				
Holder for standard rail mounting	675702				

**Position feedback with proximity switches****Note:**

Upgrade feature for SideControl NAMUR

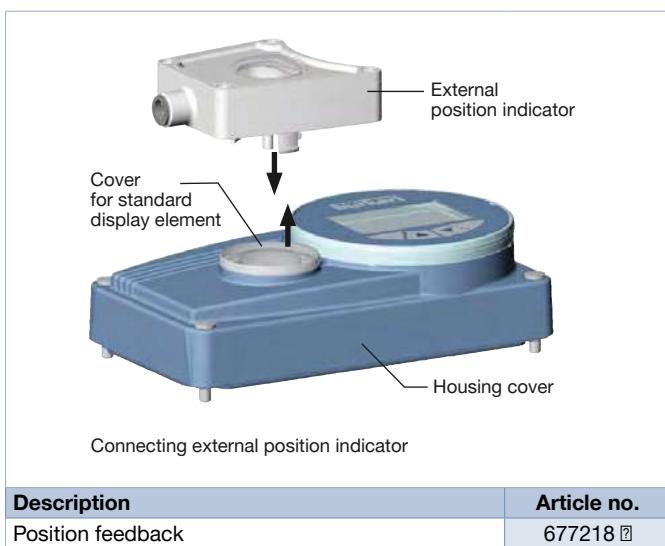

## 6.2. Combination possibilities with pneumatic process valves

**Note:**

Further information can be found in chapter “**7.3. Ordering chart**” on page 28.

Positioner SideControl 8792	8792 NAMUR	8792 Remote	8792 Remote
	 	 	 
	Linear actuators IEC 60534-6-1  Rotary actuators VDI/VDE 3845 (IEC 60534-6-2)	Linear actuators IEC 60534-6-1  Rotary actuators VDI/VDE 3845 (IEC 60534-6-2)	Control valve system
Type 8805 ► Ball valve/Butterfly valve with pneumatic rotary actuator	Type 8798 ► Remote sensor for pneumatically actuated process valves	Type 2300 ► Pneumatically actuated 2-way angle seat control valve ELEMENT + Type 8798 ► Remote sensor for pneumatically actuated process valves	

## 7. Ordering information

### 7.1. Burkert eShop



#### Burkert eShop – Easy ordering and quick delivery

You want to find your desired Burkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

### 7.2. Burkert product filter



#### Burkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Burkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

### 7.3. Ordering chart

#### Positioner SideControl Type 8792 NAMUR version

##### Note:

- Mounting according to NAMUR IEC 60534-6-1 resp. VDI/VDE 3845 (IEC 60534-6-2)
- Further versions are available on request.

Communication	Electrical connection	Analogue feedback	2 Digital output	Diagnostics <sup>1)</sup>	cCSAus	ATEX II 3 GD/IECEx CCC <sup>2)</sup>	Article no.
<b>Single and double-acting with universal air capacity</b>							
Without fieldbus communication	Cable gland	–	–	Yes	–	–	317985 ☰
		–	Yes	Yes	Yes	–	317987 ☰
		Yes	Yes	Yes	Yes	–	317986 ☰
		Yes	Yes	Yes	–	Yes	318036 ☰
	Multipole	–	–	Yes	–	–	317988 ☰
		–	Yes	Yes	Yes	–	317990 ☰
		Yes	Yes	Yes	Yes	–	317989 ☰
PROFIBUS DP-V1	Multipole	Via bus	–	Yes	–	–	206616 ☰
		Via bus	–	–	–	Yes	310308 ☰
		Via bus	Yes	Yes	–	Yes	310309 ☰
		Via bus	Yes	Yes	Yes	–	206617 ☰
EtherNet/IP	Multipole	Via bus	–	Yes	Yes	–	317932 ☰
		Via bus	Yes	Yes	Yes	–	317933 ☰
		Via bus	–	Yes	–	Yes	317938 ☰
		Via bus	Yes	Yes	–	Yes	317939 ☰
PROFINET	Multipole	Via bus	–	Yes	Yes	–	317942 ☰
		Via bus	Yes	Yes	Yes	–	317943 ☰
		Via bus	–	Yes	–	Yes	317948 ☰
		Via bus	Yes	Yes	–	Yes	317949 ☰
Modbus TCP	Multipole	Via bus	–	Yes	Yes	–	317952 ☰
		Via bus	Yes	Yes	Yes	–	317953 ☰
		Via bus	–	Yes	–	Yes	317958 ☰
		Via bus	Yes	Yes	–	Yes	317959 ☰
Bürkert system bus (büS)	Multipole	Via bus	–	Yes	Yes	–	317962 ☰
		Via bus	Yes	Yes	Yes	–	317963 ☰
		Via bus	–	Yes	–	Yes	317968 ☰
		Via bus	Yes	Yes	–	Yes	317969 ☰

1.) See "Additional software options of positioner SideControl Type 8792 (extract)" on page 21

2.) CCC (China Compulsory Certificate) for device versions with Ex approval



**Positioner SideControl Type 8792 remote version****Note:**

Further versions are available on request.

Communication	Electrical connection	Analogue feedback	2 Digital output	Diagnostics <sup>1)</sup>	cCSAus	ATEX II 3 GD/IECEx CCC <sup>2)</sup>	Article no.
<b>Single-acting with low air capacity for actuator series Type 23xx (Ø70/90 mm)</b>							
Without fieldbus communication	Cable gland	Yes	Yes	Yes	Yes	–	318010 ☰
		–	Yes	Yes	Yes	–	318011 ☰
EtherNet/IP	Multipole	Via bus	Yes	Yes	Yes	–	317936 ☰
PROFINET		Via bus	Yes	Yes	Yes	–	317946 ☰
Modbus TCP		Via bus	Yes	Yes	Yes	–	317956 ☰
Bürkert system bus (biüS)		Via bus	Yes	Yes	Yes	–	317966 ☰
<b>Single and double-acting with universal air capacity for actuator series Type 23xx (Ø130/225 mm) and 27xx (Ø175/225 mm)</b>							
Without fieldbus communication	Cable gland	–	–	–	Yes	–	317991 ☰
		Yes	Yes	Yes	Yes	–	317992 ☰
		–	Yes	Yes	Yes	–	317993 ☰
		Yes	Yes	Yes	–	Yes	318038 ☰
EtherNet/IP	Multipole	Via bus	Yes	Yes	Yes	–	317935 ☰
PROFINET		Via bus	Yes	Yes	Yes	–	317945 ☰
Modbus TCP		Via bus	Yes	Yes	Yes	–	317955 ☰
Bürkert system bus (biüS)		Via bus	Yes	Yes	Yes	–	317965 ☰

1.) See "Additional software options of positioner SideControl Type 8792 (extract)" on page 21

2.) CCCC (China Compulsory Certificate) for device versions with Ex approval

**Remote position sensor for remote version of SideControl Type 8792**

Product	Mounting version	Electrical connection	cULus	ATEX II 3 GD/IECEx CCC <sup>1)</sup>	Article no.
<b>Mounting on control valves</b>					
	Control valve Type 23xx	Cable gland - 10 m round cable	Yes	–	300730 ☰
		Cable gland - 10 m round cable	–	Yes	20003944 ☰
		Multipole - 10 m round cable	Yes	–	307956 ☰
	Control valve Type 27xx	Cable gland - 10 m round cable	Yes	–	211535 ☰
		Cable gland - 10 m round cable	–	Yes	226859 ☰
		Multipole - 10 m round cable	Yes	–	329888 ☰
<b>NAMUR mounting</b>					
	NAMUR (rotative)	Cable gland 2 m round cable (extendable to 10 m maximum)	Yes	–	211536 ☰

1.) CCC (China Compulsory Certificate) for device versions with Ex approval



#### 7.4. Ordering chart accessories

##### Standard accessories

**Note:**

The associated communication software can be downloaded under **Type 8792 ▶**.

Description	Article no.
M12 circular socket with cable, 8-pin, cable length: 5 m, for input and output signals	919267 ⓥ
M8 plug, 4-pin for digital outputs, with solder joints	917131 ⓥ
USB büS interface set 2 (Type 8923) for connection to the Burkert Communicator software: including büS stick, connection cable to M12 plug, M12 connection cable on micro USB for the büS service interface and Y distributor, cable length: 0.7 m	772551 ⓥ
büS cable extension, M12, cable length: 1 m	772404 ⓥ
büS cable extension, M12, cable length: 3 m	772405 ⓥ
büS cable extension, M12, cable length: 5 m	772406 ⓥ
büS cable extension, M12, cable length: 10 m	772407 ⓥ
Silencer G 1/4	780780 ⓥ
USB interface for serial communication	227093 ⓥ
Software Burkert Communicator	<b>Type 8920 ▶</b>
AS-Interface flat cable clamp, M12 outlet, stainless steel outlet	799646 ⓥ

##### Accessories SideControl NAMUR

**Note:**

Further information can be found in chapter “**6. Product installation**” on page 23.

Description	Article no.
VDI/VDE 3845 stainless steel universal assembly bridge (IEC60534-6-2)	770294 ⓥ
Attachment kit for stainless steel rotary actuators according to VDI/VDE 3845 (IEC 60534-6-2)	787338 ⓥ
Attachment kit for linear actuators according to IEC 60534-6-1	787215 ⓥ
Position feedback with proximity switches (optional upgrade feature) <sup>1.)</sup>	677218 ⓥ

1.) External end position feedback for upgrading SideControl NAMUR

##### Accessories SideControl Remote

Description	Article no.
Mounting bracket for stainless steel wall mount (spare part), see “ <b>6. Product installation</b> ” on page 23	675715 ⓥ
Standard rail assembly kit aluminium/stainless steel, see “ <b>6. Product installation</b> ” on page 23	675702 ⓥ
Attachment kit for Type 21xx/23xx actuator series, actuator size Ø 70/90/130 mm	679917 ⓥ
Attachment kit for Type 21xx/23xx actuator series, actuator size Ø 225 mm	60025906 ⓥ
Adapter kit remote sensor, control valves Type 27xx, actuator size Ø 175/225 mm	679945 ⓥ
Sensor puck (replacement part)	682240 ⓥ

