



Magnetic inductive sensor with hygienic process connections

- For connection to a transmitter Type SE58 (with or without display, in compact or remote variant) for flow measurement
- Hygienic variant, 3A certificate
- For food and beverage or pharmaceutical applications
- Flow rate measurements 0.2...approx 4.500 l/min for DN 03...DN 100

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type SE58	L variant of the transmitter for electromagnetic-inductive flow sensors
	Type SE58	M variant of the transmitter for electromagnetic-inductive flow sensors
	Type SE58	S variant of the transmitter for electromagnetic-inductive flow sensors

Type description

The magnetically inductive flow sensor Type S056 (compact or remote version) is suitable for low-flow applications and liquids with minimum conductivity.

The combination with the dedicated Type SE58 S transmitter (minimum required conductivity: 20 µS/cm) or with the Type SE58 M or Type SE58 L transmitters (minimum conductivity required: 5 µS/cm) results in a flowmeter with different performance, functions, materials and approvals, with the corresponding suitability for the respective applications depending on the respective requirements.

With the Type SE58 S you get a compact device, with the Type SE58 M and Type SE58 L compact devices or remote versions are created for which the transmitter and sensor are connected by 2 cables up to a maximum length. Standard process connections available for the Type S056 are clamp or thread (dairy thread) connections.



Table of contents

1. General technical data	3
2. Approvals and conformities	5
2.1. Conformity	5
2.2. Standards.....	5
3. Materials	5
3.1. Burkert resistApp	5
4. Dimensions	6
4.1. Compact variant.....	6
Pipe connection according to DIN 11851	6
Pipe connection according to clamp ISO 2852 or BS 4825	7
4.2. Remote variant with junction box	8
Pipe connection according to DIN 11851	8
Pipe connection according to clamp ISO 2852 or BS 4825	9
5. Product installation	10
5.1. Installation notes.....	10
Flow measurement.....	10
5.2. Selection of the nominal diameter	11
6. Product operation	11
6.1. Measuring principle.....	11
7. Ordering information	12
7.1. Burkert eShop.....	12
7.2. Recommendation regarding product selection.....	12
7.3. Burkert product filter	12
7.4. Ordering chart.....	13
7.5. Ordering chart accessories.....	15

1. General technical data

Note:

Empty pipe functionality is not available for sensors with connections of DN 03...DN 20.

The electromagnetic flow sensor Type S056 in a compact or remote variant is intended for use with transmitter Type SE58, which is available in three variants L, M or S.



Further information can be found in the data sheet of the transmitter, see [data sheet Type SE58 ▶](#).

Product properties

Material

Non wetted parts

Sensor housing	Stainless steel 304/1.4301
Junction box	Only for remote sensor: stainless steel 304 (1.4301) polished

Wetted parts

Lining	PTFE (conform to FDA)
Electrode	Stainless steel 316L (conform to FDA)
Seal	FKM (conform to FDA), EPDM (on request, conform to FDA)
Pipe diameter	DN 03...DN 100
Dimensions	Further information can be found in chapter " 4. Dimensions " on page 6.
Measuring principle	Electromagnetic induction Further information can be found in chapter " 6.1. Measuring principle " on page 11.
Measuring range	0...10 l/h to 0...280 m ³ /h Further information can be found in chapter " 7.4. Ordering chart " on page 13.

Performance data

At reference conditions and according to internal test procedures:

- At room temperature
- Constant flow rate during the test, liquid speed >1 m/s
- Pressure: >30 Kpa
- Flow condition: observed inlet and outlet conditions
- Zero point stability: ± 0.005 %

Measurement deviation	If used with Type SE58 transmitter: <ul style="list-style-type: none"> • in compact or remote L variant: ≤ ± 0.2 % of the measured value for flow velocity >0.5 m/s • in compact or remote M variant: ≤ ± 0.8 % of the measured value for flow velocity >0.5 m/s • in compact S variant: ≤ ± 0.5 % of the measured value for flow velocity >0.5 m/s See data sheet Type SE58 ▶
Repeatability	If used with Type SE58 transmitter: <ul style="list-style-type: none"> • in compact or remote L variant: ≤ ± 0.1 % of the measured value for flow velocity >0.5 m/s • in compact or remote M variant: ≤ ± 0.4 % of the measured value for flow velocity >0.5 m/s • in compact S variant: ≤ ± 0.25 % of the measured value for flow velocity >0.5 m/s See data sheet Type SE58 ▶
Vacuum resistance	200 mbar (2.9 PSI) absolute at 100 °C (212 °F)

Medium data

Fluid temperature	If used with transmitter Type SE58: <ul style="list-style-type: none"> • in compact variant: -20...+110 °C (-4...+230 °F) (130 °C (+266 °F) allowed for 60 min for steam/hot water cleaning) • in remote variant: -20...+130 °C (-4...+266 °F)
Fluid pressure	PN 16
Minimum conductivity	5 µS/cm (or 20 µS/cm with demineralised water)

Process/Pipe connection & communication

Pipe connection	DIN 11851, clamp ISO 2852 or clamp BS 4825 (SMS 1146 (from DN 10) on request)
Electrical connection	2 cable glands PG9 (for remote variant of the sensor)

Approvals and conformities**Directives**

CE directive	Further information on the CE directive can be found in chapter " 2.2. Standards " on page 5.
Pressure equipment directive	The device is subject to the requirements of the Pressure Equipment Directive 2014/68/EU. Category II device for group 1 and 2 fluids under the following conditions: <ul style="list-style-type: none"> • maximum allowable pressure (PS) ≤ 40 bar • minimum/maximum temperature (TS): -10/+130 °C • within the following limits for liquids of group 2: <ul style="list-style-type: none"> – PN 40 for DN 40...DN 250 • within the following limits for liquids of group 1 with a vapour pressure at the maximum allowable temperature not exceeding 0.5 bar (g): for diameters above DN 25 and PS × DN > 2000

Environment and installation

Ambient temperature	According to the used version of SE58 transmitter and its material Detailed information can be found in the data sheet of the transmitter, see data sheet Type SE58 .
Relative air humidity	≤ 90 %, without condensation
Height above sea level	Max. 2000 m
Operating condition	Continuous
Equipment mobility	Fixed
Application range	Indoor and outdoor Protect the device against electromagnetic interference, ultraviolet rays and against the effects of climatic conditions.
Degree of protection according to IEC/EN 60529	If use with SE58 transmitter: <ul style="list-style-type: none"> • in compact L and M variant: IP67 (IP68 optional) • in compact S variant: IP67 (IP68 optional) • in remote L and M variant: IP68
Installation category	Category II according to UL/EN 61010-1
Pollution degree	Degree 2 according to UL/EN 61010-1

2. Approvals and conformities

2.1. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

2.2. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

3. Materials

3.1. Bürkert resistApp



Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)


4. Dimensions

4.1. Compact variant

Pipe connection according to DIN 11851

Note:

- Further information on the dimensions of the Type SE58 transmitter can be found in **data sheet Type SE58 ▶**.
- Dimensions in mm, unless otherwise stated

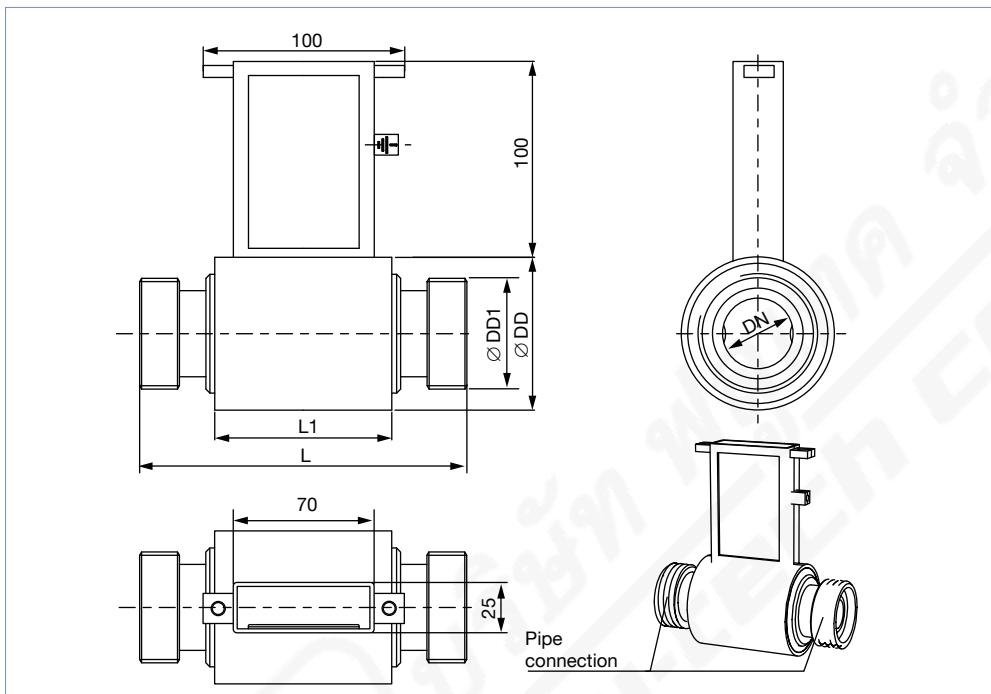


DN	Pipe connection	L	L1	ØD	ØD1
03	DN 10	128	77	76	RD28x $\frac{1}{8}$
06					RD28x $\frac{1}{8}$
10					RD28x $\frac{1}{8}$
15	DN 15				RD34x $\frac{1}{8}$
20	DN 20				RD44x $\frac{1}{6}$
25	DN 25	180	100		RD52x $\frac{1}{6}$
32	DN 32			89	RD58x $\frac{1}{6}$
40	DN 40				RD65x $\frac{1}{6}$
50	DN 50			114	RD78x $\frac{1}{6}$
65	DN 65			140	RD95x $\frac{1}{6}$
80	DN 80	200			RD110x $\frac{1}{4}$
100	DN 100			168	RD130x $\frac{1}{4}$

Pipe connection according to clamp ISO 2852 or BS 4825

Note:

- Further information on the dimensions of the Type SE58 transmitter can be found in **data sheet Type SE58 ▶**
- Dimensions in mm, unless otherwise stated

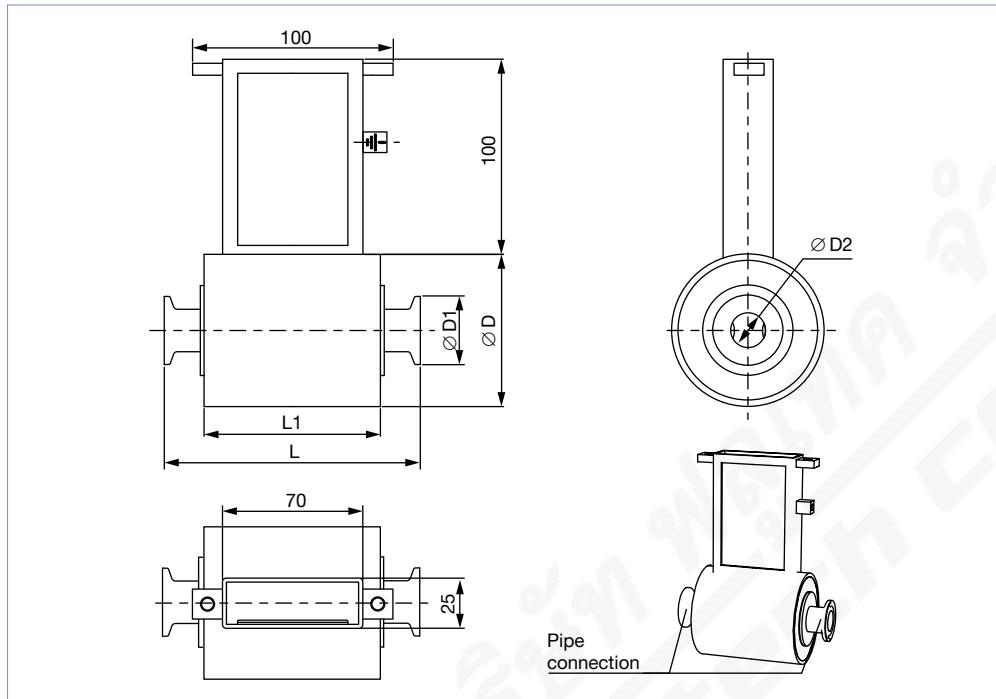


DN	Standard	L	L1	Ø D	Ø D1	Ø D2
03	Clamp ISO 2852	128	77	76	34	12.7
	Clamp BS 4825				25.4	9.5
06	Clamp ISO 2852				34	12.7
	Clamp BS 4825				25.4	9.5
10	Clamp ISO 2852				34	12.7
	Clamp BS 4825				25.4	9.5
15	Clamp ISO 2852				34	17.2
	Clamp BS 4825				25.4	15.85
20	Clamp ISO 2852				34	21.3
	Clamp BS 4825				50.5	22.2
25	Clamp ISO 2852	180	100		50.5	22.6
	Clamp BS 4825				50.5	22.2
40	Clamp ISO 2852			89	50.5	35.6
	Clamp BS 4825				50.5	34.9
50	Clamp ISO 2852			114	64	48.6
	Clamp BS 4825				64	47.6
65	Clamp ISO 2852			140	77.5	60.3
	Clamp BS 4825				77.5	60.3
80	Clamp ISO 2852	200			91	72.9
	Clamp BS 4825				91	72.9
100	Clamp ISO 2852			180	119	97.6
	Clamp BS 4825				119	97.6

4.2. Remote variant with junction box

Pipe connection according to DIN 11851

Note:

- Further information on the dimensions of the Type SE58 transmitter can be found in **data sheet Type SE58 ▶**.
- Dimensions in mm, unless otherwise stated

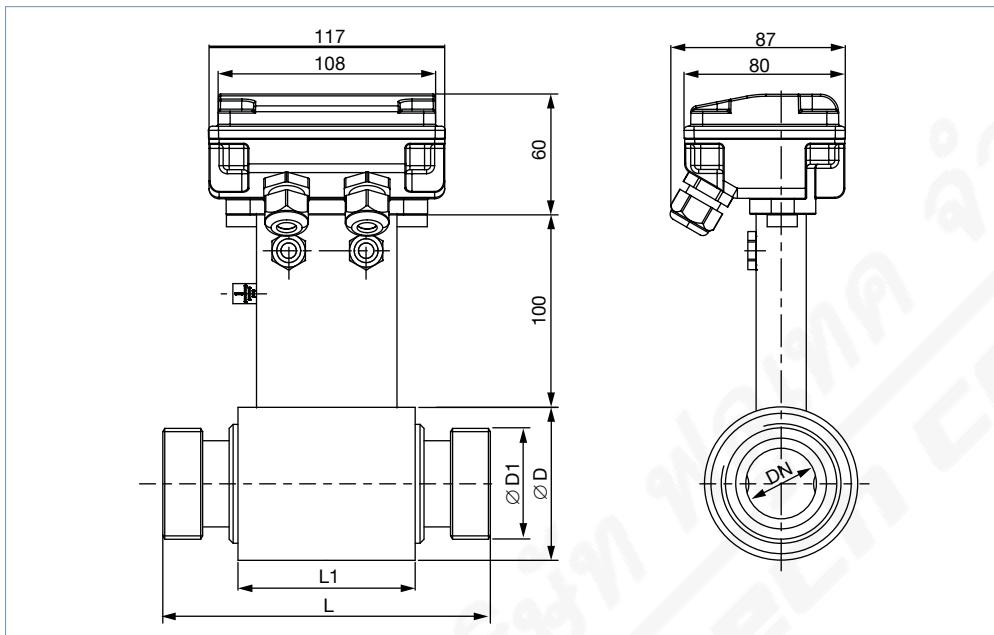


DN	Pipe connection	L	L1	ØD	ØD1
03	DN 10	128	77	76	RD28x $\frac{1}{8}$
06					RD28x $\frac{1}{8}$
10					RD28x $\frac{1}{8}$
15	DN 15				RD34x $\frac{1}{8}$
20	DN 20				RD44x $\frac{1}{6}$
25	DN 25	180	100	89	RD52x $\frac{1}{6}$
32	DN 32				RD58x $\frac{1}{6}$
40	DN 40				RD65x $\frac{1}{6}$
50	DN 50			114	RD78x $\frac{1}{6}$
65	DN 65			140	RD95x $\frac{1}{6}$
80	DN 80	200			RD110x $\frac{1}{4}$
100	DN 100			168	RD130x $\frac{1}{4}$

Pipe connection according to clamp ISO 2852 or BS 4825

Note:

- Further information on the dimensions of the Type SE58 transmitter can be found in **data sheet Type SE58 ▶**.
- Dimensions in mm, unless otherwise stated

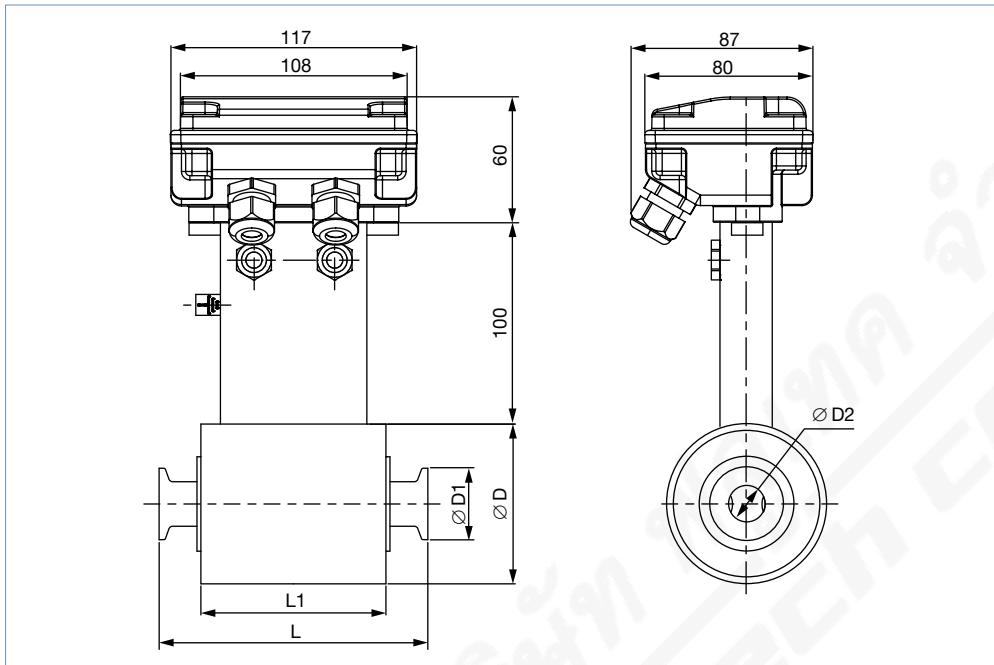

DN	Standard	L	L1	Ø D	Ø D1	Ø D2
03	Clamp ISO 2852	128	77	76	34	12.7
	Clamp BS 4825				25.4	9.5
06	Clamp ISO 2852				34	12.7
	Clamp BS 4825				25.4	9.5
10	Clamp ISO 2852				34	12.7
	Clamp BS 4825				25.4	9.5
15	Clamp ISO 2852				34	17.2
	Clamp BS 4825				25.4	15.85
20	Clamp ISO 2852				34	21.3
	Clamp BS 4825				50.5	22.2
25	Clamp ISO 2852	180	100		50.5	22.6
	Clamp BS 4825				50.5	22.2
40	Clamp ISO 2852			89	50.5	35.6
	Clamp BS 4825				50.5	34.9
50	Clamp ISO 2852			114	64	48.6
	Clamp BS 4825				64	47.6
65	Clamp ISO 2852			140	77.5	60.3
	Clamp BS 4825				77.5	60.3
80	Clamp ISO 2852	200			91	72.9
	Clamp BS 4825				91	72.9
100	Clamp ISO 2852			180	119	97.6
	Clamp BS 4825				119	97.6

5. Product installation


5.1. Installation notes

Flow measurement

Note:


The device is not suitable for use in gaseous media and steam.

Minimum straight distances upstream and downstream of the sensor must be observed.

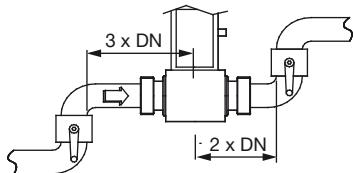

The device can be installed in either horizontal or vertical pipes, but following additional conditions should be respected:

- The pipe always has to be filled with fluid at all times near the device, when it is in operation.
- Mount the sensor in the indicated positions shown below to obtain an accurate flow measurement.

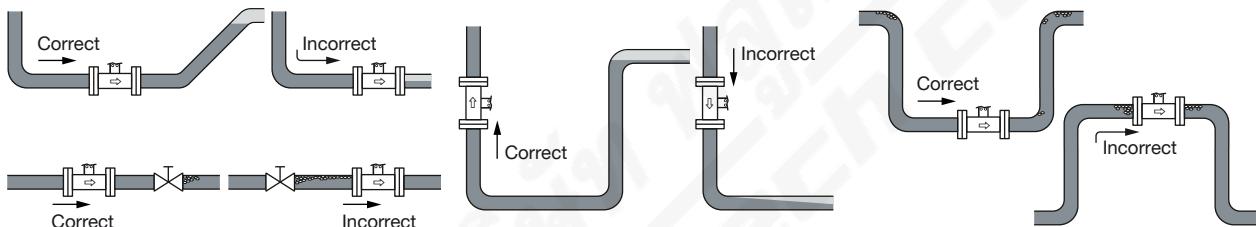

The suitable pipe size is selected using the diagram in the chapter “[5.2. Selection of the nominal diameter](#)” on page 11.


5.2. Selection of the nominal diameter

The following graph is used to determine the appropriate DN of the pipe and fitting for the application, according to the fluid velocity and the flow rate. On the chart, the intersection of flow velocity and flow rate gives the appropriate diameter.

Example:

- Nominal flow: 10 l/min
- Optimal flow rate: 2...3 m/s

Result: Select a pipe size of DN 10

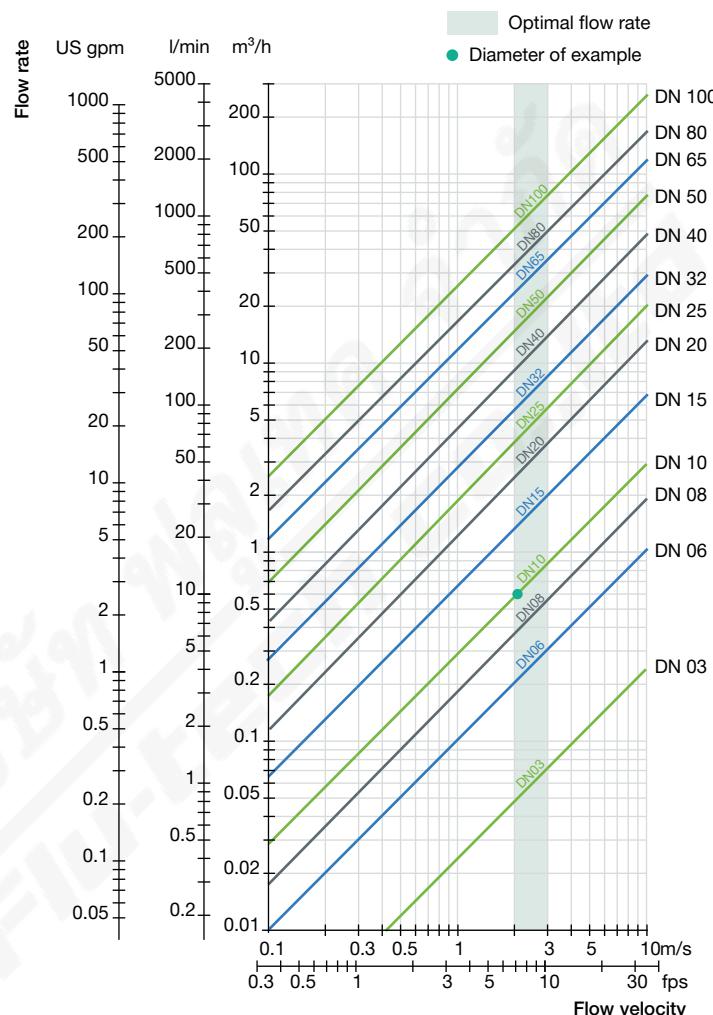

6. Product operation

6.1. Measuring principle

Faraday's law serves as the physical basis for magnetic flow measurement.

Magnetic coils are arranged around the pipeline to generate a magnetic field. Conductive liquids flowing through the magnetic field induce a voltage at two opposite metallic electrodes in contact with the medium. These electrodes are used to measure the induced electrical alternating voltage.

The signal of sensor Type S056 must be amplified and processed by transmitter Type SE58.

Detailed information on the dimensions of the SE58 transmitter can be found in **data sheet Type SE58 ▶**.

7. Ordering information

7.1. Burkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Burkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

7.2. Recommendation regarding product selection

A complete flowmeter consists of a Type S056 (compact or remote variant) and a Type SE58 transmitter (compact or remote variant).

See [data sheet Type SE58](#) ▶ for more information.

Two different components must be ordered in order to select a complete device. The following information is required:

- Article no. of the sensor **Type S056** (see “[7.4. Ordering chart](#)” on page 13)
- Article no. of the transmitter **Type SE58** (see [data sheet Type SE58](#) ▶ for more information)

7.3. Burkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements?
Use the Burkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

7.4. Ordering chart

DN [mm]	Flow rate range		Pipe connection	Material				Article no.
	Min. 0...0.4 m/s	Max. 0...10 m/s		Housing	Electrode ¹⁾	Seal	Lining	
Sensor Type S056, compact variant								
03	0...0.01 m ³ /h	0...0.25 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	555732 ☰
			Clamp ISO 2852					554004 ☰
			Clamp BS 4825					559786 ☰
06	0...0.04 m ³ /h	0...1 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	559430 ☰
			Clamp ISO 2852					559431 ☰
			Clamp BS 4825					553325 ☰
10	0...0.12 m ³ /h	0...3 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	559432 ☰
			Clamp ISO 2852					554904 ☰
			Clamp BS 4825					554350 ☰
15	0...0.24 m ³ /h	0...6 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	553527 ☰
			Clamp ISO 2852					553555 ☰
			Clamp BS 4825					553533 ☰
20	0...0.50 m ³ /h	0...12.5 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	553528 ☰
			Clamp ISO 2852					559433 ☰
			Clamp BS 4825					553534 ☰
25	0...0.72 m ³ /h	0...18 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	553486 ☰
			Clamp ISO 2852					554151 ☰
			Clamp BS 4825					553535 ☰
32	0...1.16 m ³ /h	0...29 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	553529 ☰
40	0...1.80 m ³ /h	0...45 m ³ /h	DIN 11851					553530 ☰
			Clamp ISO 2852					553741 ☰
			Clamp BS 4825					553536 ☰
50	0...2.88 m ³ /h	0...72 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	553531 ☰
			Clamp ISO 2852					555120 ☰
			Clamp BS 4825					553537 ☰
65	0...4.80 m ³ /h	0...120 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	553532 ☰
			Clamp ISO 2852					554116 ☰
			Clamp BS 4825					553538 ☰
80	0...7.20 m ³ /h	0...180 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	555089 ☰
			Clamp ISO 2852					559434 ☰
			Clamp BS 4825					559791 ☰
100	0...11.20 m ³ /h	0...280 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	On request
			Clamp ISO 2852					On request
			Clamp BS 4825					On request

DN [mm]	Flow rate range		Pipe connection	Material				Article no.
	Min. 0...0.4 m/s	Max. 0...10 m/s		Housing	Electrode ¹⁾	Seal	Lining	
Sensor Type S056, remote variant with junction box in stainless steel 304 (1.4301) polished and 10 m electrodes and coils cables (included)								
03	0...0.01 m ³ /h	0...0.25 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	551506 ☰
			Clamp ISO 2852					551501 ☰
			Clamp BS 4825					559787 ☰
06	0...0.04 m ³ /h	0...1 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	551507 ☰
			Clamp ISO 2852					551502 ☰
			Clamp BS 4825					559788 ☰
10	0...0.12 m ³ /h	0...3 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	551508 ☰
			Clamp ISO 2852					551503 ☰
			Clamp BS 4825					559759 ☰
15	0...0.24 m ³ /h	0...6 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	551509 ☰
			Clamp ISO 2852					551504 ☰
			Clamp BS 4825					554082 ☰
20	0...0.50 m ³ /h	0...12.5 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	551510 ☰
			Clamp ISO 2852					551505 ☰
			Clamp BS 4825					553925 ☰
25	0...0.72 m ³ /h	0...18 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	448480 ☰
			Clamp ISO 2852					448499 ☰
			Clamp BS 4825					559789 ☰
32	0...1.16 m ³ /h	0...29 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	448481 ☰
40	0...1.80 m ³ /h	0...45 m ³ /h	DIN 11851					448482 ☰
			Clamp ISO 2852					448501 ☰
			Clamp BS 4825					554147 ☰
50	0...2.88 m ³ /h	0...72 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	448483 ☰
			Clamp ISO 2852					448502 ☰
			Clamp BS 4825					554138 ☰
65	0...4.80 m ³ /h	0...120 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	448484 ☰
			Clamp ISO 2852					448503 ☰
			Clamp BS 4825					559790 ☰
80	0...7.20 m ³ /h	0...180 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	448485 ☰
			Clamp ISO 2852					448504 ☰
			Clamp BS 4825					558854 ☰
100	0...11.20 m ³ /h	0...280 m ³ /h	DIN 11851	Stainless steel 304	Stainless steel 316L	FKM	PTFE	448486 ☰
			Clamp ISO 2852					448505 ☰
			Clamp BS 4825					On request

1.) 2 measuring electrodes

Further variants on request

	Process connection SMS 1146 (from DN 10)		Material Seal: EPDM
--	--	--	-------------------------------

7.5. Ordering chart accessories

Accessories for remote sensor	No.	Description	Article no.
Without junction box	1	10 m cable for electrodes ^{1.)} For connecting the sensor (variant without junction box) Type S051, S054, S055 or S056 to the connecting box of the extension cable set	448518 ☰
	2	10 m cable for coils ^{1.)} For connecting the sensor (variant without junction box) Type S051, S054, S055 or S056 to the connecting box of the extension cable set	448519 ☰
With junction box	3	10 m cable for electrodes ^{1.)} For connecting <ul style="list-style-type: none"> • the connecting box of the extension cable set to the transmitter Type SE58 • the sensor (variant with junction box) Type S051, S054, S055 or S056 to the transmitter Type SE58 	562851 ☰
	4	10 m cable for coils ^{1.)} For connecting <ul style="list-style-type: none"> • the connecting box of the extension cable set to the transmitter Type SE58 • the sensor (variant with junction box) Type S051, S054, S055 or S056 to the transmitter Type SE58 	562852 ☰
	5	Connecting box of the extension cable set including resin	562853 ☰

1.) Cable lengths other than 10 m on request (for cables length >20 m, a preamplifier is supplied for an additional charge).