



Pneumatic rotary actuator for the automation of ball and butterfly valves

- Combination with top control positioner Type 8691/8692/8693/8694 possible
- Ideally suited for hygienic applications
- 100 % maintenance-free (welded stainless steel housing)
- Streamline design
- Standardised interface according to ISO 5211

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 2654 2/2-way ball valve, 3-piece
	Type 2651 2/2-way or 3/2-way ball valve, 2-piece
	Type 2657 Ball valve, manually operated
	Type 8691 Control head for decentralised automation of ELEMENT process valves
	Type 8692 Digital electro-pneumatic positioner for integrated mounting on process control valves
	Type 8693 Digital electropneumatic process controller for integrated mounting on process control valves

Type description

The pneumatic actuator Type 2053 enables the automated actuation of ball and butterfly valves. The linear stroke movement of the actuator piston is deflected into a 90° rotary movement of the drive shaft. The interface on the armature is designed according to ISO 5211. In addition, the rotary actuator can be combined with the 8691/2/3/4 series position feedback sensors. The single-acting actuators are returned to the initial position by spring force, while double-acting actuators are returned by compressed air. The welded construction of the stainless steel housing ensures the actuator is 100% maintenance-free. Overall, the actuator is available in three different sizes: P0 - P1 - P2. All three sizes have an extremely high torque in the closing area despite their compact design. The air consumption per stroke cycle is very low due to the low cylinder volume. This offers a remarkable energy saving potential.

Table of contents

1. General technical data	3
2. Approvals and conformities	3
2.1. General notes	3
2.2. Conformity	3
2.3. Standards.....	3
3. Control functions	4
4. Materials	4
4.1. Burkert resistApp.....	4
4.2. Material specifications.....	4
Central section	4
Interface for ELEMENT control heads and positioners.....	5
Cover.....	5
Bottom plate	5
5. Dimensions	6
5.1. Variant P0.....	6
5.2. Variant P1.....	7
5.3. Variant P2.....	8
6. Performance specifications	9
6.1. Torque chart	9
Single-acting.....	9
Double-acting.....	9
6.2. Air consumption	9
7. Product operation	9
7.1. Functional overview	9
8. Networking and combination with other Burkert products	10
9. Ordering information	11
9.1. Burkert eShop	11
9.2. Burkert product filter	11
9.3. Ordering chart.....	11
Double-acting, control head/positioner ready	11
Double-acting.....	11
Single-acting, control head/positioner ready	12
Single-acting.....	12
9.4. Ordering chart accessories.....	12
Form seal for control units of Type 8691/8692/8693/8694	12
Angled connector	12
Silencer.....	12
Reducing sleeves.....	13

1. General technical data

Product properties

Dimensions	Further information can be found in chapter " 5. Dimensions " on page 6 .
------------	---

Material

Drive shaft	Stainless steel 1.4301/304
Seal	NBR
Housing	Stainless steel 1.4301/304
Piston	PA
	Further information on materials can be found in chapter " 4. Materials " on page 4 .

Performance data

Rotation angle	90°
Pilot pressure	Single-acting actuator: 4.8...8 bar Double-acting: 3...8 bar

Medium data

Control medium	Filtered oil-free or lubricated compressed dry air
----------------	--

Control medium specifications

Dust content	Class 5 (< 40 µm particle size)
Particle density	Class 5 (< 10 mg/m³)
Pressure dew point	Class 4 (< 3 °C)
Oil concentration	Class 5 (< 25 mg/m³)

Process/Port connection & communication

Pilot air ports	G 1/8
Armature-side interface	According to ISO 5211
Control head/Positioner interface	ELEMENT FA03

Environment and installation

Ambient temperature	-10 °C...+ 60 °C
---------------------	------------------

2. Approvals and conformities

2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants can be supplied with the below mentioned approvals or conformities.

2.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

2.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

3. Control functions

Symbol	Description
	Control function A (CF A) Pneumatically operated 2/2-way on/off valve Flow direction above seat Normally closed by spring force
	Control function I (CF I) Pneumatically operated 2/2-way on/off valve on either side Bidirectional Switching position dependent on external control

4. Materials

4.1. Burkert resistApp




Burkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)


4.2. Material specifications

Central section

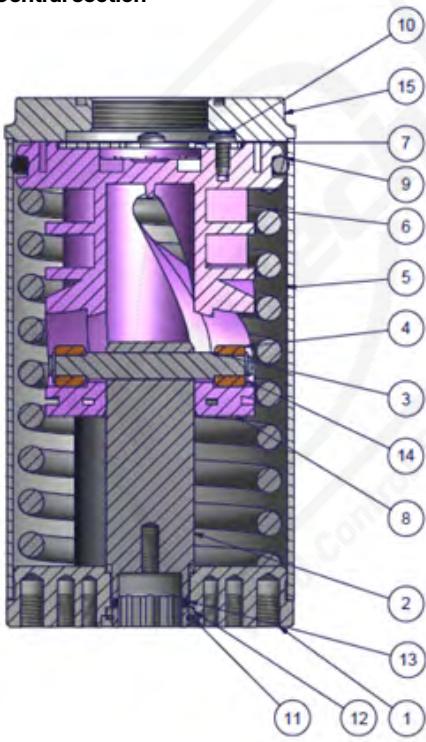


No.	Quantity	Element	Material
1	1	Bottom plate	Stainless steel 1.4301/304
2	1	Drive shaft	Stainless steel 1.4301/304
3	1	Parallel pin	Stainless steel 1.4301/1.4404/304/316L
4	2	Roller	20.401
5	1	Housing tube	Stainless steel 1.4301/304
6	1	Compression spring	Edelstahl 1.7102/54SiCr6
7	1	Retaining washer	Stainless steel 1.4301/304
8	1	Piston	PA
9	1	O-ring 72 x 5.2	NBR
10	3	Screw WN E5451 40 x 10-S	Stainless steel A2/404
11	1	Snap ring XFS- 023	Stainless steel 1.4310/302
12	2	Sliding disk	IGLIDUR W300
13	1	O-ring 19 x 2	NBR
14	2	Lock washer DIN 6799 - 5.0	Stainless steel A2/304
15	1	Cover	Stainless steel 1.4301/304

Interface for ELEMENT control heads and positioners




No.	Quantity	Element	Material
1	1	Spindle	Stainless steel 1.4301/304
2	1	Adaptor bolt	Stainless steel 1.4301/304
3	1	O-ring 37.77 x 2.62	NBR
4	1	Stem seal	EPDM
5	1	Socket	DU

Cover

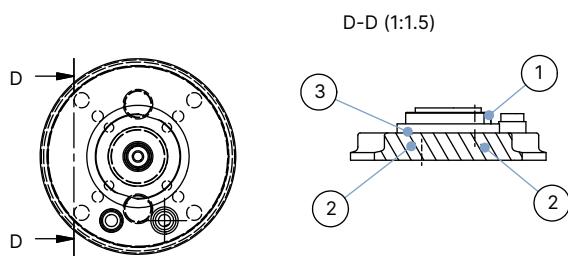

No.	Quantity	Element	Material
1	1	Press-in socket	Stainless steel 1.4301/304
2	1	Seal	EPDM
3	1	Press-in shell	Stainless steel 1.4301/304

Bottom plate

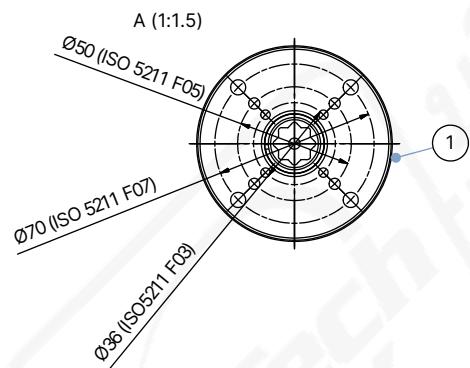


No.	Quantity	Element	Material
1	1	Bottom plate with interface according to ISO 5211	Stainless steel 1.4301/304

5. Dimensions

5.1. Variant P0

Note:


- Dimensions in mm
- Actuators with the additional indication "Control head/Positioner ready" are equipped with an FA03 interface to be combined with ELEMENT control heads and positioners.

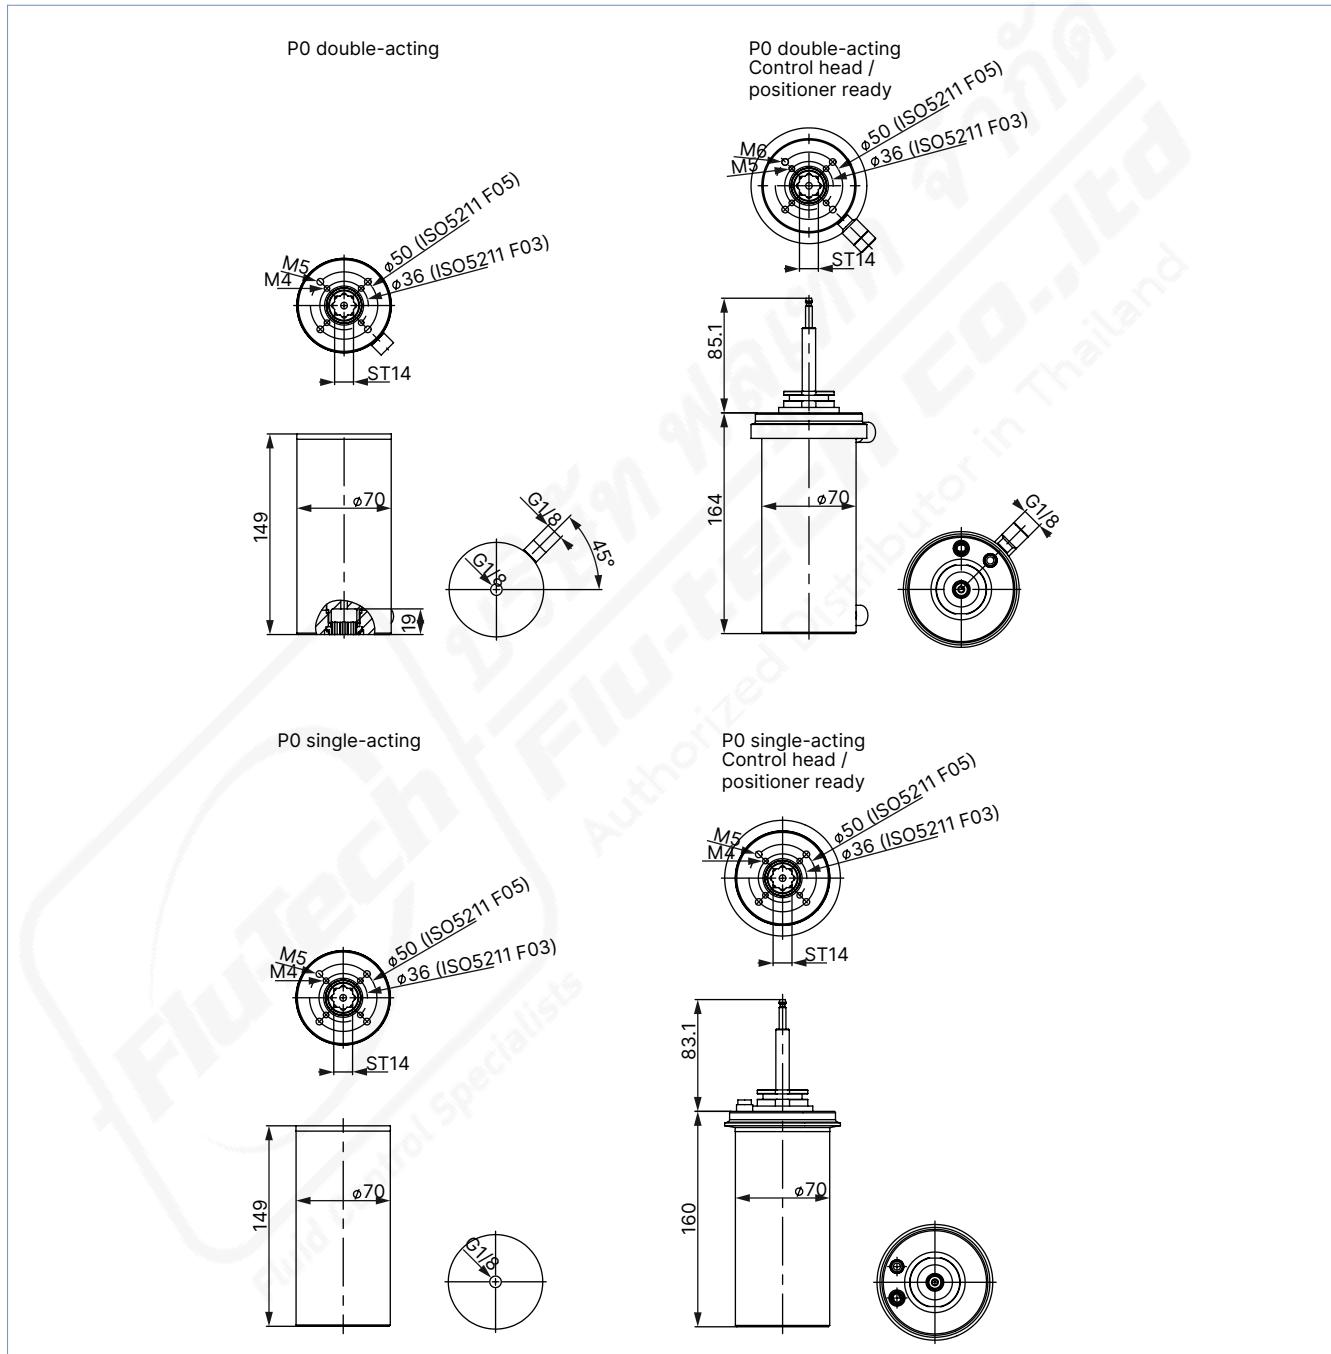

5.2. Variant P1

Note:


- Dimensions in mm
- Actuators with the additional indication "Control head/Positioner ready" are equipped with an FA03 interface to be combined with ELEMENT control heads and positioners.

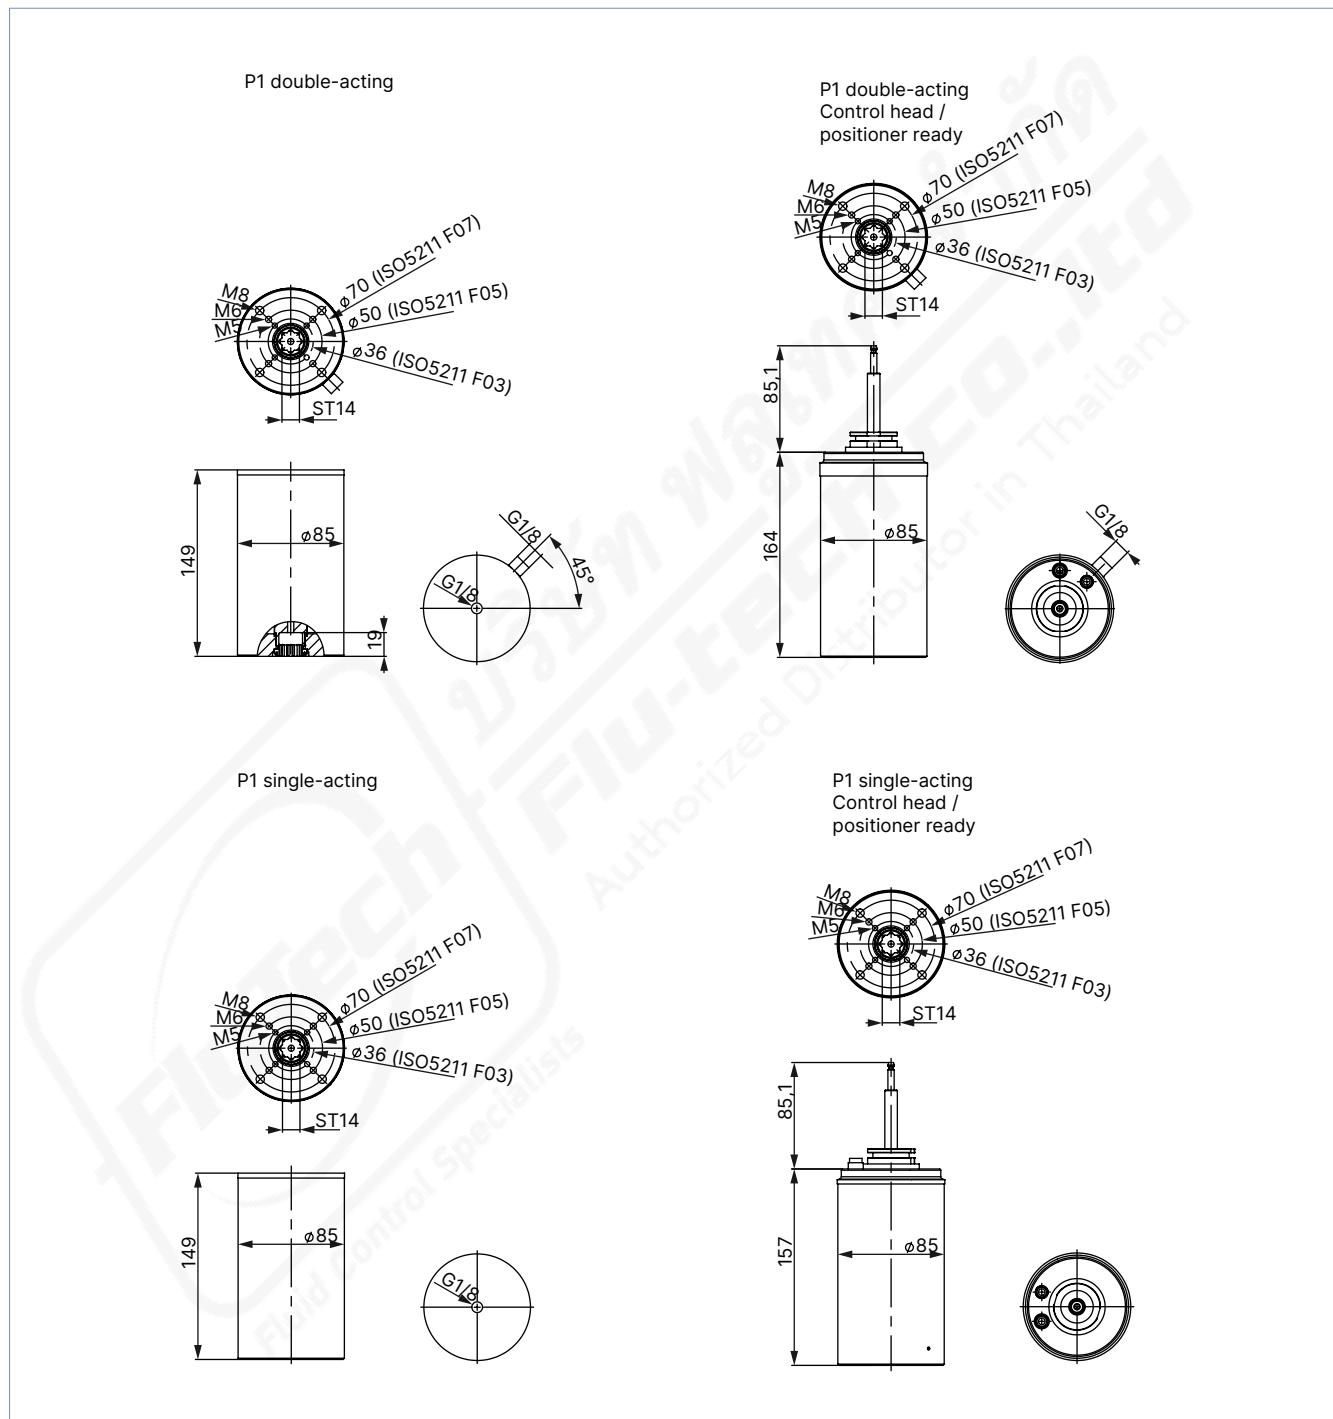

5.3. Variant P2

Note:

- Dimensions in mm
- Actuators with the additional indication "Control head/Positioner ready" are equipped with an FA03 interface to be combined with ELEMENT control heads and positioners.

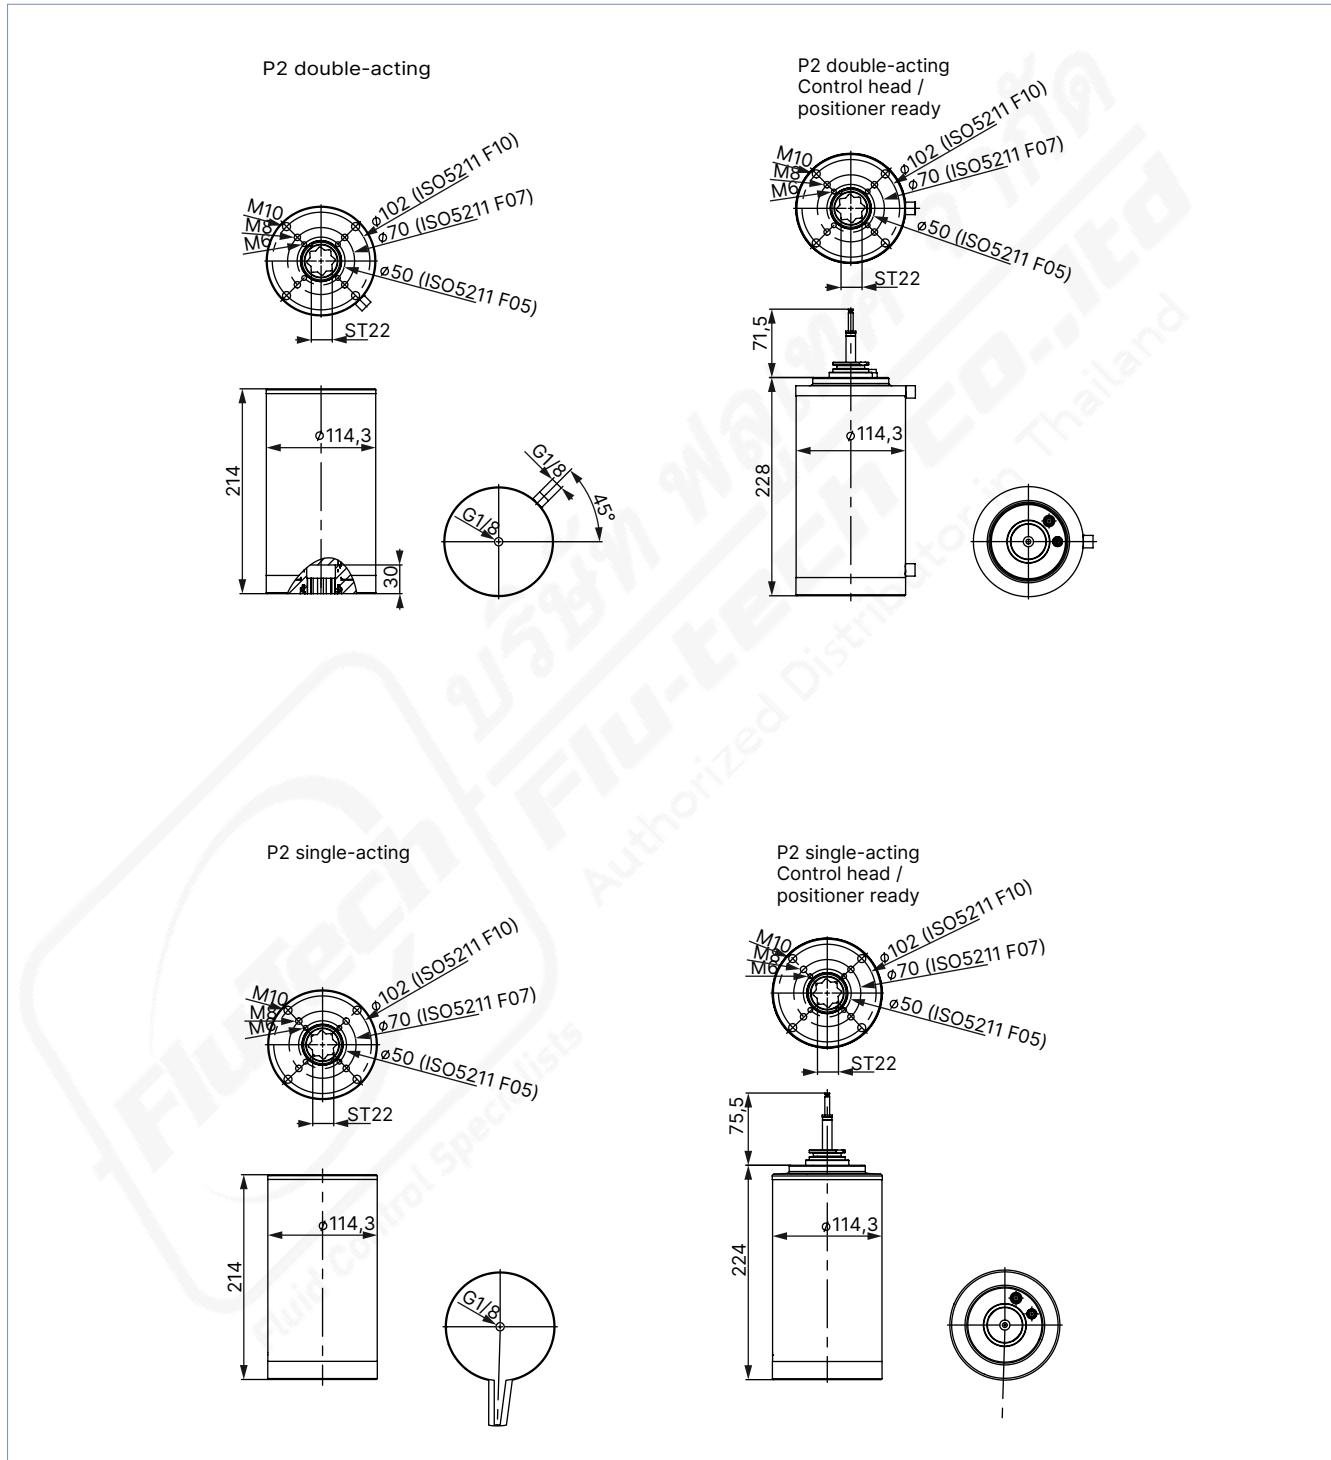

6. Performance specifications

6.1. Torque chart

Single-acting

Note:

Regarding actuator choice, we recommend a safety torque equal to 1.3 times of the valve maximum torque.

Actuator size	Minimum torque for 6 bar pilot pressure ¹⁾ [Nm]
P0	10
P1	28
P2	48

1.) For the balanced operation (ratio of the spring torque to the torque generated by compressed air), the actuator has to be operated with 6 bar compressed air. Lower pilot pressures reduce the torque.

Double-acting

Note:

Regarding actuator choice, we recommend a safety torque equal to 1.3 times of the valve maximum torque.

Actuator size	Torque (depending on the pilot pressure)			
	3 bar [Nm]	4 bar [Nm]	5 bar [Nm]	6 bar [Nm]
P0	17	21	26	32
P1	26	36	44	50
P2	60	80	90	95

6.2. Air consumption

Actuator size	Control function	Pilot pressure [bar]	Air consumption [l/stroke]
P0	Double-acting	3...8	0.5...1.2
P1			0.8...2.0
P2			1.9...5.0
P0	Single-acting	4.8...8	0.8...1.2
P1			1.2...2.0
P2			3.0...5.0

7. Product operation

7.1. Functional overview

Function	Description
	<ul style="list-style-type: none"> The linear lifting motion of the drive piston is redirected in a 90° rotational movement of the drive shaft. The return to the initial position of the single-acting actuators is caused by spring force. For the double-acting actuators, the movement in both directions is caused by compressed air. <p>Note for actuator size P2 in combination with Bürkert control units:</p> <ul style="list-style-type: none"> Position feedback „open”: already at 75° opening angle Control range: 0...75° opening angle

8. Networking and combination with other Burkert products

Note:

The actuator of Type 2053 is perfectly suited for the combined use with ELEMENT control heads resp. positioners (Type 8691/8692/8693/8694) as well as quarter-turn valves like ball valves (Type 2651/2654/2657) and butterfly valves (Type 2671/2674). The described combination is named Type 8805.

Example:



9. Ordering information

9.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

9.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

9.3. Ordering chart

Double-acting, control head/positioner ready

Note:

- For all assemblies of actuator Type 2053 with control unit Type 8691/8692/8693/8694, you need the form seal for control units. The article number can be found in chapter ["9.4. Ordering chart accessories" on page 12](#).
- Actuators with the additional indication "Control head/Positioner ready" are equipped with an FA03 interface to be combined with ELEMENT control head and positioners.

Actuator size	Interface according to ISO 5211	Double square [mm]	Weight [kg]	Article no.
P0	F03/05	14	2.15	369736 
P1	F03/05/07	14	2.95	369740 
P2	F05/07/10	22	6.65	369744 

Double-acting

These actuators **cannot** be combined with the ELEMENT control heads and positioners.

Actuator size	Interface according to ISO 5211	Double square [mm]	Weight [kg]	Article no.
P0	F03/05	14	1.9	369734 
P1	F03/05/07	14	2.7	369738 
P2	F05/07/10	22	6.3	369742 

Single-acting, control head/positioner ready
Note:

- For all assemblies of actuator Type 2053 with control unit Type 8691/8692/8693/8694, you need the form seal for control units. The article number can be found in chapter "[9.4. Ordering chart accessories](#)" on page [12](#).
- Actuators with the additional indication "Control head/Positioner ready" are equipped with an FA03 interface to be combined with ELEMENT control heads and positioners.

Actuator size	Interface according to ISO 5211	Double square [mm]	Weight [kg]	Article no.
P0	F03/05	14	2.2	369735 Ⓜ
P1	F03/05/07	14	3	369739 Ⓜ
P2	F05/07/10	22	6.7	369743 Ⓜ

Single-acting

These actuators **cannot** be combined with the ELEMENT positioners.

Actuator size	Interface according to ISO 5211	Double square [mm]	Weight [kg]	Article no.
P0	F03/05	14	1.95	369733 Ⓜ
P1	F03/05/07	14	2.75	369737 Ⓜ
P2	F05/07/10	22	6.4	369741 Ⓜ

9.4. Ordering chart accessories
Form seal for control units of Type 8691/8692/8693/8694
Note:

For all assemblies of actuator Type 2053 with control unit Type 8691/8692/8693/8694, you need the form seal for control units.

Description	Article no.
Form seal for control units of Type 8691/8692/8693/8694	60014507 Ⓜ

Angled connector

Description	Article no.
Angled push-in fitting G 1/8. nickel-plated brass	780082 Ⓜ

Silencer

Description	Article no.
Silencer G 1/8	780779 Ⓜ

Reducing sleeves

Description	Article no.
Reducing sleeve double square/square 14/9 mm	665288 ₪
Reducing sleeve double square/square 14/11 mm	665289 ₪
Reducing sleeve square/square 17/14 mm	665290 ₪
Reducing sleeve double square/square 17/14 mm	773348 ₪
Reducing sleeve double square/square 17/11 mm	773343 ₪
Reducing sleeve square/square 22/19 mm	773836 ₪
Reducing sleeve double square/square 22/17 mm	684858 ₪
Reducing sleeve double square/double square 22/14 mm	666684 ₪
Reducing sleeve double square/square 22/11 mm	773344 ₪
Reducing sleeve double square/square 27/22 mm	774594 ₪
Reducing sleeve square/square 27/19 mm	774279 ₪
Reducing sleeve square/square 27/17 mm	774193 ₪