

Full-Size SERIES 380 Modular General Purpose Regulators

R380 Models Port Sizes: 3/8, 1/2, 3/4

Available Color Caps



Yellow
(optional)



Red
(optional)



Blue
(optional)



Grey
(standard)



Model Shown: R380-6G

- ◆ Modular or inline mounting. Modular mounting allows regulators to be positioned at increments of 45° for ease in adjustment.
- ◆ Self-relieving diaphragm design; large diaphragm sensing ratio; non-relieving optional.
- ◆ Pressure gauge.
- ◆ Pressure adjustment locking key; tamper-resistant pressure setting.
- ◆ NPTF port threads; optional BSPP threads.

SPECIFICATIONS

Ambient/Media Temperature:

40° to 175°F (4° to 79°C).

Body: Zinc.

Dome:

Nylon; aluminum with optional 0-175 psig spring.

Cap Color: Grey. Yellow, red, and blue optional.

Fluid Media: Compressed air.

Inlet Pressure: 300 psig (21 bar) maximum.

Knob: Acetal

Outlet Pressure: Adjustable up to 125 psig (8.6 bar); optional adjusting springs.

Pressure Adjustment Locking Key: Removable.

Pressure Gauge: 0 to 200 psig (14 bar); 1/4 NPT gauge ports front and rear.

Panel Mounting: 2-1/16 inch (52 mm) hole required.


Seals: Nitrile.

Self-relieving: Non-relieving optional.

Valve: Brass.

Valve Cap: Nylon.

FLOW CHARTS

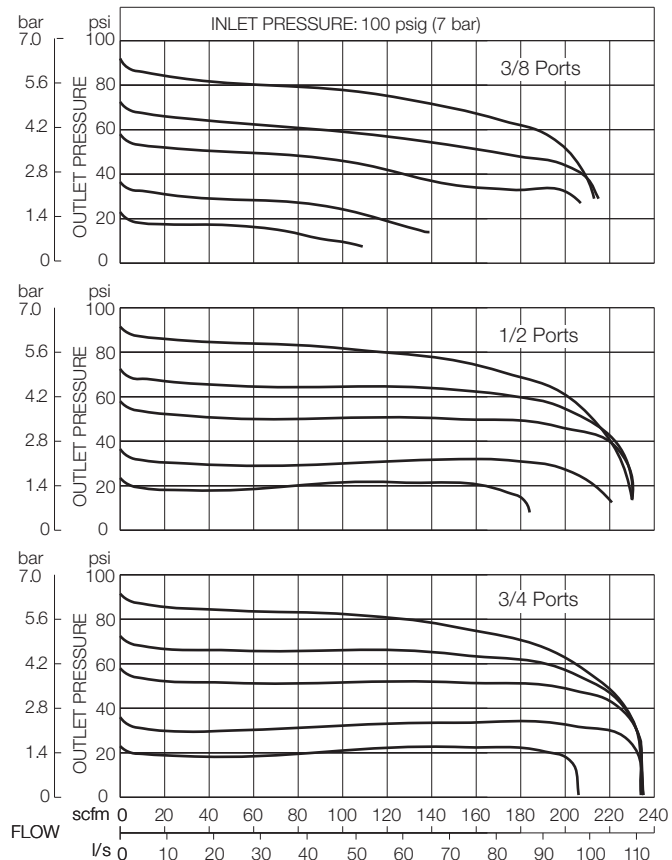

บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270

845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND

Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th


DIMENSIONS inches (mm)

				Weight †
A	B *	C **	Depth †	lb (kg)
3.5 (87)	5.6 (142)	1.6 (40)	2.9 (73)	2.56 (1.16)

* Dome removal clearance: add 0.625 (16).

** Cap removal clearance: add 0.50 (13).

† Less gauge.

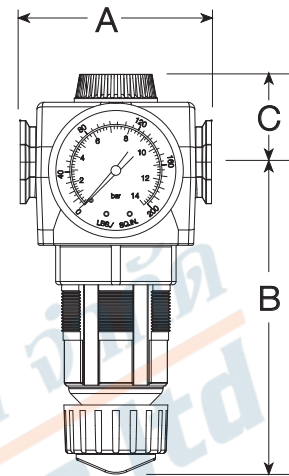

ORDERING INFORMATION

Change the letters in the sample model number below to specify the regulator you want.

R380 - 3 Y G W

PORT SIZE

3/8 NPTF	3
1/2 NPTF	4
3/4 NPTF	6

OPTIONS (More than one option can be chosen. Add in alphabetical order)

None	Leave Blank
Non-relieving	A
Cap color: Grey is standard.	

Yellow	C1
Red	C2
Blue	C3

Internal bypass - reverse flow E

Springs: (0-125 psig standard)

For optimum performance operating pressure should fall approximately in the middle of the spring range.

0-175 psig (0-12 bar)	H**
0-50 psig (0-3.4 bar)	L
0-20 psig (0-1.4 bar)	L20

Metal Dome
 MD |

Limit maximum psig setting
 M* |

Tee handle
 T |

* Insert maximum limited pressure.

** H option spring includes metal dome.

PORT TYPE

NPTF threads	Leave Blank
BSPF threads	W

OPTIONS (More than one option can be chosen. Add in alphabetical order)

None	Leave Blank
0-200 psig Gauge	G
Mounting nut	P

MOUNTING BRACKETS

See page 356.



บริษัท ฟลูเทค จำกัด
FLU-TECH CO.,LTD

845/3-4 หมู่ 3 ถ.เทพารักษ์ ต.เทพารักษ์ อ.เมือง จ.สมุทรปราการ 10270

845/3-4 Thepharak RD., T.Thepharak, A.Muang, Samutprakarn 10270 THAILAND

Tel. 0 2384 6060, Fax 0 2384 5701, Email : sales@flutech.co.th, www.flutech.co.th