



### Magnetic inductive sensor without flange (wafer connection)

- For connection to a transmitter Type SE58 (with or without display, in compact or remote variant) for flow measurement
- Design mainly for use in applications with water
- Flow measurement 25...approx. 75.000 l/min for DN 25...DN 400

Product variants described in the data sheet may differ from the product presentation and description.

#### Can be combined with



**Type SE58** ▶  
L variant of the transmitter for electromagnetic-inductive flow sensors



**Type SE58** ▶  
M variant of the transmitter for electromagnetic-inductive flow sensors



**Type SE58** ▶  
S variant of the transmitter for electromagnetic-inductive flow sensors

#### Type description

The Type S054 magnetically inductive flow sensor (compact or remote version) is suitable for liquids with a minimum conductivity and for use in applications with requirements in areas of water measurements.

The combination with the dedicated Type SE58 S transmitter (minimum required conductivity: 20  $\mu\text{S}/\text{cm}$ ) or with the Type SE58 M or Type SE58 L transmitters (minimum conductivity required: 5  $\mu\text{S}/\text{cm}$ ) results in a flowmeter with different performance, functions, materials and approvals, with the corresponding suitability for the respective applications depending on the respective requirements.


With the Type SE58 S you get a compact device, with the Type SE58 M and Type SE58 L compact devices or remote versions are created for which the transmitter and sensor are connected by 2 cables up to a maximum length. Standard process connections available for the Type S054 are wafer connections.



## Table of contents

<b>1. General technical data</b>	<b>3</b>
<b>2. Approvals and conformities</b>	<b>5</b>
2.1. Conformity .....	5
2.2. Standards.....	5
<b>3. Materials</b>	<b>5</b>
3.1. Bürkert resistApp .....	5
<b>4. Dimensions</b>	<b>5</b>
4.1. Compact variant.....	5
4.2. Remote variant with junction box .....	6
<b>5. Product installation</b>	<b>6</b>
5.1. Installation notes .....	6
Flow measurement.....	6
5.2. Selection of the nominal diameter .....	7
<b>6. Product operation</b>	<b>7</b>
6.1. Measuring principle.....	7
<b>7. Ordering information</b>	<b>8</b>
7.1. Bürkert eShop .....	8
7.2. Recommendation regarding product selection.....	8
7.3. Bürkert product filter.....	8
7.4. Ordering chart .....	8
7.5. Ordering chart accessories.....	9

DTS 1000471658 EN Version: B Status: RL (released | freigegeben | valide) printed: 02.02.2024

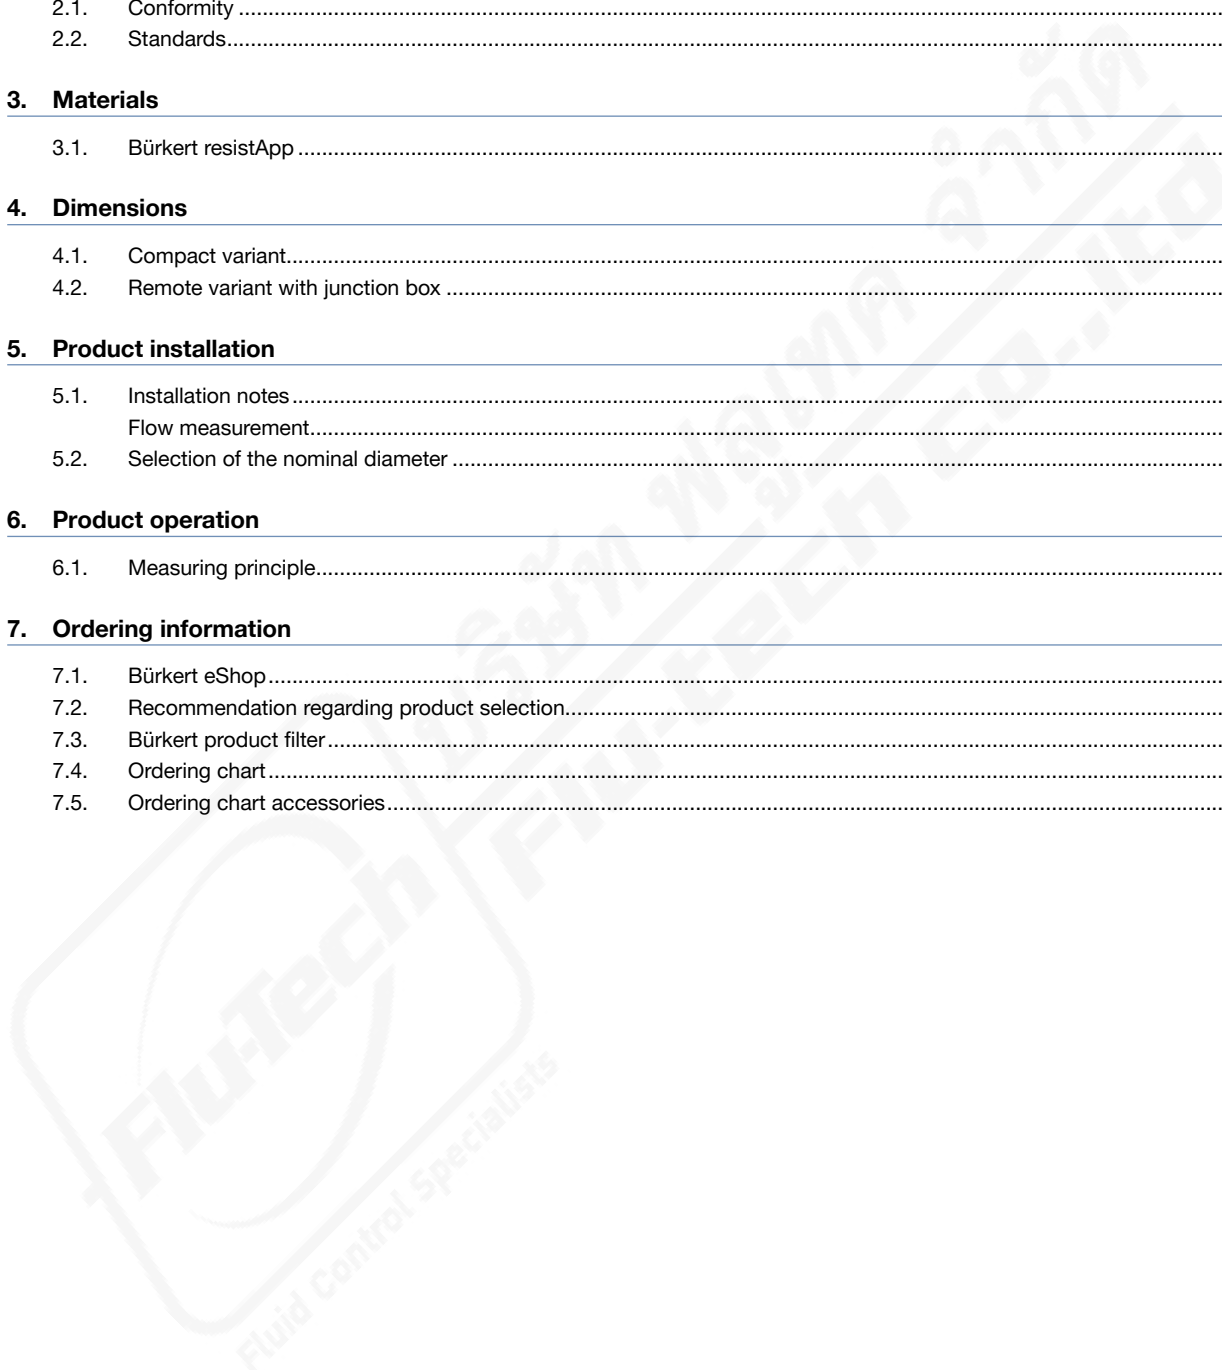

## 1. General technical data

The electromagnetic flow sensor Type S054 in a compact or remote variant is intended for use with transmitter Type SE58, which is available in three variants L, M or S.



Further information can be found in the data sheet of the transmitter, see [data sheet Type SE58](#) ▶.

### Product properties

<b>Material</b>	
<b>Non wetted parts</b>	
Sensor housing	Carbon steel painted (stainless steel 304 or 316 on request)
Junction box	Only for remote sensor: painted aluminium (on request: stainless steel 304 (1.4301) raw or polished)
<b>Wetted parts</b>	
Lining	PP or ebonite (hard rubber) (PTFE on request)
Electrode	Stainless steel 316L (Alloy C, Titanium, Tantalum, Platinum-rhodium on request)
Seal	<ul style="list-style-type: none"> <li>• FKM (EPDM on request) with PP lining</li> <li>• Without gasket with ebonite (hard rubber) lining (with PTFE lining on request)</li> </ul>
Pipe diameter	DN 25...DN 200 (upper DN on request)
Dimensions	Further information can be found in chapter <a href="#">“4. Dimensions” on page 5.</a>
Measuring principle	Electromagnetic induction Further information can be found in chapter <a href="#">“6.1. Measuring principle” on page 7.</a>
Measuring range	0...0.72 m³/h to 0...1130 m³/h (upper on request) Further information can be found in chapter <a href="#">“7.4. Ordering chart” on page 8.</a>

### Performance data

At reference conditions and according to internal test procedures:	
<ul style="list-style-type: none"> <li>• At room temperature</li> <li>• Constant flow rate during the test, liquid speed &gt; 1 m/s</li> <li>• Pressure: &gt;30 Kpa</li> <li>• Flow condition: observed inlet and outlet conditions</li> <li>• Zero point stability: ±0.005 %</li> </ul>	
Measurement deviation	If used with Type SE58 transmitter: <ul style="list-style-type: none"> <li>• in compact or remote L variant: ≤ ±0.2 % of the measured value for flow velocity &gt;0.5 m/s</li> <li>• in compact or remote M variant: ≤ ±0.8 % of the measured value for flow velocity &gt;0.5 m/s</li> <li>• in compact S variant: ≤ ±0.5 % of the measured value for flow velocity &gt;0.5 m/s</li> </ul> See <a href="#">data sheet Type SE58</a> ▶
Repeatability	If used with Type SE58 transmitter: <ul style="list-style-type: none"> <li>• in compact or remote L variant: ≤ ±0.1 % of the measured value for flow velocity &gt;0.5 m/s</li> <li>• in compact or remote M variant: ≤ ±0.4 % of the measured value for flow velocity &gt;0.5 m/s</li> <li>• in compact S variant: ≤ ±0.25 % of the measured value for flow velocity &gt;0.5 m/s</li> </ul> See <a href="#">data sheet Type SE58</a> ▶
Vacuum resistance	200 mbar (2.9 PSI) absolute at 100 °C (212 °F) for PTFE, at 60 °C (140 °F) for PP and at 80 °C (176 °F) for ebonite

DTS 1000471658 EN Version: B Status: RL (released | freigegeben | valide) printed: 02.02.2024

Medium data	
Fluid temperature	<ul style="list-style-type: none"> <li>• With PP lining, if used with Type SE58 transmitter:                             <ul style="list-style-type: none"> <li>– in compact variant: -0...+60 °C (+32...+140 °F)</li> <li>– in remote variant: -0...+60 °C (+32...+140 °F)</li> </ul> </li> <li>• With ebonite lining, if used with Type SE58 transmitter:                             <ul style="list-style-type: none"> <li>– in compact variant: -5...+80 °C (+23...+176 °F)</li> <li>– in remote variant: -5...+80 °C (+23...+176 °F)</li> </ul> </li> <li>• With PTFE lining (on request), if used with Type SE58 transmitter:                             <ul style="list-style-type: none"> <li>– in compact variant: -20...+100 °C (-4...+212 °F)</li> <li>– in remote variant: -20...+110 °C (-4...+230 °F)</li> </ul> </li> </ul>
Fluid pressure	<ul style="list-style-type: none"> <li>• PN 16 (232 PSI) with PP or ebonite lining</li> <li>• PN 40 on request, only with PTFE lining up to DN 150</li> </ul>
Minimum conductivity	5 µS/cm (or 20 µS/cm with demineralised water)
Process/Pipe connection & communication	
Pipe connection	Wafer
Electrical connection	2 cable glands PG9 (for remote variant of the sensor)
Approvals and conformities	
<b>Directives</b>	
CE directive	Further information on the CE directive can be found in chapter <b>“2.2. Standards”</b> on page 5.
Pressure equipment directive	<p>The device is subject to the requirements of the Pressure Equipment Directive 2014/68/EU. Category II device for group 1 and 2 fluids under the following conditions:</p> <ul style="list-style-type: none"> <li>• maximum allowable pressure (PS) ≤ 40 bar</li> <li>• minimum/maximum temperature (TS): -10/+130 °C</li> <li>• within the following limits for liquids of group 2:                             <ul style="list-style-type: none"> <li>– PN 10 for DN 400...DN 500</li> <li>– PN 16 for DN 250...DN 300</li> <li>– PN 25 for DN 200...DN 250</li> <li>– PN 40 for DN 40...DN 250</li> </ul> </li> <li>• within the following limits for liquids of group 1 with a vapour pressure at the maximum allowable temperature not exceeding 0.5 bar (g): for diameters above DN 25 and PS x DN &gt; 2000</li> </ul>
Environment and installation	
Ambient temperature	According to the used variant of Type SE58 transmitter and its material Further information can be found in the data sheet of the transmitter, see <b>data sheet Type SE58</b> ▶.
Relative air humidity	≤ 90 %, without condensation
Height above sea level	Max. 2000 m
Operating condition	Continuous
Equipment mobility	Fixed
Application range	Indoor and outdoor Protect the device against electromagnetic interference, ultraviolet rays and against the effects of climatic conditions.
Degree of protection according to IEC/EN 60529	<p>If use with transmitter Type SE58:</p> <ul style="list-style-type: none"> <li>• in compact L and M variant: IP67 (IP68 optional)</li> <li>• in compact S variant: IP67 (IP68 optional)</li> <li>• in remote L and M variant: IP68</li> </ul>
Installation category	Category II according to UL/EN 61010-1
Pollution degree	Degree 2 according to UL/EN 61010-1

DTS 1000471658 EN Version: B Status: RL (released | freigegeben | valide) printed: 02.02.2024

## 2. Approvals and conformities

### 2.1. Conformity


In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

### 2.2. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

## 3. Materials

### 3.1. Bürkert resistApp

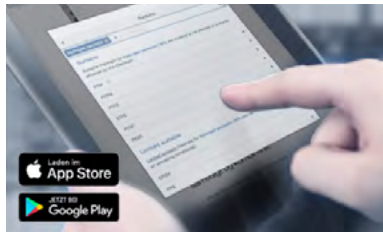

#### Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.


[Start chemical resistance check](#)

## 4. Dimensions

### 4.1. Compact variant

**Note:**

- Further information on the dimensions of the Type SE58 transmitter can be found in **data sheet Type SE58** ▶.
- Dimensions in mm, unless otherwise stated

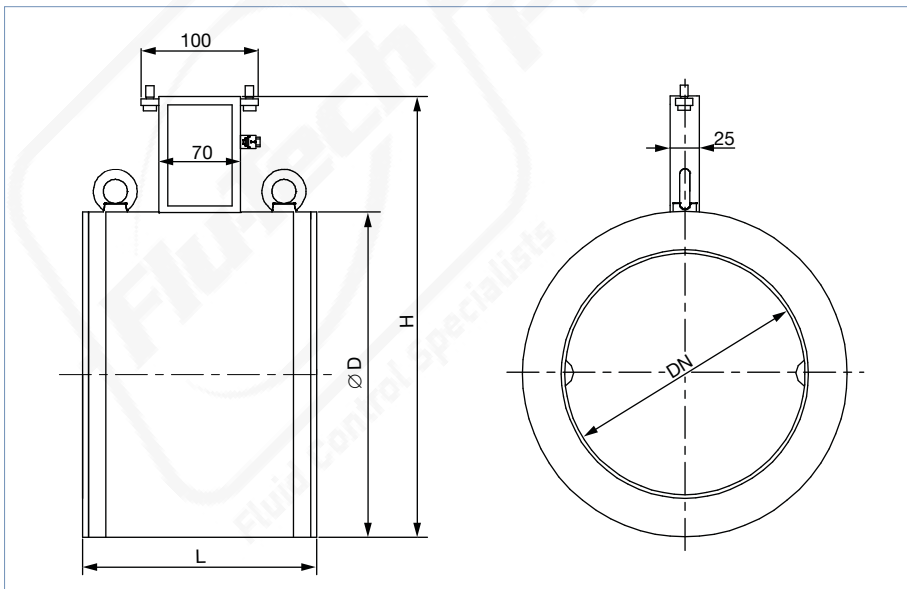


DN	H	L <sup>1.)</sup>	ØD
25	147	100	56
32	153	100	62
40	161	100	70
50	177	100	86
65	199	150	108
80	209	150	118
100	235	150	144
125	263	180	172
150	291	180	200
200	362	200	271

1.) tolerance +0/-3 mm

#### 4.2. Remote variant with junction box

**Note:**

- Further information on the dimensions of the Type SE58 transmitter can be found in **data sheet Type SE58** ▶.
- Dimensions in mm, unless otherwise stated

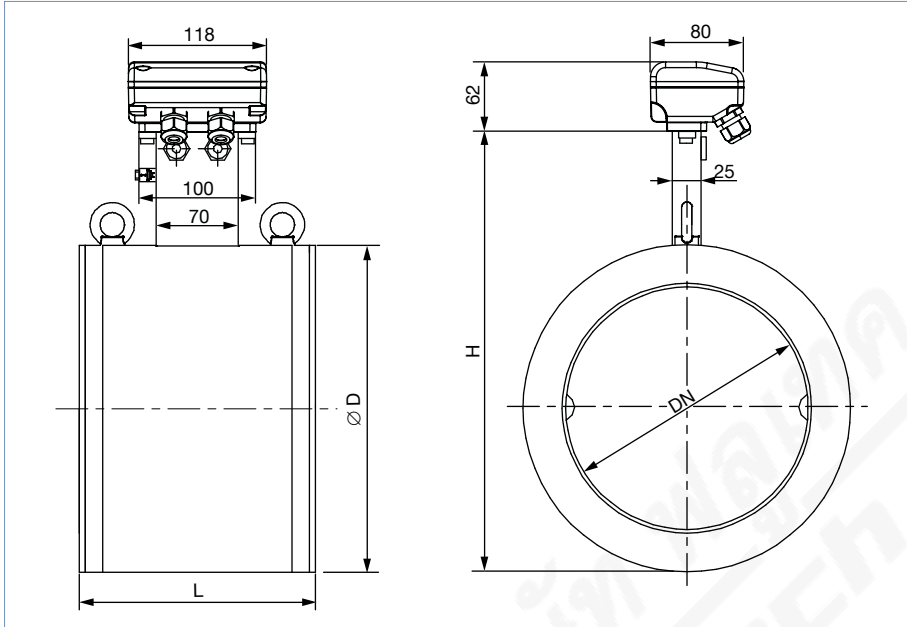

DN	H	L <sup>1.)</sup>	ØD
25	147	100	56
32	153	100	62
40	161	100	70
50	177	100	86
65	199	150	108
80	209	150	118
100	235	150	144
125	263	180	172
150	291	180	200
200	362	200	271

1.) Tolerance +0/-3 mm

### 5. Product installation


#### 5.1. Installation notes

**Flow measurement**

**Note:**


The device is not suitable for use in gaseous media and steam.

Minimum straight distances upstream and downstream of the sensor must be observed.



The device can be installed in either horizontal or vertical pipes, but following additional conditions should be respected:

- The pipe always has to be filled with fluid at all times near the device, when it is in operation.
- Mount the sensor in the indicated positions shown below to obtain an accurate flow measurement.

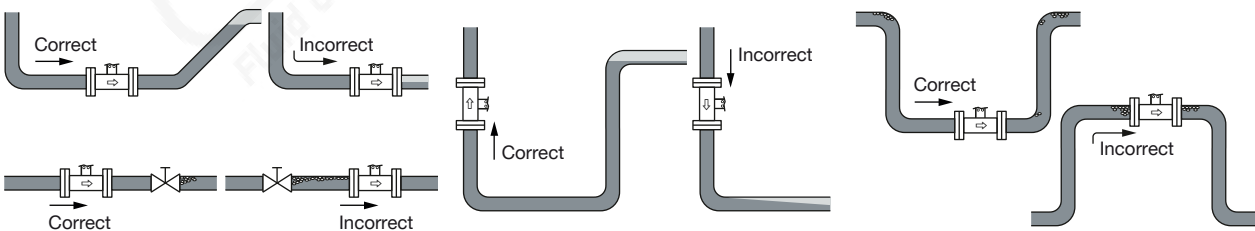

The suitable pipe size is selected using the diagram in the chapter "5.2. Selection of the nominal diameter" on page 7.




### 5.2. Selection of the nominal diameter

The following graph is used to determine the appropriate DN of the pipe and fitting for the application, according to the fluid velocity and the flow rate. On the chart, the intersection of flow velocity and flow rate gives the appropriate diameter.

**Example:**

- Nominal flow: 100 l/min
  - Optimal flow rate: 2...3 m/s
- Result: Select a pipe size of DN 32

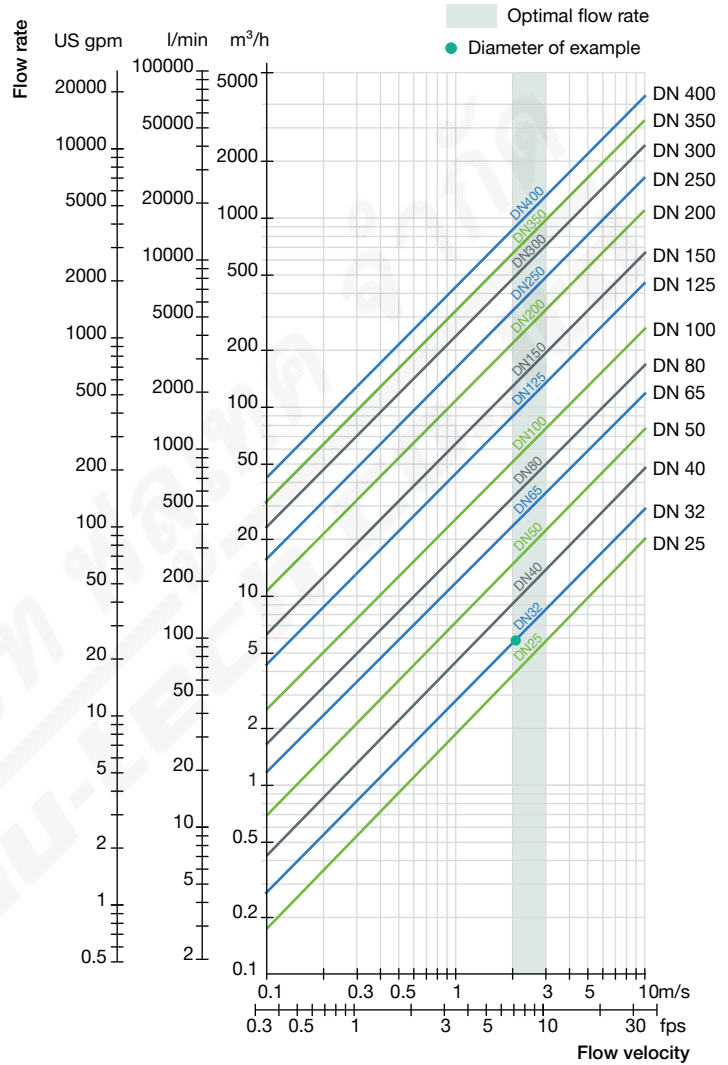

## 6. Product operation

### 6.1. Measuring principle

Faraday's law serves as the physical basis for magnetic flow measurement.

Magnetic coils are arranged around the pipeline to generate a magnetic field. Conductive liquids flowing through the magnetic field induce a voltage at two opposite metallic electrodes in contact with the medium. These electrodes are used to measure the induced electrical alternating voltage.


The signal of sensor Type S054 must be amplified and processed by transmitter Type SE58.

Further information can be found in the data sheet of the transmitter, see [data sheet Type SE58](#) ▶.

DTS 1000471658 EN Version: B Status: RL (released | freigegeben | valide) printed: 02.02.2024

## 7. Ordering information

### 7.1. Bürkert eShop



**Bürkert eShop – Easy ordering and quick delivery**

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

### 7.2. Recommendation regarding product selection


A complete flowmeter consists of a Type S054 (compact or remote variant) and a Type SE58 transmitter (compact or remote variant).

See [data sheet Type SE58](#) ▶ for more information.

Two different components must be ordered in order to select a complete device. The following information is required:

- **Article no.** of the sensor **Type S054** (see [“7.4. Ordering chart” on page 8](#))
- **Article no.** of the transmitter **Type SE58** (see [data sheet Type SE58](#) ▶ for more information)

### 7.3. Bürkert product filter



**Bürkert product filter – Get quickly to the right product**

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.




[Try out our product filter](#)

### 7.4. Ordering chart

DN [mm]	Flow rate range		Pipe connection	Material				Article no.
	Min. 0...0.4 m/s	Max. 0...10 m/s		Housing	Electrode <sup>1.)</sup>	Seal	Lining	
<b>Sensor Type S054, compact variant</b>								
25	0...0.72 m³/h	0...18 m³/h	Wafer type	Carbon steel	Stainless steel 316L	FKM	PP	554532
32	0...1.16 m³/h	0...29 m³/h						559435
40	0...1.80 m³/h	0...45 m³/h						554101
50	0...2.88 m³/h	0...72 m³/h						554700
65	0...4.80 m³/h	0...120 m³/h						559436
80	0...7.20 m³/h	0...180 m³/h						554142
100	0...11.20 m³/h	0...280 m³/h						554342
125	0...18.00 m³/h	0...450 m³/h						562953
150	0...25.60 m³/h	0...640 m³/h	562954					
200	0...45.20 m³/h	0...1130 m³/h	Wafer type	Carbon steel	Stainless steel 316L	-	Ebonite (hard rubber)	561912



1.) 3 electrodes (2 measuring electrodes + 1 ground electrode)



Further variants on request	
 <b>Material</b> <ul style="list-style-type: none"> <li>• Seal: EPDM</li> <li>• Lining: PTFE</li> <li>• Junction box: stainless steel 304 (1.4301) raw or polished</li> <li>• Body: stainless steel 304, stainless steel 316L</li> <li>• Electrodes:                             <ul style="list-style-type: none"> <li>– Alloy C (2 measuring electrodes + 2 ground electrodes)</li> <li>– Titanium (2 measuring electrodes + 2 ground electrodes)</li> <li>– Tantalum (2 measuring electrodes + 2 ground electrodes)</li> <li>– Platinum-rhodium (2 measuring electrodes + 2 ground electrodes)</li> </ul> </li> </ul>	 <b>Orifice</b> DN > 200 <sup>1.)</sup>   <b>Pressure</b> PN 10, PN 25, PN 40

1.) Ebonite (hard rubber) or PTFE lining material (if PTFE not selected then ebonite as standard)

### 7.5. Ordering chart accessories

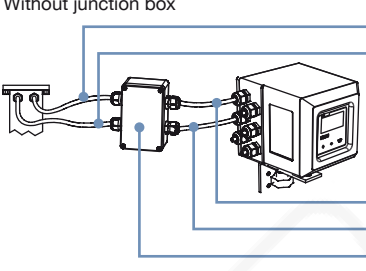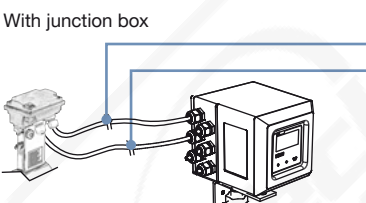Accessories for remote sensor	No.	Description	Article no.
 <p>Without junction box</p>	1	10 m cable for electrodes <sup>1.)</sup> For connecting the sensor ( <b>variant without junction box</b> ) Type S051, S054, S055 or S056 to the connecting box of the extension cable set	448518
	2	10 m cable for coils <sup>1.)</sup> For connecting the sensor ( <b>variant without junction box</b> ) Type S051, S054, S055 or S056 to the connecting box of the extension cable set	448519
	3	10 m cable for electrodes <sup>1.)</sup> For connecting <ul style="list-style-type: none"> <li>• the connecting box of the extension cable set to the transmitter Type SE58</li> <li>• the sensor (<b>variant with junction box</b>) Type S051, S054, S055 or S056 to the transmitter Type SE58</li> </ul>	562851
	4	10 m cable for coils <sup>1.)</sup> For connecting <ul style="list-style-type: none"> <li>• the connecting box of the extension cable set to the transmitter Type SE58</li> <li>• the sensor (<b>variant with junction box</b>) Type S051, S054, S055 or S056 to the transmitter Type SE58</li> </ul>	562852
	5	Connecting box of the extension cable set including resin	562853
 <p>With junction box</p>			

1.) Cable lengths other than 10 m on request (for cables length >20 m, a preamplifier is supplied for an additional charge).

DTS 1000471658 EN Version: B Status: RL (released | freigegeben | valide) printed: 02.02.2024