



Pneumatically operated 2/2-way angle seat valve CLASSIC

- Stainless steel or gunmetal housing with threaded, clamped or welded connection
- Long service life
- High flow rate
- Robust actuators with modular accessory program



Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 8644 AirLINE SP electropneumatic automation system	▶
	Type 8640 Modular valve island for pneumatics	▶
	Type 8697 Pneumatic control unit for decentralised automation of process valves ELEMENT	▶
	Type 7012 Direct-acting 3/2-way plunger valve	▶
	Type 6014 Plunger valve 3/2-way direct-acting	▶
	Type 8840 Modular process valve cluster – distributor and collector	▶

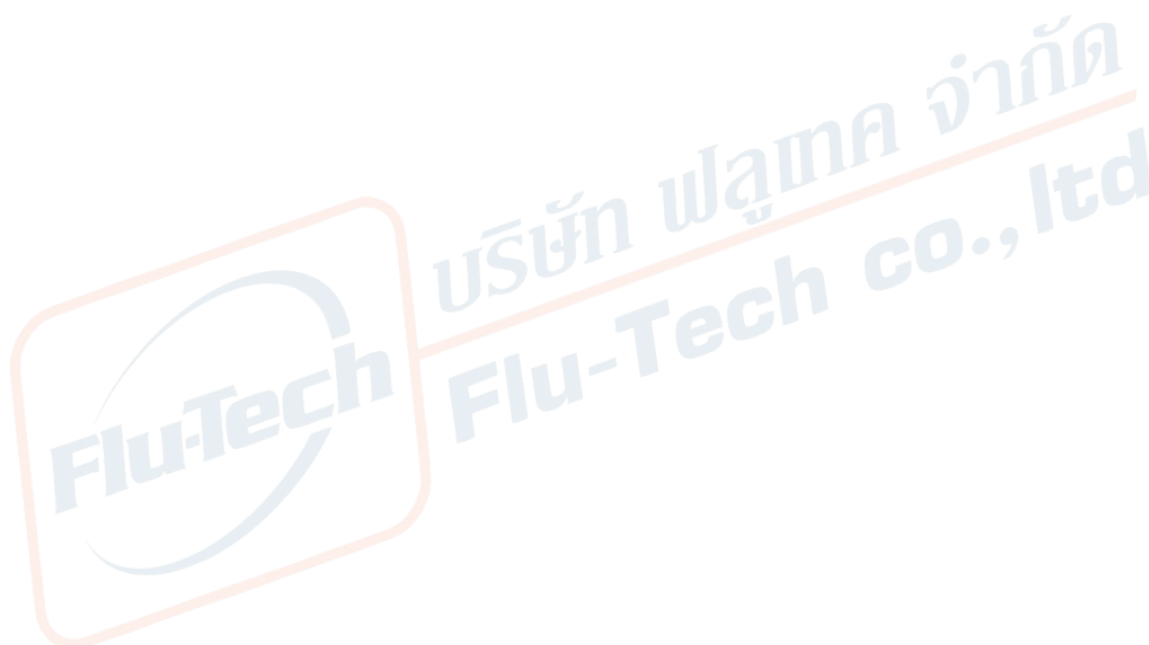
Type description

The externally piloted angle seat valve is operated with a single or double-acting piston actuator. The actuator is available in two different materials, depending on the ambient temperature. High flow rates are attained with the virtually straight flow path. The reliable self-adjusting packing gland provides high sealing integrity. These maintenance-free and robust valves can be retrofitted with a comprehensive range of accessories for position indication, stroke limitation or manual override.

Table of contents

1. General technical data	4
2. Product variants	5
2.1. Gunmetal body with PA actuator	5
2.2. Stainless steel body with PA actuator.....	5
2.3. Stainless steel body with PPS actuator	5
3. Control functions	6
4. Approvals and conformities	7
4.1. General notes	7
4.2. Conformity	7
4.3. Standards	7
4.4. Explosion protection.....	7
4.5. Drinking water	7
4.6. Foods and beverages/Hygiene	8
4.7. Others	8
DNV GL classification.....	8
Oxygen	8
Fuel gases	8
TA Luft.....	8
5. Materials	9
5.1. Bürkert resistApp	9
5.2. Material specifications	9
6. Dimensions	10
6.1. Actuator	10
Angle seat valve Type 2000 and valve system on/off CLASSIC Type 8801-YA	10
6.2. Body with threaded connection.....	11
6.3. Body with welded connection	12
6.4. Body with clamp connection	13
7. Performance specifications	14
7.1. Fluidic data.....	14
Overview of fluidic data for flow below seat (for liquids, steam and gases)	14
Pilot pressure diagrams with flow direction below seat (control function B, seat seal PTFE)	18
Overview of fluidic data with flow above seat (for gases and steam)	19
Pilot pressure diagram with flow direction above seat (control function A, seat seal PTFE)	20
7.2. Operating limits	21
Operating limits for medium temperature and operating pressure	21
Operating limits for ambient and medium temperature.....	22
Operating limits for optional variants	22
8. Product accessories	23
9. Networking and combination with other Bürkert products	24

10. Ordering information	25
10.1. Bürkert eShop	25
10.2. Bürkert product filter	25
10.3. Bürkert Product Enquiry Form	25
10.4. Ordering chart threaded connection	26
Valve with flow direction below seat.....	26
Valve with flow direction above seat.....	27
10.5. Ordering chart welded connection.....	28
Valve with flow direction below seat.....	28
Valve with flow direction above seat.....	29
10.6. Ordering chart clamp connection.....	30
Valve with flow direction below seat.....	30
Valve with flow direction above seat.....	31
10.7. Ordering chart accessories.....	32
Accessories for 3/2-way pilot valves with banjo bolts	32



1. General technical data

Product properties	
Dimensions	Further information can be found in chapter "6. Dimensions" on page 10.
Material	Further information can be found in chapter "5. Materials" on page 9.
Design	Angle seat valve
Nominal diameter (port connection)	DN 10...DN 80, NPS 3/8...NPS 3
Safety setting in case of power failure	Normally closed (control function A), normally open (control function B)
Flow direction	Flow to open (below seat), flow to close (above seat)
Performance data	
Operating pressure	0 bar(g)...25 bar(g), vacuum variants...- 0.9 bar(g) (option) (see "7.1. Fluidic data" on page 14)
Nominal pressure	PN 25 (DIN EN 1333), Class 150 (DIN EN 1759)
Pilot pressure	2...10 bar(g) (see "7.1. Fluidic data" on page 14)
Seat leakage	Leakage rate A (DIN EN 12266 - 1), seat seal PTFE and PEEK, test medium air
K _v value	1.6...140 m³/h (see "7.1. Fluidic data" on page 14)
Medium data	
Operating medium	Steam, water, neutral gases, alcohols, oils, fuels, hydraulic fluids, salt solutions, alkalis, organic solvents, oxygen and fuel gases of families I, II and III in accordance with the Gas Appliances Regulation (EU) 2016/426
Medium temperature	- 40...+ 230 °C (see "7.2. Operating limits" on page 21)
Viscosity	Max. 600 mm²/s
Control medium	Air, neutral gases
Product connections	
Port connection¹⁾	
Threaded connection	G (DIN ISO 228 - 1) NPT (ASME B1.20.1) RC (ISO 7 - 1)
Welded connection	DIN EN ISO 1127 / ISO 4200 / DIN 11866 series B DIN 11850 - 2 / DIN 11866 series A ASME BPE / DIN 11866 series C SMS 3008
Clamp connection	DIN 32676 series B (pipe: ISO 4200) DIN 32676 series A (pipe: DIN 11850 - 2) ASME BPE
Pilot air port	
Actuator size Ø 40 (C)	Thread G 1/8
Actuator size Ø 50 (D)...125 (H)	Thread G 1/4
Approvals and conformities	
Further information can be found in chapter "4. Approvals and conformities" on page 7.	
Material certificate	2.2, 3.1
Environment and installation	
Ambient temperature	- 40...+ 140 °C (see "2. Product variants" on page 5)
Degree of protection	IP67
Installation position	As required, preferably with actuator upright

1.) Others are available on request.

2. Product variants



2.1. Gunmetal body with PA actuator

Product properties

Nominal diameter (port connection) DN 10...DN 65, NPS 3/8...NPS 2 1/2

Performance dataOperating pressure 0...16 bar(g), vacuum up to -0.9 bar(g) (option)
(see "7.1. Fluidic data" on page 14)**Maximum pilot pressure**

Actuator size 40 (C), 50 (D), 63 (E), 80 (F) 10 bar(g)

Actuator size 100, 125 (H) 7 bar(g)

Medium data

Medium temperature -40...+180 °C

Product connection

Port connection Threaded connection

Environment and installation

Ambient temperature -40...+60 °C (see "7.2. Operating limits" on page 21)



2.2. Stainless steel body with PA actuator

Product properties

Nominal diameter (port connection) DN 10...DN 80, NPS 3/8...NPS 3

Performance dataOperating pressure 0...25 bar(g), vacuum up to -0.9 bar(g) (option)
(see "7.1. Fluidic data" on page 14)**Maximum pilot pressure**

Actuator size 40 (C), 50 (D), 63 (E), 80 (F) 10 bar(g)

Actuator size 100 (G), 125 (H) 7 bar(g)

Media data

Medium temperature -40...+185 °C

Product connection

Port connection Threaded, welded or clamp connection

Environment and installation

Ambient temperature -40...+60 °C (see "7.2. Operating limits" on page 21)



2.3. Stainless steel body with PPS actuator

Product properties

Nominal diameter (port connection) DN 10...DN 80, NPS 3/8...NPS 3

Performance dataOperating pressure 0...25 bar(g), vacuum up to -0.9 bar(g) (option)
(see "7.1. Fluidic data" on page 14)**Maximum pilot pressure**

Actuator size 40 (C), 50 (D), 63 (E), 80 (F) 10 bar(g)

Actuator size 100 (G), 125 (H) 7 bar(g)

Media data

Medium temperature -40...+230 °C

Product connection

Port connection Threaded, welded or clamp connection






Environment and installationAmbient temperature -40...+140 °C (continuous operation...+130 °C)
(see "7.2. Operating limits" on page 21)

3. Control functions

⚠ WARNING

**Risk of damage due to bursting pipes and bursting equipment when the flow is above the seat.
In the case of liquid mediums, water hammer can occur, causing pipes and the device to burst.**

Do not use valves with flow above the seat for liquid mediums.

Symbol	Description	
Flow direction below seat for liquids, steam and gases		
	Control function A (CF A) Pneumatically operated 2/2-way on/off valve Flow direction below seat Normally closed by spring force	
	Control function B (CF B) Pneumatically operated 2/2-way on/off valve Flow direction below seat Normally opened by spring force	
Flow direction above seat for steam and gases		
	Control function A (CF A) Pneumatically operated 2/2-way on/off valve Flow direction above seat Normally closed by spring force	

4. Approvals and conformities

4.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants can be supplied with the below mentioned approvals or conformities.

4.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives. This includes the following directives:

- Pressure Equipment Directive 2014/68/EU
- Machinery Directive 2006/42/EC

4.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

4.4. Explosion protection

Approval	Description																
 	Optional: Explosion protection (valid for the variable code PX51) As a category 2 device suitable for zone 1/21 and zone 2/22. ATEX: EPS 18 ATEX 2 008 X II 2G Ex h IIC T4...T2 Gb II 2D Ex h IIIC T135 °C...T300 °C Db IECEx: IECEx EPS 18.0007X Ex h IIC T4...T2 Gb Ex h IIIC T135 °C...T300 °C Db <table><tr><td>Temperature class</td><td>T2</td><td>T3</td><td>T4</td></tr><tr><td>Maximum surface temperature</td><td>+ 300 °C</td><td>+ 200 °C</td><td>+ 135 °C</td></tr><tr><td>Ambient temperature</td><td>- 40...+ 130 °C</td><td>- 40...+ 130 °C</td><td>- 40...+ 100 °C</td></tr><tr><td>Maximum medium temperature</td><td>+ 285 °C</td><td>+ 185 °C</td><td>+ 125 °C</td></tr></table> Note: The ambient and medium temperature range may be limited by non-ex-relevant specifications. Observe the operating instructions.	Temperature class	T2	T3	T4	Maximum surface temperature	+ 300 °C	+ 200 °C	+ 135 °C	Ambient temperature	- 40...+ 130 °C	- 40...+ 130 °C	- 40...+ 100 °C	Maximum medium temperature	+ 285 °C	+ 185 °C	+ 125 °C
Temperature class	T2	T3	T4														
Maximum surface temperature	+ 300 °C	+ 200 °C	+ 135 °C														
Ambient temperature	- 40...+ 130 °C	- 40...+ 130 °C	- 40...+ 100 °C														
Maximum medium temperature	+ 285 °C	+ 185 °C	+ 125 °C														

4.5. Drinking water

Conformity	Description
	Suitable for use in drinking water applications The materials comply with the assessment principles (UBA) for materials in contact with drinking water (TrinkwasserV). Gunmetal body/stainless steel body PF39: Suitable for products with medium temperature up to 85 °C (hot water)

4.6. Foods and beverages/Hygiene

Conformity	Description
FDA	FDA – Code of Federal Regulations (valid for the variable code PL02) All wetted materials are compliant with the Code of Federal Regulations published by the FDA (Food and Drug Administration, USA) according to the manufacturer's declaration.
	EC Regulation 1935/2004 of the European Parliament and of the Council (valid for the variable code PL01, PL02) All wetted materials are compliant with EC Regulation 1935/2004/EC according to the manufacturer's declaration.
	China food GB Standards of the People's Republic of China (valid for the variable code PL10) All wetted materials are compliant with the requirement of China food GB Standards according to the manufacturer's declaration.

4.7. Others**DNV GL classification**

Approval	Description
	DNV GL classification – Ships, offshore units, and high speed and light craft The products are accepted for installation on all vessels classed by DNV GL.

Oxygen

Conformity	Description
	Optional: Suitability for oxygen (valid for the variable code NL02) The products are suitable for use with gaseous oxygen, according to the manufacturer's declaration.

Fuel gases

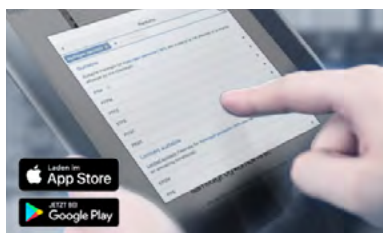
Conformity	Description
	Fuel gases (valid for the variable code PO19, PO20) The products comply with: - Regulation (EU) 2016/426 – Appliances burning gaseous fuels and - DVGW DIN EN 161 (Automatic shut-off valves for gas burners and gas appliances) and - DIN EN 16678, Class A or Class D (Safety and control devices for gas burners and gas burning appliances – Automatic shut-off valves for operating pressure of above 500 kPa up to and including 6 300 kPa)

TA Luft

Conformity	Description
TA Luft	Technical instruction on air quality control (valid for the variable code PM01)

5. Materials

5.1. Bürkert resistApp

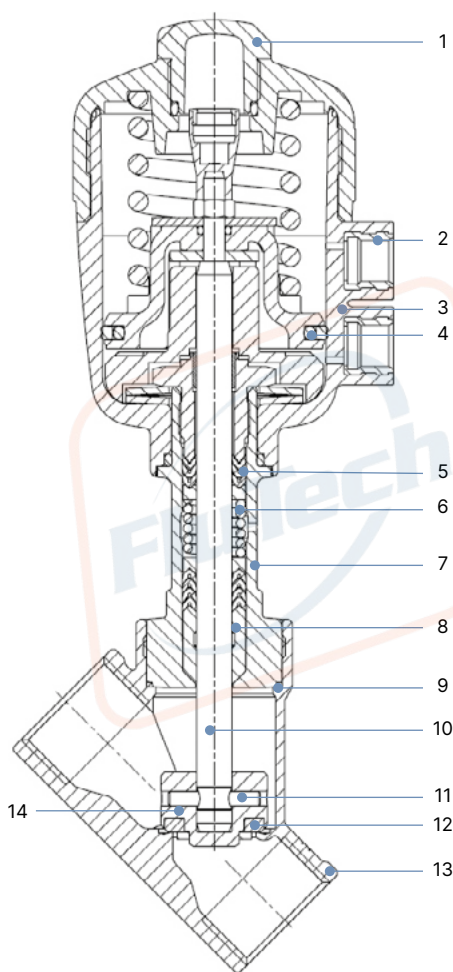


Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

5.2. Material specifications



No.	Element	Material		
		Gunmetal body with PA actuator	Stainless steel body with PA actuator	with PPS actuator
1	Transparent cover	PC	PC	PSU
2	Pilot air ports	Stainless steel 1.4305		
3	Actuator	PA	PA	PPS
4	Piston seal	NBR	NBR	FKM
5	Packing gland	PTFE V-Rings (filled), with spring compensation		
6	Spring	Stainless steel 1.4310		
7	Pipe ¹⁾	Brass	Stainless steel 1.4401 Stainless steel 316L ²⁾	Stainless steel 1.4401 Stainless steel 316L ²⁾
8	Wiper	PTFE (filled), PEEK ³⁾		
9	Body seal	Graphite, PTFE (option)		
10	Spindle	Stainless steel 1.4401 or 1.4404		
11	Pin	Stainless steel 1.4401 or 1.4404		
12	Seat seal	PTFE, PEEK (option), NBR (option), FKM (option)		
13	Valve body	Gun metal	Stainless steel 316L/CF3M	
14	Swivel plate	Brass	Stainless steel 1.4401 or 1.4404	

1.) In one piece for the actuator size 63 mm (E), 80 mm (F), 100 mm (G) and 125 mm (H)

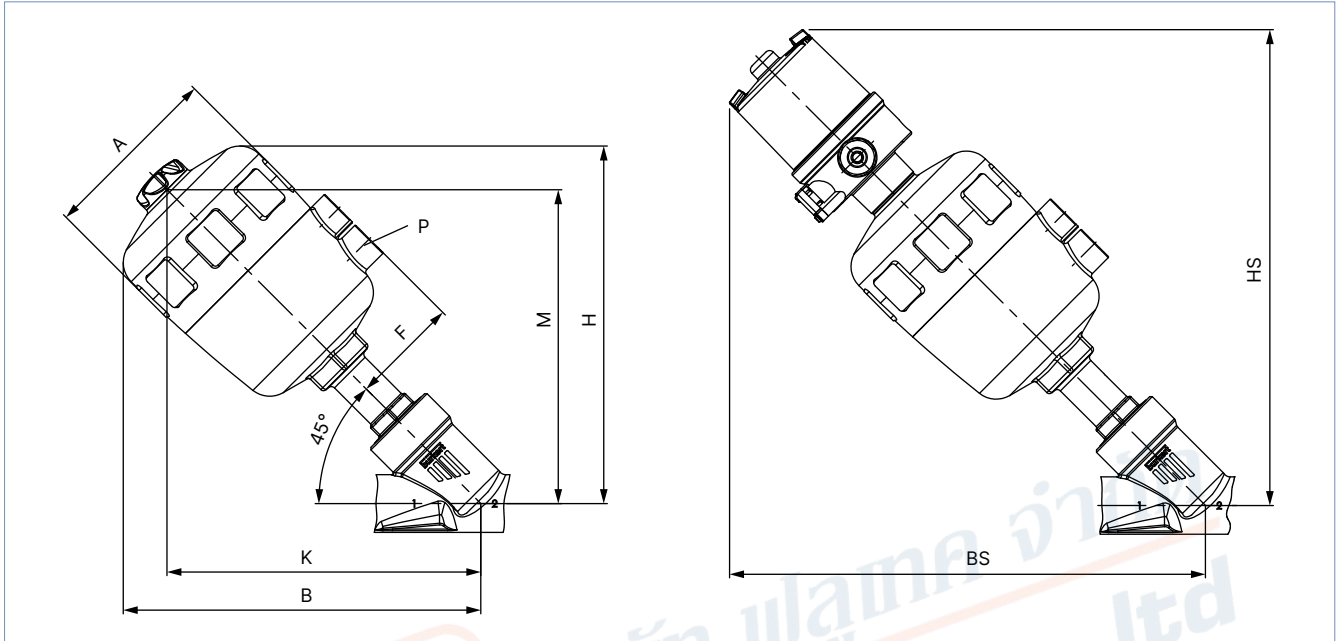
2.) For the actuator sizes 63 mm (E), 80 mm (F), 100 mm (G) and 125 mm (H)

3.) For the actuator sizes 100 mm (G) and 125 mm (H)

6. Dimensions

6.1. Actuator

Angle seat valve Type 2000 and valve system on/off CLASSIC Type 8801-YA



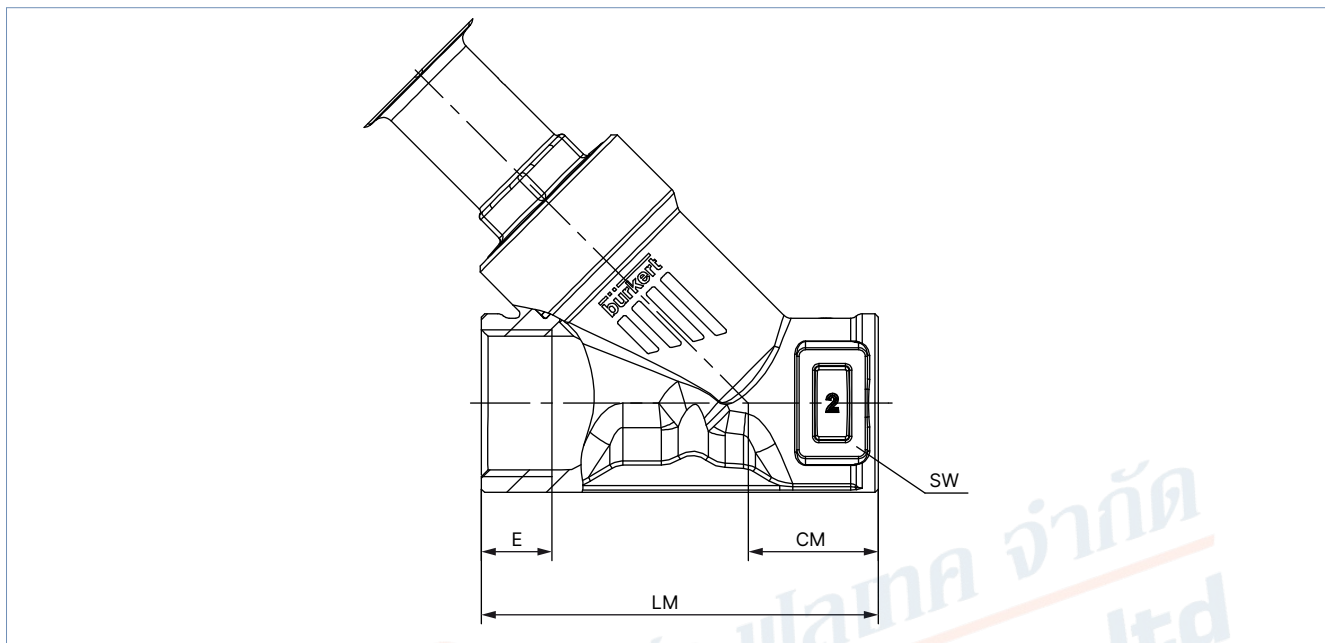
Nominal diameter (port connection)		Actuator size Ø	Ø A	B / H ¹⁾	K / M ¹⁾	P	BS / HS ¹⁾
DN	NPS		[mm]	[mm]	[mm]	[inch]	[mm]
10	3/8	40 (C)	53	127	110	G 1/8	198
		50 (D)	64	145	129	G 1/4	216
		63 (E)	80	177	158	G 1/4	246
15	1/2	40 (C)	53	127	110	G 1/8	198
		50 (D)	64	145	129	G 1/4	216
		63 (E)	80	177	158	G 1/4	246
20	3/4	40 (C)	53	130	113	G 1/8	201
		50 (D)	64	150	133	G 1/4	207
		63 (E)	80	174	155	G 1/4	243
		80 (F)	101	195	171	G 1/4	259
25	1	50 (D)	64	152	136	G 1/4	223
		63 (E)	80	178	159	G 1/4	242
		80 (F)	101	195	171	G 1/4	259
32	1 1/4	63 (E)	80	188	169	G 1/4	257
		80 (F)	101	209	185	G 1/4	273
		100 (G)	127	262	232	G 1/4	320
40	1 1/2	63 (E)	80	191	172	G 1/4	260
		80 (F)	101	213	188	G 1/4	277
		100 (G)	127	251	221	G 1/4	309
		125 (H)	158	291	254	G 1/4	342
50	2	63 (E)	80	209	190	G 1/4	278
		80 (F)	101	230	206	G 1/4	294
		100 (G)	127	277	247	G 1/4	335
		125 (H)	158	306	269	G 1/4	357
65	2 1/2	80 (F)	101	242	218	G 1/4	306
		100 (G)	127	290	260	G 1/4	348
		125 (H)	158	319	282	G 1/4	370
80	3	125 (H)	158	339	301	G 1/4	390

1.) The dimensions for B, H, K, M, HS and BS are maximum dimensions and may be up to 6 mm less, depending on the nominal diameter and standard.

6.2. Body with threaded connection

Note:

Dimensions in mm, unless otherwise stated

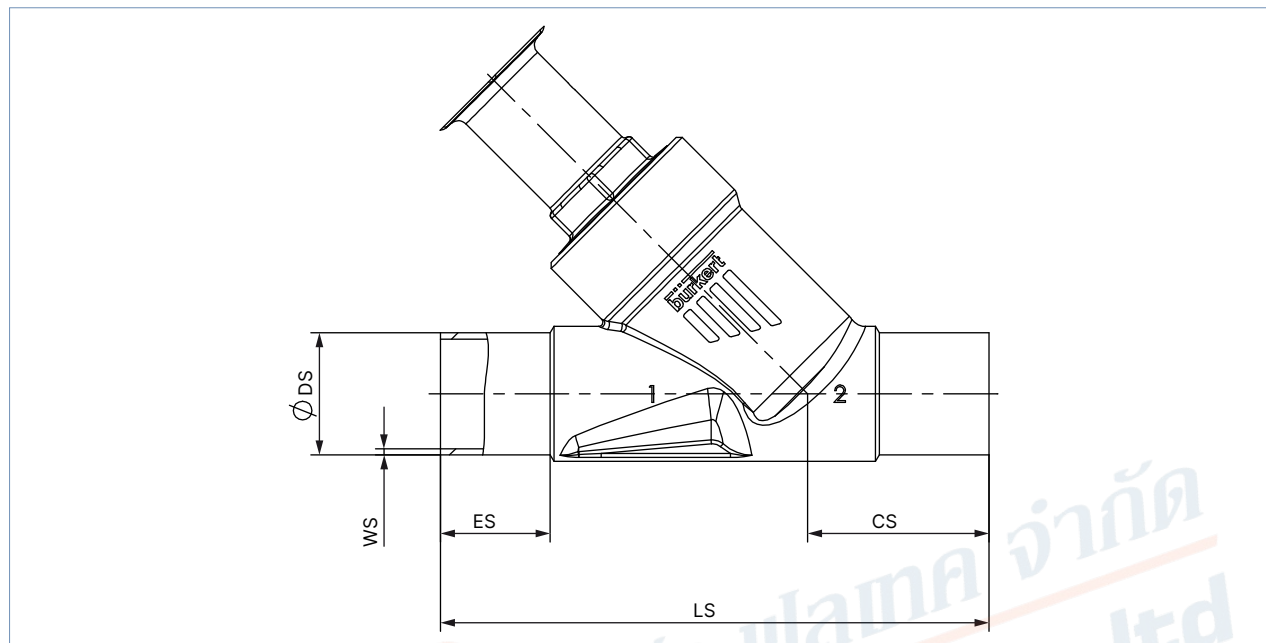


Nominal diameter (port connection)		G (DIN ISO 228-1) NPT (ASME B1.20.1) RC (ISO 7-1)			CM	LM	SW
DN	NPS	E	G	NPT	RC		
15	1/2	14	13.7	13.2	24	65	27
20	3/4	16	14.0	14.5	27	75	34
25	1	18	16.8	16.8	29.5	90	41
32	1 1/4	16	17.3	19.1	36	110	50
40	1 1/2	18	17.3	19.1	35	120	55
50	2	24	17.6	23.4	45	150	70
65	2 1/2	26	23.7	26.7	57	185	85
80	3	28	—	—	71	220	100

6.3. Body with welded connection

Note:

Dimensions in mm, unless otherwise stated



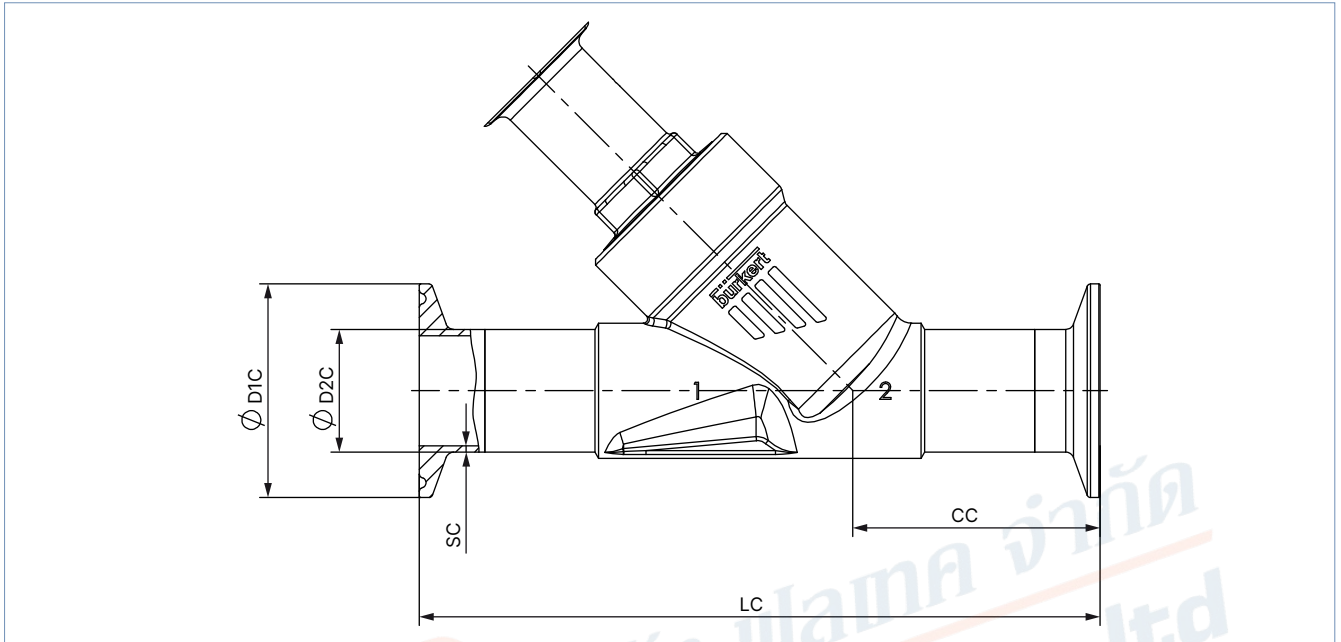
Nominal diameter (port connection)	DIN EN ISO 1127 / ISO 4200 / DIN 11866 series B					DIN 11850 - 2 / DIN 11866 series A				
	ES	CS	LS	Ø DS	WS	ES	CS	LS	Ø DS	WS
15	19	34	100	21.3	1.6	19	34	100	19	1.5
20	20	39	115	26.9	1.6	20	39	115	23	1.5
25	26	43	130	33.7	2.0	26	43	130	29	1.5
32	26	45	145	42.4	2.0	26	45	145	35	1.5
40	26	49	160	48.3	2.0	26	49	160	41	1.5
50	26	50	175	60.3	2.0	26	50	175	53	1.5
65	26	50	210	76.1	2.3	26	50	210	70	2
80	26	88.5	266	88.9	2.3	26	88.5	266	85	2

Nominal diameter (port connection)	ASME BPE / DIN 11866 series C				
	ES	CS	LS	Ø DS	WS
½	30	46	135	12.7	1.65
¾	30	52	145	19.05	1.65
1	30	51	152	25.4	1.65
1½	30	60	182	38.1	1.65
2	30	64	210	50.8	1.65
2½	26	56	230	63.5	1.65
3	26	88.5	266	76.2	1.65

6.4. Body with clamp connection

Note:

Dimensions in mm, unless otherwise stated



Nominal diameter (port connection)	Clamp: DIN 32676 series B Pipe: DIN EN ISO 1127 / ISO 4200 / DIN 11866 series B					Clamp: DIN 32676 series A (DN 15 similar DIN 32676 series B) Pipe: DIN 11850 - 2 / DIN 11866 series A				
	LC	CC	Ø D1 C	Ø D2 C	SC	LC	CC	Ø D1 C	Ø D2 C	SC
15	156	49.0	50.5	21.3	1.6	130	49.5	34.0	19	1.5
20	150	56.5	50.5	26.9	1.6	150	57.0	34.0	23	1.5
25	160	58.0	50.5	33.7	2.0	160	58.5	50.5	29	1.5
32	200	57.5	50.5	42.4	2.0	180	58.0	50.5	35	1.5
40	200	69.0	64.0	48.3	2.0	200	69.5	50.5	41	1.5
50	230	77.5	77.5	60.3	2.6	230	78.0	64.0	53	1.5

Nominal diameter (port connection)	Clamp: ASME BPE Pipe: ASME BPE / DIN 11866 series C				
	LC	CC	Ø D1 C	Ø D2 C	SC
1/2	130	49.0	25.0	12.7	1.65
3/4	150	56.5	25.0	19.05	1.65
1	160	58.0	50.5	25.4	1.65
1 1/2	200	69.0	50.5	38.1	1.65
2	230	77.5	64.0	50.8	1.65

7. Performance specifications

7.1. Fluidic data

Overview of fluidic data for flow below seat (for liquids, steam and gases)

Note:

- K_v value [m^3/h]: Measured with water at + 20 °C, 1 bar(g) pressure at valve inlet and free outlet
- C_v value [GMP(US)] = $K_v \times 1.156$

Threaded port G, NPT and RC

Nominal diameter (port connection)		Seat size	Actuator size Ø	K _v value water	Pilot pressure min.	Operating pressure max.		
						CF A		CF B
						Seat seal		
						PTFE	PEEK	PTFE
DN	NPS	DN	[mm]	[m³/h]	[bar(g)]	[bar(g)]	[bar(g)]	[bar(g)]
8	¼	15	40 (C)	2.6	4	15	–	16
			50 (D)	2.6	4.1	16	–	16
			63 (E)	2.6	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
10	⅜		40 (C)	4.7	4	15	–	16
			50 (D)	5	4.1	16	–	16
			63 (E)	5.4	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
15	½		40 (C)	4.7	4	15	–	16
			50 (D)	5	4.1	16	–	16
			63 (E)	5.4	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
20	¾	20	40 (C)	8.4	4	6.5	–	16
			50 (D)	10	4.1	11	–	16
			63 (E)	11	4.5	20 ^{1.)}	16	25 ^{1.)}
			80 (F)	11	5	25 ^{1.)}	25 ^{1.)}	–
25	1	25	50 (D)	15	4.1	5.2	–	16
			63 (E)	19	4.5	11	–	25 ^{1.)}
			80 (F)	19	5	25 ^{1.)}	21 ^{1.)}	25 ^{1.)}
32	1¼	32	63 (E)	29	4.5	6	–	25 ^{1.)}
			80 (F)	30	5	14	11.5	25 ^{1.)}
			100 (G)	32	4.4	16	–	–
			125 (H)	32	4.1	25 ^{1.)}	25 ^{1.)}	–
40	1½	40	63 (E)	38	4.5	4	–	24 ^{1.)}
			80 (F)	40	5	9	–	25 ^{1.)}
			100 (G)	47	4.4	12.5	–	25 ^{1.)}
			125 (H)	46	4.1	25 ^{1.)}	25 ^{1.)}	–
50	2	50	63 (E)	44	4.5	2.5	–	13
			80 (F)	49	5	6	–	25 ^{1.)} (20 ^{2.)})
			100 (G)	62	4.4	7.2	–	25 ^{1.)} (20 ^{2.)})
			125 (H)	62	5.7	24 ^{1.)} (20 ^{2.)})	19 ^{1.)}	–
65	2½	65	80 (F)	74	5	3.5	–	15
			125 (H)	91	5.7	12	10	23 ^{1.)} (15 ^{2.)})
80	3	80	125 (H)	140	5.7	7.5	–	14 ^{1.)} (12.5 ^{2.)})

1.) Gunmetal variants are limited to a maximum of 16 bar(g).

2.) According to pressure equipment directive 2014/68/EU for compressible fluids of group 1 (dangerous gases and vapours according to Article 4, paragraph (1), c), i), first indent)

Welded connection DIN 11850 series 2, DIN 11866 series A, DIN EN 10357 series A

Nominal diameter (port connection)		Seat size	Actuator size Ø	K _v value water	Pilot pressure min.	Operating pressure max.		
						CF A		CF B
						Seat seal		
						PTFE	PEEK	PTFE
DN	NPS	DN	[mm]	[m³/h]	[bar(g)]	[bar(g)]	[bar(g)]	[bar(g)]
10	⅜	15	40 (C)	2.5	4	15	—	16
			50 (D)	2.5	4.1	16	—	16
			63 (E)	2.5	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
15	½	20	40 (C)	4.7	4	15	—	16
			50 (D)	5	4.1	16	—	16
			63 (E)	5.4	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
20	¾	20	40 (C)	8.4	4	6.5	—	16
			50 (D)	10	4.1	11	—	16
			63 (E)	11	4.5	20 ^{1.)}	16	25 ^{1.)}
			80 (F)	11	5	25 ^{1.)}	25 ^{1.)}	—
25	1	25	50 (D)	14	4.1	5.2	—	16
			63 (E)	19	4.5	11	—	25 ^{1.)}
			80 (F)	19	5	25 ^{1.)}	21 ^{1.)}	25 ^{1.)}
32	1¼	32	63 (E)	26	4.5	6	—	25 ^{1.)}
			80 (F)	26	5	14	11.5	25 ^{1.)}
			100 (G)	30	4.4	16	—	—
			125 (H)	30	4.1	25 ^{1.)}	25 ^{1.)}	—
40	1½	40	63 (E)	33	4.5	4	—	24 ^{1.)}
			80 (F)	35	5	9	—	25 ^{1.)}
			100 (G)	41	4.4	12.5	—	25 ^{1.)}
			125 (H)	40	4.1	25 ^{1.)}	25 ^{1.)}	—
50	2	50	63 (E)	44	4.5	2.5	—	13
			80 (F)	49	5	6	—	25 ^{1.)} (20 ^{2.)})
			100 (G)	60	4.4	7.2	—	25 ^{1.)} (20 ^{2.)})
			125 (H)	60	5.7	24 ^{1.)} (20 ^{2.)})	19 ^{1.)}	—
65	2½	65	80 (F)	74	5	3.5	—	15
			125 (H)	91	5.7	12	10	23 ^{1.)} (15 ^{2.)})
80	3	80	125 (H)	140	5.7	7.5	—	14 ^{1.)} (12.5 ^{2.)})

1.) Gunmetal variants are limited to a maximum of 16 bar(g).

2.) According to pressure equipment directive 2014/68/EU for compressible fluids of group 1 (dangerous gases and vapours according to Article 4, paragraph (1), c), i), first indent)

Welded connection ISO 4200, DIN EN ISO 1127, DIN 11866 series B / Flange DIN EN 1092 - 1 (PN 25)

Nominal diameter (port connection)		Seat size	Actuator size Ø	K _v value water	Pilot pressure min.	Operating pressure max.		
						CF A		CF B
						Seat seal		
						PTFE	PEEK	PTFE
OD [mm]	NPS	DN	[mm]	[m³/h]	[bar(g)]	[bar(g)]	[bar(g)]	[bar(g)]
13.5	–	15	40 (C)	2.5	4	15	–	16
			50 (D)	2.5	4.1	16	–	16
			63 (E)	2.5	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
17.2			40 (C)	4.7	4	15	–	16
			50 (D)	5	4.1	16	–	16
			63 (E)	5.4	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
21.3			40 (C)	4.7	4	15	–	16
			50 (D)	5	4.1	16	–	16
			63 (E)	5.4	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
26.9		20	40 (C)	8.4	4	6.5	–	16
			50 (D)	10	4.1	11	–	16
			63 (E)	11	4.5	20 ^{1.)}	16	25 ^{1.)}
			80 (F)	11	5	25 ^{1.)}	25 ^{1.)}	–
33.7		25	50 (D)	15	4.1	5.2	–	16
			63 (E)	19	4.5	11	–	25 ^{1.)}
			80 (F)	19	5	25 ^{1.)}	21 ^{1.)}	25 ^{1.)}
42.4		32	63 (E)	29	4.5	6	–	25 ^{1.)}
			80 (F)	30	5	14	11.5	25 ^{1.)}
			100 (G)	32	4.4	16	–	–
			125 (H)	32	4.1	25 ^{1.)}	25 ^{1.)}	–
48.3		40	63 (E)	38	4.5	4	–	24 ^{1.)}
			80 (F)	40	5	9	–	25 ^{1.)} (20 ^{2.)})
			100 (G)	47	4.4	12.5	–	25 ^{1.)} (20 ^{2.)})
			125 (H)	46	4.1	25 ^{1.)}	25 ^{1.)}	–
60.3		50	63 (E)	44	4.5	2.5	–	13
			80 (F)	49	5	6	–	25 ^{1.)}
			100 (G)	62	4.4	7.2	–	25 ^{1.)}
			125 (H)	62	5.7	24 ^{1.)} (20 ^{2.)})	19 ^{1.)}	–
76.1		65	80 (F)	74	5	3.5	–	15
			125 (H)	91	5.7	12	10	23 ^{1.)} (15 ^{2.)})
88.9		80	125 (H)	140	5.7	7.5	–	14 ^{1.)} (12.5 ^{2.)})

1.) Gunmetal variants are limited to a maximum of 16 bar(g).

2.) According to pressure equipment directive 2014/68/EU for compressible fluids of group 1 (dangerous gases and vapours according to Article 4, paragraph (1), c), i), first indent)

Welded connection ASME BPE, DIN 11866 series C / Clamp ASME BPE

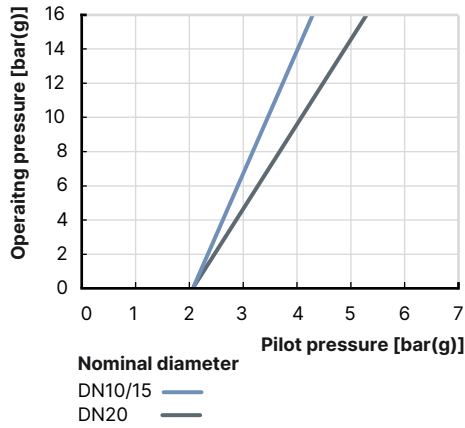
Nominal diameter (port connection)		Seat size	Actuator size Ø	K _v value water	Pilot pressure min.	Operating pressure max.		
						CF A		CF B
						Seat seal		
						PTFE	PEEK	PTFE
DN	NPS	DN	[mm]	[m³/h]	[bar(g)]	[bar(g)]	[bar(g)]	[bar(g)]
15	½	15	40 (C)	1.6	4	15	–	16
			50 (D)	1.6	4.1	16	–	16
			63 (E)	1.6	4.5	25 ^{1.)}	25 ^{1.)}	25 ^{1.)}
20	¾	20	40 (C)	6.9	4	6.5	–	16
			50 (D)	8.4	4.1	11	–	16
			63 (E)	9.6	4.5	20 ^{1.)}	16	25 ^{1.)}
			80 (F)	9.4	5	25 ^{1.)}	25 ^{1.)}	–
25	1	25	50 (D)	13	4.1	5.2	–	16
			63 (E)	16	4.5	11	–	25 ^{1.)}
			80 (F)	16	5	25 ^{1.)}	21 ^{1.)}	25 ^{1.)}
40	1½	40	63 (E)	32	4.5	4	–	24 ^{1.)}
			80 (F)	35	5	9	–	25 ^{1.)}
			100 (G)	41	4.4	12.5	–	25 ^{1.)}
			125 (H)	40	4.1	25 ^{1.)}	25 ^{1.)}	–
50	2	50	63 (E)	44	4.5	2.5	–	13
			80 (F)	49	5	6	–	25 ^{1.)} (20 ^{2.)})
			100 (G)	58	4.4	7.2	–	25 ^{1.)} (20 ^{2.)})
			125 (H)	58	5.7	24 ^{1.)} (20 ^{2.)})	19 ^{1.)}	–
65	2½	65	80 (F)	74	5	3.5	–	15
			125 (H)	85	5.7	12	10	23 ^{1.)} (15 ^{2.)})
80	3	80	125 (H)	91	5.7	12	10	23 ^{1.)} (15 ^{2.)})
80	3		125 (H)	140	5.7	7.5	–	14 ^{1.)} (12.5 ^{2.)})

1.) Gunmetal variants are limited to a maximum of 16 bar(g).

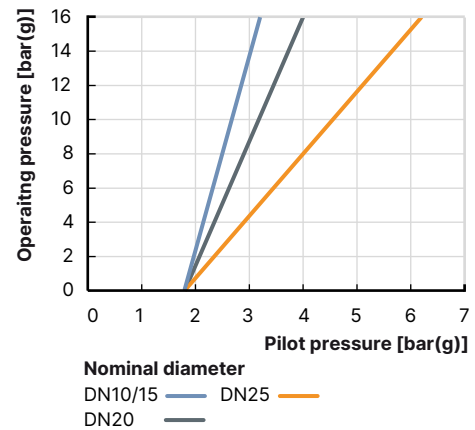
2.) According to pressure equipment directive 2014/68/EU for compressible fluids of group 1 (dangerous gases and vapours according to Article 4, paragraph (1), c), i), first indent)

Pilot pressure diagrams with flow direction below seat (control function B, seat seal PTFE)**Actuator size Ø 40 mm (C)**

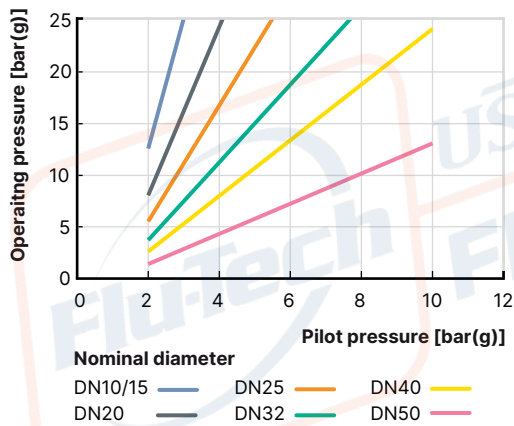
Maximum pilot pressure 10 bar(g)

**Actuator size Ø 50 mm (D)**

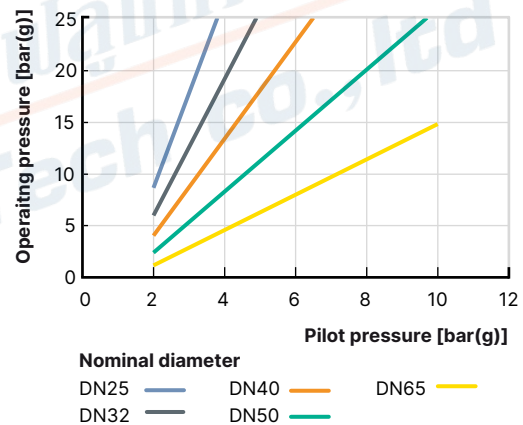
Maximum pilot pressure 10 bar(g)

**Actuator size Ø 63 mm (E)**

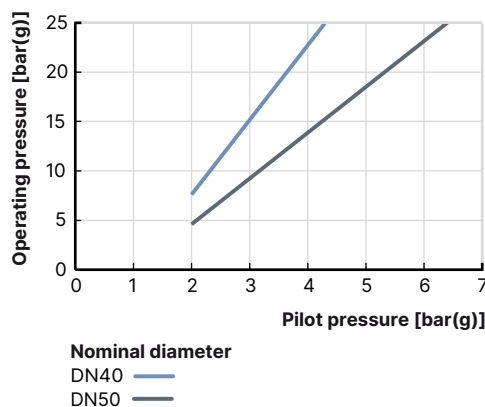
Maximum pilot pressure 10 bar(g)

**Actuator size Ø 80 mm (F)**

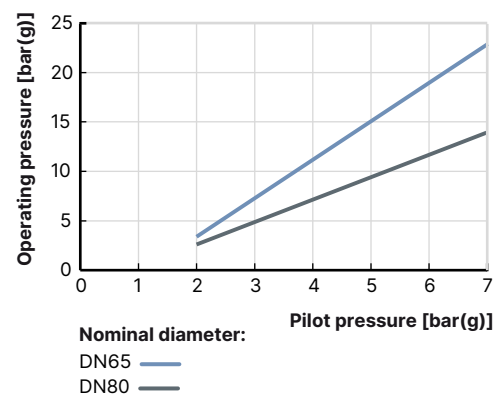
Maximum pilot pressure 10 bar(g)

**Actuator size Ø 100 mm (G)**

Maximum pilot pressure 7 bar(g)

**Actuator size Ø 125 mm (H)**

Maximum pilot pressure 7 bar(g)



Overview of fluidic data with flow above seat (for gases and steam)**Note:**

- K_v value [m³/h]: Measured with water at + 20 °C, 1 bar(g) pressure at valve inlet and free outlet
- K_v value water: see **"Overview of fluidic data for flow below seat (for liquids, steam and gases)" on page 14**
- Pressure data [bar(g)]: Overpressure to atmospheric pressure

! WARNING

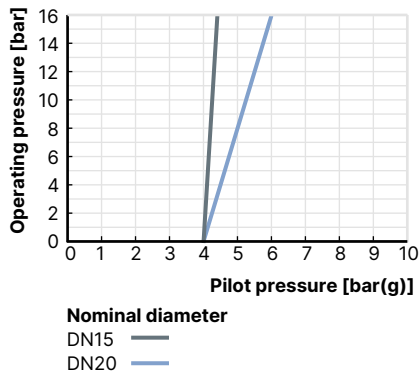
**Risk of damage due to bursting pipes and bursting equipment when the flow is above the seat.
In the case of liquid mediums, water hammer can occur, causing pipes and the device to burst.**

Do not use valves with flow above the seat for liquid mediums.

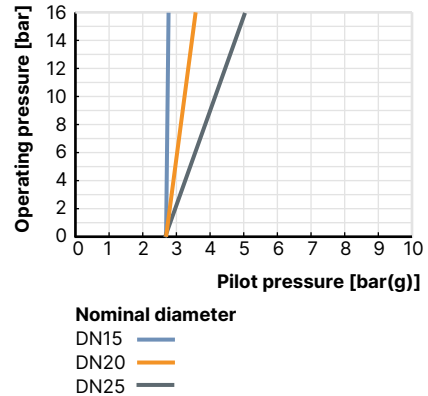
Nominal diameter (port connection)		Actuator size Ø	Operating pressure max.
			CF A
			PTFE
DN	NPS	[mm]	[bar(g)]
10	3/8	40 (C)	16
		50 (D)	16
15	1/2	40 (C)	16
		50 (D)	16
20	3/4	40 (C)	16
		50 (D)	16
25	1	50 (D)	16
		63 (E)	16
32	1 1/4	63 (E)	16
40	1 1/2	63 (E)	16
		80 (F)	16
50	2	63 (E)	16
		80 (F)	16
65	2 1/2	80 (F)	14
		100 (G)	15

Pilot pressure diagram with flow direction above seat (control function A, seat seal PTFE)**Actuator size Ø 40 mm**

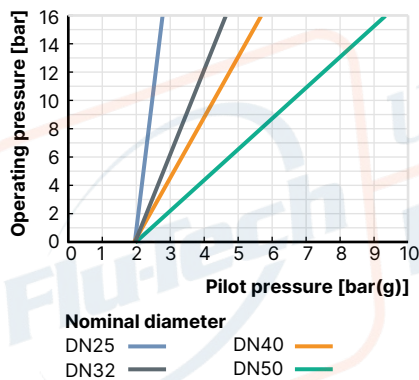
Maximum pilot pressure 10 bar(g)

**Actuator size Ø 50 mm**

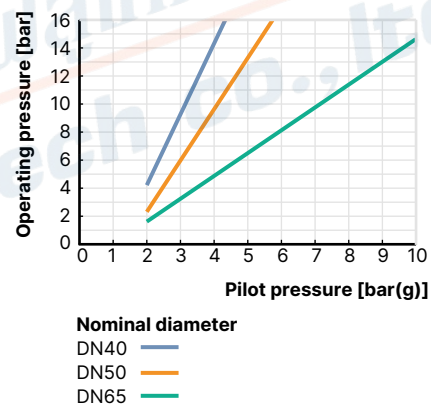
Maximum pilot pressure 10 bar(g)

**Actuator size Ø 63 mm**

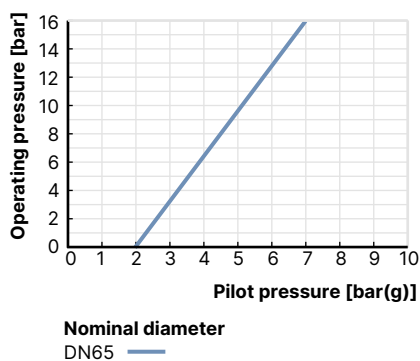
Maximum pilot pressure 10 bar(g)

**Actuator size Ø 80 mm**

Maximum pilot pressure 10 bar(g)

**Actuator size Ø 100 mm**

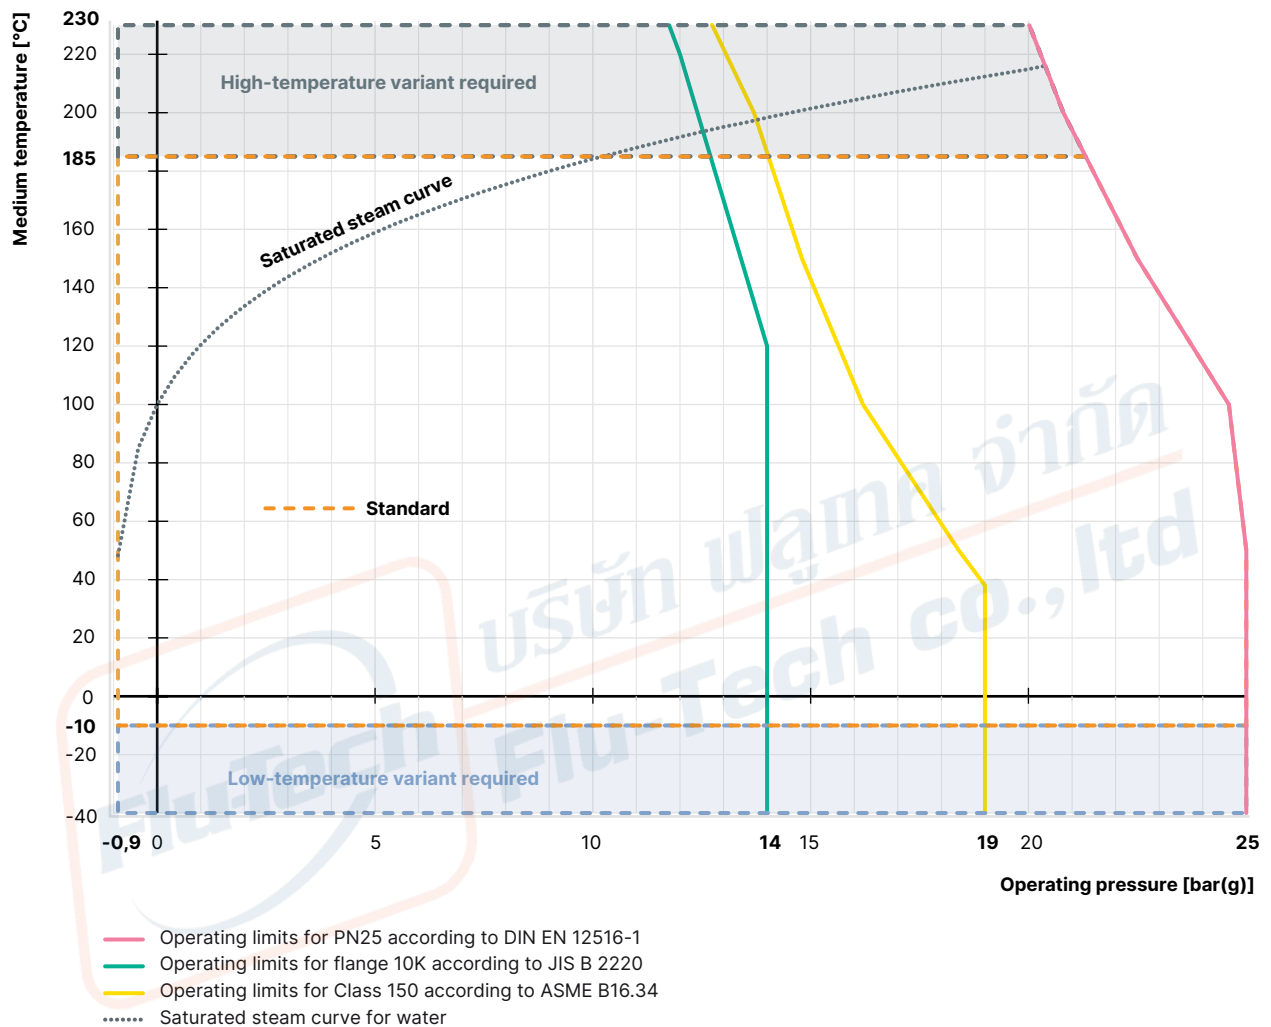
Maximum pilot pressure 7 bar(g)



7.2. Operating limits

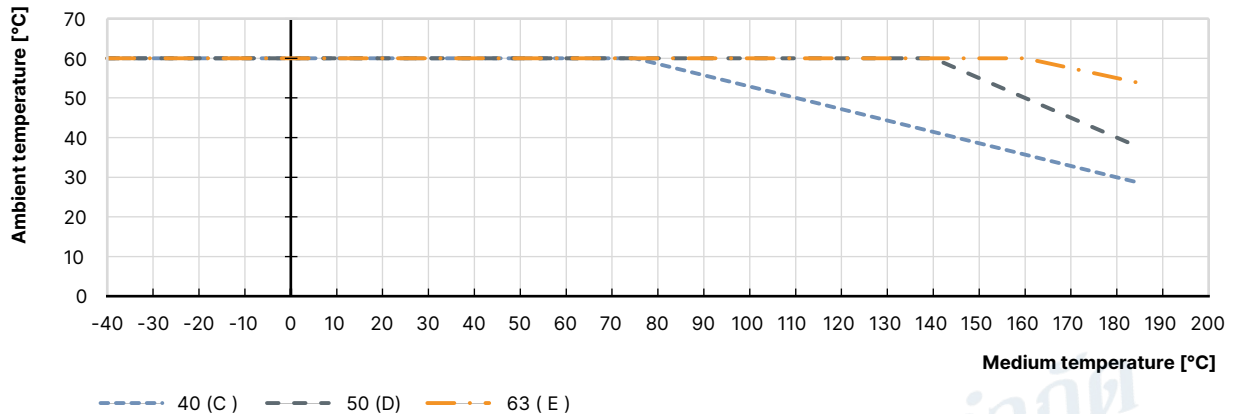
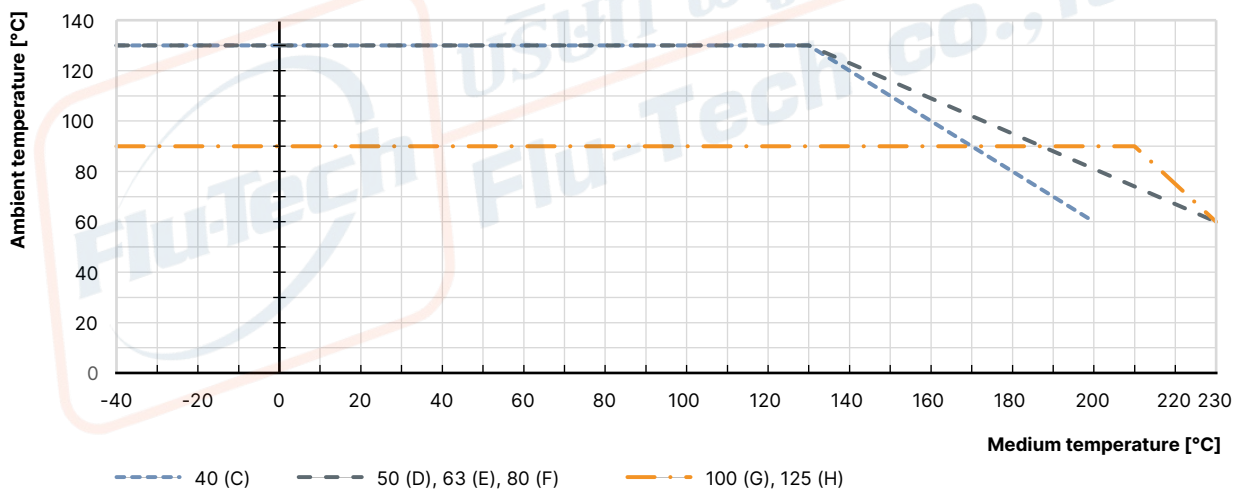
Operating limits for medium temperature and operating pressure

In addition to the maximum operating pressures, the operating range of Bürkert process valves is limited by the nominal pressure according to the relevant standard.



Operating limits for ambient and medium temperature**Note:**

For size 40, 50 and 63 PA actuators, the combination of maximum medium temperature and maximum ambient temperature is shown in the following diagram:

Classic PA actuator**Classic PPS actuator****Operating limits for optional variants****High-temperature variant**

Thanks to an adaption of the packing gland and seat seal in PEEK, this variant is suitable for applications with steam, neutral gases and other heat transfer mediums up to + 230 °C.

Water variant

For applications with water up to + 200 °C, a special configuration of the spindle seal increases service life significantly. It is recommended for water temperatures starting at + 85 °C.

Vacuum variant

Without leakage bore, this design is suitable for pressures down to - 0.9 bar(g).

Low-temperature variant

Suitable for minimum medium temperatures down to - 40 °C

8. Product accessories

Electric position feedback indicator

Type 8697 ▶ Actuator size Ø 40 (C)...125 (H)



The position feedback Type 8697 is designed for integrated mounting on CLASSIC series 20XX process valves, suiting the requirements of hygienic process environments. Mechanical or inductive limit switches register the position of the valve.

Features

- Compact design
- LED position indicator
- Mechanical or inductive limit switches for end position registering
- Easy-to-clean clean chemically resistant housing featuring IP65/IP67, 4X Rating
- Optionally intrinsically safe variant according to IECEx

Customer benefits

- Easy and quick installation
- High level of signal reliability thanks to self-adjusting limit switches
- Minimised space requirement in the plant piping for more flexibility in plant design

Adaptation for proximity switch

Type 2XXX ▶



Various options for the use of inductive proximity switches are available for the CLASSIC series actuators:

- Nipple
- Support bracket, 1-fold
- Support bracket, 2-fold

Plunger valve 3/2-way direct acting

Type 6012 ▶ for Actuator size Ø 40 (C)...63 (E), Type 6014 ▶ for Actuator size Ø 50 (D)...125 (H)



For easy direct mounting to a pneumatic actuator, a banjo connection with banjo bolt is the ideal solution. An optional manual override allows fast commissioning and optimum maintenance.

In conjunction with a cable plug according to DIN EN 175301 - 803 Form A or B, the valves meet protection class IP65.

Features

- High reliability
- Resistant according to IP65

Customer benefits

Easy and quick installation

Stroke limiter

Type 2XXX ▶



Stroke limitations can be used to limit the minimum and maximum flow rate of the valves.

Different variants are available:

- Maximum stroke limitation
- Maximum and minimum stroke limitation with optical position indicator

9. Networking and combination with other Bürkert products

The **angled seat valve Type 2000** can be combined with the **feedback positioner Type 8697** to form the **valve system on/off CLASSIC Type 8801-YA**.

Note:

- For the configuration of further valve systems use the **Product Enquiry Form** (see **"10.3. Bürkert Product Enquiry Form" on page 25**).
- You order two components and receive a completely assembled and tested valve.



10. Ordering information

10.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

10.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

10.3. Bürkert Product Enquiry Form

Note:

Please see our Product Enquiry Form for a full explanation of our specification key.

Bürkert Product Enquiry Form – Your enquiry quickly and compactly

Would you like to make a specific product enquiry based on your technical requirements? Use our Product Enquiry Form for this purpose. There you will find all the relevant information for your Bürkert contact. This will enable us to provide you with the best possible advice.

[Fill out the form now](#)

10.4. Ordering chart threaded connection

Valve with flow direction below seat

Control function	Nominal diameter (port connection)	Actuator size Ø	Pilot pressure min.	Operating pressure max.	Article no.	Operating pressure max.	Article no.	
	NPS	[mm]	[bar(g)]	[bar(g)]	PA actuator		PA actuator	PPS actuator
DIN ISO 228 - 1				Gunmetal body		Stainless steel body		
A (CF A) see control functions ¹⁾	3⁄8	40 (C)	4.0	15	344651 𐄂	15	342352 𐄂	344649 𐄂
	1⁄2	40 (C)	4.0	15	342508 𐄂	15	345487 𐄂	344645 𐄂
		50 (D)	4.1	16	344665 𐄂	16	341191 𐄂	344663 𐄂
	3⁄4	50 (D)	4.1	11	344662 𐄂	11	344660 𐄂	344659 𐄂
		63 (E)	4.5	16	344654 𐄂	20	342666 𐄂	344652 𐄂
	1	63 (E)	4.5	11	344658 𐄂	11	344656 𐄂	344655 𐄂
		80 (F)	5.0	16	344768 𐄂	25	342693 𐄂	344822 𐄂
	1¼	80 (F)	5.0	14	344680 𐄂	14	340789 𐄂	344676 𐄂
	1½	80 (F)	5.0	9	344675 𐄂	9	343142 𐄂	344673 𐄂
		125 (H)	3.2	16	343138 𐄂	16	342695 𐄂	o. r.
		125 (H)	4.1	–	–	25	344989 𐄂	o. r.
	2	100 (G)	4.4	7.2	183193 𐄂	7.2	344381 𐄂	344382 𐄂
		125 (H)	3.2	10	344411 𐄂	10	o. r.	o. r.
		125 (H)	5.7	–	–	24 (20 ³⁾)	20001172 𐄂	o. r.
	2½	125 (H)	3.2	5.2	344384 𐄂	5.2	344385 𐄂	344432 𐄂
		125 (H)	5.7	–	–	12	o. r.	361565 𐄂
		125 (H)	5.7	–	–	7.5	350628 𐄂	o. r.
	B (CF B) see control functions ¹⁾	3⁄8	40 (C)	See diagrams ²⁾	16	344510 𐄂	16	344517 𐄂
1⁄2		40 (C)	16		344641 𐄂	16	344642 𐄂	344643 𐄂
		50 (D)	16		344672 𐄂	16	344670 𐄂	344669 𐄂
3⁄4		50 (D)	16		344668 𐄂	16	344667 𐄂	344666 𐄂
1		50 (D)	16		344685 𐄂	16	344683 𐄂	344682 𐄂
1¼		63 (E)	16		344681 𐄂	25	344687 𐄂	344686 𐄂
1½		63 (E)	16		344698 𐄂	25	344696 𐄂	344695 𐄂
		63 (E)	13		342965 𐄂	13	344386 𐄂	344433 𐄂
2		80 (F)	16		344412 𐄂	25 (20 ³⁾)	344413 𐄂	344459 𐄂
		80 (F)	15		439038 𐄂	15	344387 𐄂	344434 𐄂
2½		80 (F)	–		–	14 (12.5 ³⁾)	370263 𐄂	o. r.
3		125 (H)	–		–	–	–	–

o. r. = on request

1.) For more information, refer to the chapter "3. Control functions" on page 6.

2.) See diagrams in chapter "Pilot pressure diagrams with flow direction below seat (control function B, seat seal PTFE)" on page 18

3.) According to pressure equipment directive 2014/68/EU for compressible fluids of group 1 (dangerous gases and vapours according to article 4, paragraph (1), c), i), first indent)

Valve with flow direction above seat

Note:

See diagrams in chapter "Pilot pressure diagram with flow direction above seat (control function A, seat seal PTFE)" on page 20.

Control function	Nominal diameter (port connection)	Actuator size Ø	Operating pressure max.	Article no.		
	NPS			[m³/h]	[bar(g)]	PA actuator
DIN ISO 228-1				Gunmetal body	Stainless steel body	
A (CF A) see control functions ¹⁾	⅜	40 (C)	16	344782 ⅜	344516 ⅜	o. r.
	½	50 (D)	16	344734 ½	344761 ½	344765 ½
	¾	40 (C)	16	344803 ¾	344820 ¾	o. r.
		50 (D)	16	344741 ¾	344740 ¾	344709 ¾
	1	50 (D)	16	344763 1	344793 1	344827 1
		63 (E)	16	344694 1	344693 1	344692 1
	1¼	63 (E)	16	344691 1¼	344700 1¼	344699 1¼
	1½	63 (E)	16	344703 1½	344702 1½	344701 1½
	2	63 (E)	16	344383 2	344395 2	344454 2
	2½	80 (F)	14	344394 2½	344396 2½	344457 2½
100 (G)		15	344485 2½	344487 2½	o. r.	

o. r. = on request

1.) For more information, refer to the chapter "3. Control functions" on page 6.

Further variants on request			
	Approval Food processing, drinking water, oxygen, fuel gases, explosion protection		Pressure Other variants for operating pressures up to 25 bar(g) Vacuum variant down to -0.9 bar(g)
	Material Seal: NBR, FKM, EPDM		Temperature High temperature variant up to + 230 °C Hot water variant up to + 200 °C Low temperature variant down to - 40 °C
	Process connection Clamp connection, welded connection		

10.5. Ordering chart welded connection

Valve with flow direction below seat

Control function	Nominal diameter (port connection)	Actuator size Ø	Port connection Pipe Ø	Pilot pressure min.	Operating pressure max.	Article no.	
	NPS	[mm]	[mm]	[bar(g)]	[bar(g)]	PA actuator	PPS actuator
DIN EN ISO 1127 / ISO 4200							
A (CF A) see control functions ^{1.)}	15	50 (D)	21.3 × 1.6	4.1	16	344388 	344473 
	20	50 (D)	26.9 × 1.6	4.1	11	344389 	344474 
	25	63 (E)	33.7 × 2.0	4.5	11	344390 	344475 
	32	80 (F)	42.4 × 2.0	5	14	344391 	344450 
	40	80 (F)	48.3 × 2.0	5	9	344392 	344483 
	50	100 (G)	60.3 × 2.0	4.4	7.2	345012 	356461 
	65	125 (H)	76.1 × 2.3	3.2	5.2	344588 	o. r.
			76.1 × 2.3	5.7	12	20001505 	o. r.
B (CF B) see control functions ^{1.)}	15	50 (D)	21.3 × 1.6	See diagrams ^{2.)}	16	345485 	344478 
	20	50 (D)	26.9 × 1.6		16	344405 	344479 
	25	63 (E)	33.7 × 2.0		25	344406 	o. r.
	32	63 (E)	42.4 × 2.0		25	344407 	o. r.
	40	63 (E)	48.3 × 2.0		25	344408 	353580 
	50	63 (E)	60.3 × 2.0		13	345013 	o. r.
	65	80 (F)	76.1 × 2.3		15	344609 	o. r.
DIN 11850 - 2							
A (CF A) see control functions ^{1.)}	15	50 (D)	19 × 1.5	4.1	16	344267 	344557 
	20	50 (D)	23 × 1.5	4.1	11	344522 	344559 
	25	63 (E)	29 × 1.5	4.5	11	344523 	344540 
	32	80 (F)	35 × 1.5	5	14	344524 	352462 
	40	80 (F)	41 × 1.5	5	9	344525 	352468 
	50	100 (G)	53 × 1.5	4.4	7.2	344526 	352467 
	65	125 (H)	70 × 2.0	3.2	5.2	344614 	o. r.
			70 × 2.0	5.7	12	20015086 	o. r.
B (CF B) see control functions ^{1.)}	15	50 (D)	19 × 1.5	See diagrams ^{2.)}	16	344527 	352208 
	20	50 (D)	23 × 1.5		16	344528 	344558 
	25	63 (E)	29 × 1.5		25	344530 	366314 
	32	63 (E)	35 × 1.5		25	344531 	352385 
	40	63 (E)	41 × 1.5		25	344532 	352387 
	50	63 (E)	53 × 1.5		13	344533 	154903 
	65	80 (F)	70 × 2.0		15	344617 	o. r.
ASME BPE							
A (CF A) see control functions ^{1.)}	½	50 (D)	12.7 × 1.65	4.1	16	344549 	344547 
	¾	50 (D)	19.05 × 1.65	4.1	11	344726 	o. r.
	1	63 (E)	25.4 × 1.65	4.5	11	345476 	344879 
	1½	80 (F)	38.1 × 1.65	5	9	344553 	o. r.
	2	100 (G)	50.8 × 1.65	4.4	7.2	344727 	o. r.
B (CF B) see control functions ^{1.)}	½	50 (D)	12.7 × 1.65	See diagrams ^{2.)}	16	344550 	364483 
	¾	50 (D)	19.05 × 1.65		16	344583 	o. r.
	1	63 (E)	25.4 × 1.65		25	183280 	o. r.
	1½	63 (E)	38.1 × 1.65		25	344554 	o. r.
	2	63 (E)	50.8 × 1.65		13	344630 	o. r.

o. r. = on request

1.) For more information, refer to the chapter "3. Control functions" on page 6.

2.) See diagrams in chapter "Pilot pressure diagrams with flow direction below seat (control function B, seat seal PTFE)" on page 18

Valve with flow direction above seat

The following tables refer to valves with stainless steel body, n actuator of PA and Ra inside from $\leq 3.2 \mu\text{m}$.

Control function	Nominal diameter (port connection)	Actuator size Ø	Port connection Pipe Ø	Pilot pressure min.	Operating pressure max.	Article no.	
	NPS	[mm]	[mm]	[bar(g)]	[bar(g)]	PA actuator	PPS actuator
DIN EN ISO 1127 / ISO 4200							
A (CF A) see control functions ¹⁾	15	50 (D)	21.3 × 1.6	See diagrams ²⁾	16	344402 	352370 
	20	50 (D)	26.9 × 1.6		16	344401 	o. r.
	25	63 (E)	33.7 × 2		16	344400 	352457 
	32	63 (E)	42.4 × 2		16	344397 	o. r.
	40	63 (E)	48.3 × 2		16	344398 	344480 
	50	63 (E)	60.3 × 2.0		16	345014 	o. r.
	65	80 (F)	76.1 × 2.3		14	345146 	o. r.
DIN 11850 - 2							
A (CF A) see control functions ¹⁾	15	50 (D)	19 × 1.5	See diagrams ²⁾	16	342493 	344582 
	20	50 (D)	23 × 1.5		16	344534 	344863 
	25	63 (E)	29 × 1.5		16	344535 	352203 
	32	63 (E)	35 × 1.5		16	344536 	352390 
	40	63 (E)	41 × 1.5		16	344537 	352207 
	50	63 (E)	53 × 1.5		16	341778 	352461 
	65	80 (F)	70 × 2.0		14	344625 	367783 
ASME BPE							
A (CF A) see control functions ¹⁾	½	50 (D)	12.7 × 1.65	See diagrams ²⁾	16	344728 	o. r.
	¾	50 (D)	19.05 × 1.65		16	344729 	o. r.
	1	63 (E)	25.4 × 1.65		16	344730 	344556 
	1½	63 (E)	38.1 × 1.65		16	344731 	o. r.
	2	63 (E)	50.8 × 1.65		16	344602 	o. r.

o. r. = on request

1.) For more information, refer to the chapter "3. Control functions" on page 6.

2.) See diagrams in chapter "Pilot pressure diagram with flow direction above seat (control function A, seat seal PTFE)" on page 20

Further variants on request

 Approval Food processing, drinking water, oxygen, fuel gases, explosion protection	 Pressure Other variants for operating pressures up to 25 bar(g) Vacuum variant down to -0.9 bar(g)
	 Temperature High temperature variant up to +230 °C Hot water variant up to +200 °C Low temperature variant down to -40 °C
 Process connection Clamp connection, threaded connection	

10.6. Ordering chart clamp connection

Valve with flow direction below seat

Note:

The following tables refer to valves with stainless steel body.

Control function	Nominal diameter (port connection)	Actuator size Ø	Port connection external Ø	Pilot pressure min.	Operating pressure max.	Article no.	
	DN	[mm]	[mm]	[bar(g)]	[bar(g)]	PA actuator	PPS actuator
ISO 2852							
A (CF A) see control functions ¹⁾	15	50 (D)	34.0	4.1	16	345128	o. r.
	20	50 (D)	50.5	4.1	11	345129	o. r.
	25	63 (E)	50.5	4.2	11	345130	344574
	32	80 (F)	50.5	5	14	345131	o. r.
	40	80 (F)	64.0	5	9	345132	o. r.
	50	100 (G)	77.5	4.4	7.2	345133	o. r.
B (CF B) see control functions ¹⁾	15	50 (D)	34.0	See diagrams ²⁾	16	363929	o. r.
	20	50 (D)	50.5		16	345134	o. r.
	25	50 (D)	50.5		16	363930	o. r.
	32	63 (E)	50.5		16	363933	o. r.
	40	63 (E)	64.0		16	363940	o. r.
	50	63 (E)	77.5		13	363942	o. r.
ASME BPE							
A (CF A) see control functions ¹⁾	½	50 (D)	25.0	4.1	16	344632	o. r.
	¾	50 (D)	25.0	4.1	11	344633	o. r.
	1	63 (E)	50.5	4.2	11	344634	o. r.
	1½	80 (F)	50.5	5	9	344635	o. r.
	2	100 (G)	64.0	4.4	7.2	344636	o. r.
B (CF B) see control functions ¹⁾	½	50 (D)	25.0	See diagrams ²⁾	16	o. r.	o. r.
	¾	50 (D)	25.0		16	o. r.	o. r.
	1	50 (D)	50.5		16	o. r.	o. r.
	1½	63 (E)	50.5		16	o. r.	o. r.
	2	63 (E)	64.0		13	o. r.	o. r.

o. r. = on request

1.) For more information, refer to the chapter "3. Control functions" on page 6.

2.) See diagrams in chapter "Pilot pressure diagrams with flow direction below seat (control function B, seat seal PTFE)" on page 18

Valve with flow direction above seat

Control function	Nominal diameter (port connection)	Actuator size Ø	Port connection external Ø	Pilot pressure min.	Operating pressure max.	Article no.	
						PA actuator	PPS actuator
	DN	[mm]	[mm]	[bar(g)]	[bar(g)]		
ISO 2852							
A (CF A) see control functions ¹⁾	15	50 (D)	34.0	See diagrams ²⁾	16	345135 	345145 
	20	50 (D)	50.5		16	345136 	o. r.
	25	63 (E)	50.5		16	345137 	o. r.
	32	63 (E)	50.5		16	345138 	o. r.
	40	63 (E)	64.0		16	345139 	o. r.
	50	63 (E)	77.5		16	345140 	431027 
ASME BPE							
A (CF A) see control functions ¹⁾	½	50 (D)	25.0	See diagrams ²⁾	16	344721 	o. r.
	¾	50 (D)	25.0		16	344722 	o. r.
	1	63 (E)	50.5		16	344723 	o. r.
	1½	63 (E)	50.5		16	344724 	o. r.
	2	63 (E)	64.0		16	344725 	o. r.

o. r. = on request

1.) For more information, refer to the chapter "3. Control functions" on page 6.

2.) See diagrams in chapter "Pilot pressure diagram with flow direction above seat (control function A, seat seal PTFE)" on page 20

Further variants on request

	Approval Food processing, drinking water, oxygen, fuel gases, explosion protection		Pressure Other variants for operating pressures up to 25 bar(g) Vacuum variant down to -0.9 bar(g)
	Material Seal: NBR, FKM, EPDM		Temperature High temperature variant up to + 230 °C Hot water variant up to + 200 °C Low temperature variant down to - 40 °C
	Process connection Clamp connection acc. to DIN 32676, welded connection, threaded connection		

10.7. Ordering chart accessories

Accessories for 3/2-way pilot valves with banjo bolts

Note:

- Seal material FKM / NBR
- For complete program, see data sheet **Type 7012 ▶, Type 6014 ▶, Type 2507 ▶, Type 2518 ▶**

Valves for actuator size Ø	Type	Pilot air port	Working port (banjo bolt)	Q _{Nn} value air	Pressure range	Electrical coil connection Industry standard	Power consumption	Article no.			
								Voltage/Frequency		Cable plug	
								024 V/DC	230 V/50	12...24 AC/DC with LED	0...250 AC/DC
[mm]				[l/min]	[bar(g)]		[W]	[V]	[V]	[V]	[V]
40 (C)	7012	Thread G ¼	Thread G ⅝	48	0...10	Type 2507 Form B	4	20077598 ฿	20077609 ฿	423849 ฿	423845 ฿
		Push-in connector Ø 6 mm						20087641 ฿	20096098 ฿		
		Thread G ¼	Thread G ¼					20077514 ฿	20077519 ฿		
		Push-in connector Ø 6 mm						20087628 ฿	20092512 ฿		
50 (D)... 63 (E)											
50 (D)... 125 (H)	6014P	Thread G ¼	Thread G ¼	120	0...10	Type 2518 Form A	8	334870 ฿	389550 ฿	314812 ฿	314802 ฿